

Product overview

2.1 Properties

Article number

6ES7132-6HD01-0BB1 (number in package unit: 1 unit)

6ES7132-6HD01-2BB1 (number in package unit: 10 units)

View of the module

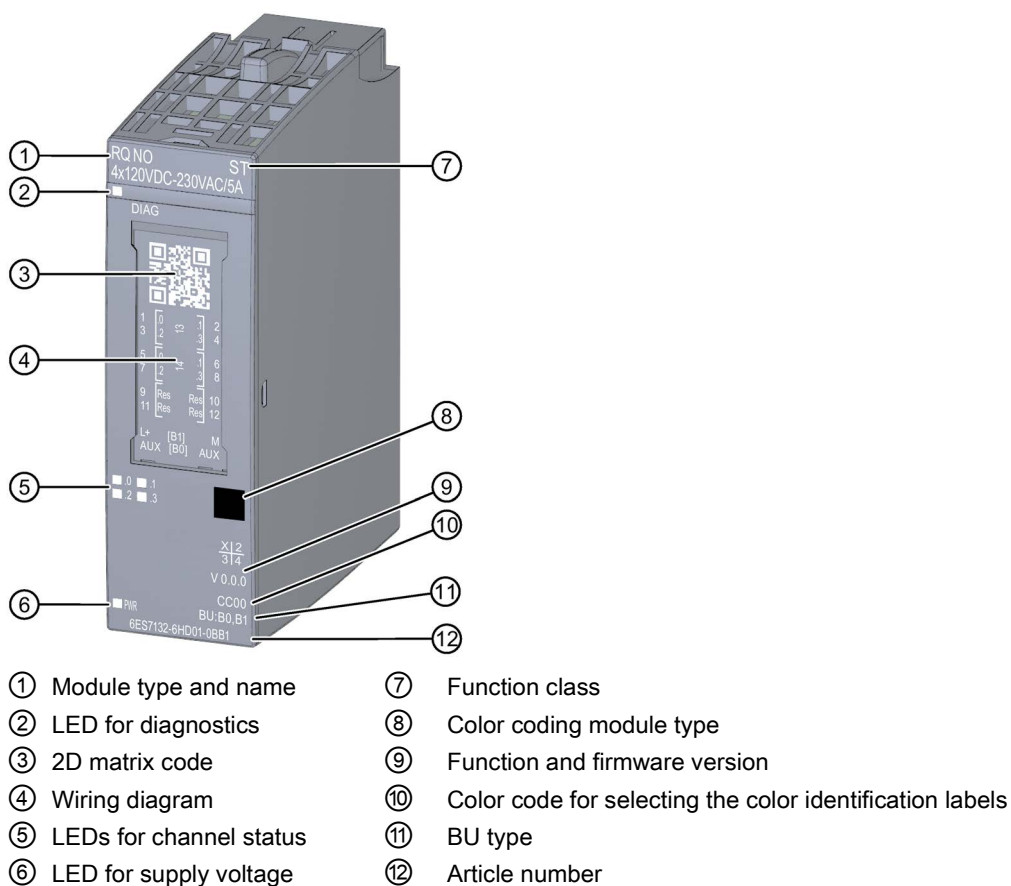


Figure 2-1 View of the RQ 4x120VDC-230VAC/5A NO ST module

Technical specifications

6.1 Technical specifications

Technical specifications of the RQ 4×120VDC-230VAC/5A NO ST

Article number	6ES7132-6HD01-0BB1
General information	
Product type designation	RQ 4x120 VDC ... 230 VAC/5 A NO ST
Firmware version	V0.0
• FW update possible	No
usable BaseUnits	BU type B0, B1
Color code for module-specific color identification plate	CC40
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/integrated as of version	V14
• STEP 7 configurable/integrated as of version	V5.5 SP3
• PCS 7 configurable/integrated as of version	V8.1 SP1
• PROFIBUS as of GSD version/GSD revision	One GSD file each, Revision 3 and 5 and higher
• PROFINET as of GSD version/GSD revision	GSDML V2.3
Operating mode	
• DQ	Yes
• DQ with energy-saving function	No
• PWM	No
• Oversampling	No
• MSO	No
Redundancy	
• Redundancy capability	Yes
Supply voltage	
Rated value (DC)	24 V
permissible range, lower limit (DC)	19.2 V
permissible range, upper limit (DC)	28.8 V
Reverse polarity protection	Yes

6.1 Technical specifications

Article number	6ES7132-6HD01-0BB1
Input current	
Current consumption (rated value)	55 mA; without load
Output voltage	
Rated value (AC)	230 V
Power loss	
Power loss, typ.	1.5 W
Address area	
Address space per module	
• Inputs	+ 1 byte for QI information
• Outputs	1 byte
Hardware configuration	
Automatic encoding	Yes
• Mechanical coding element	Yes
Digital outputs	
Type of digital output	Relays
Number of digital outputs	4
Current-sinking	Yes
Current-sourcing	Yes
Short-circuit protection	No
Parallel switching of two outputs	
• for logic links	Yes
• for uprating	No
• for redundant control of a load	Yes
Switching frequency	
• with resistive load, max.	2 Hz
• with inductive load, max.	0.5 Hz
• on lamp load, max.	2 Hz
Total current of the outputs	
• Current per channel, max.	5 A
• Current per module, max.	20 A
Total current of the outputs (per module)	
horizontal installation	
– up to 50 °C, max.	20 A
– up to 60 °C, max.	16 A
vertical installation	
– up to 40 °C, max.	20 A
– up to 50 °C, max.	16 A; in all other mounting positions

Article number	6ES7132-6HD01-0BB1
Relay outputs	
• Number of relay outputs	4
• Rated supply voltage of relay coil L+ (DC)	24 V
• Current consumption of relays (coil current of all relays), max.	40 mA
• external protection for relay outputs	Yes, with 6A
• Number of operating cycles, max.	7 000 000; see additional description in the manual
Switching capacity of contacts	
– with inductive load, max.	2 A; see additional description in the manual
– with resistive load, max.	5 A; see additional description in the manual
– Thermal continuous current, max.	5 A; Max. 1 385 VA, 150 W
– Switching current, min.	100 mA; 5 V DC
– Rated switching voltage (DC)	24 V DC to 120 V DC
– Rated switching voltage (AC)	24V AC to 230V AC
Cable length	
• shielded, max.	1 000 m
• unshielded, max.	200 m
Isochronous mode	
Isochronous operation (application synchronized up to terminal)	No
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnostic messages	
• Monitoring the supply voltage	Yes
• Wire-break	No
• Short-circuit	No
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; Green LED
• for channel diagnostics	No
• for module diagnostics	Yes; green/red DIAG LED

6.1 Technical specifications

Article number	6ES7132-6HD01-0BB1
Potential separation	
Potential separation channels	
• between the channels	Yes
• between the channels and backplane bus	Yes
• between the channels and the power supply of the electronics	Yes
Permissible potential difference	
between channels and backplane bus/supply voltage	240 V AC
Isolation	
Isolation tested with	2 500 V DC (type test)
tested with	
• between channels and backplane bus/supply voltage	2500 V DC
• between backplane bus and supply voltage	707 V DC (type test)
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C; in all other mounting positions
• vertical installation, max.	50 °C; in all other mounting positions
Altitude during operation based on sea level	
• Ambient air temperature-barometric pressure-altitude	On request: Ambient temperatures lower than 0 °C (without condensation) and/or installation altitudes greater than 2 000 m
Dimensions	
Width	20 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	40 g