
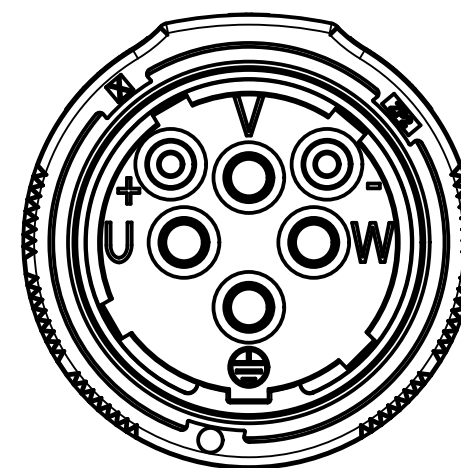
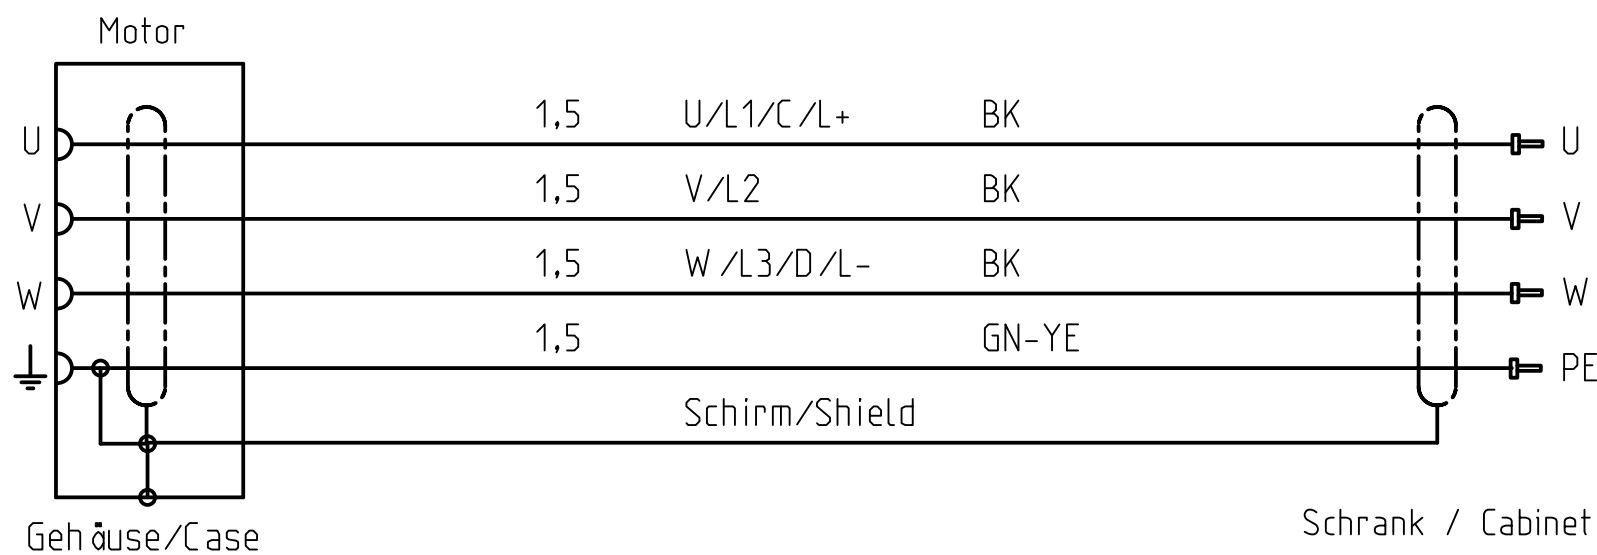



CAD-Drawing
Manual modification
prohibited

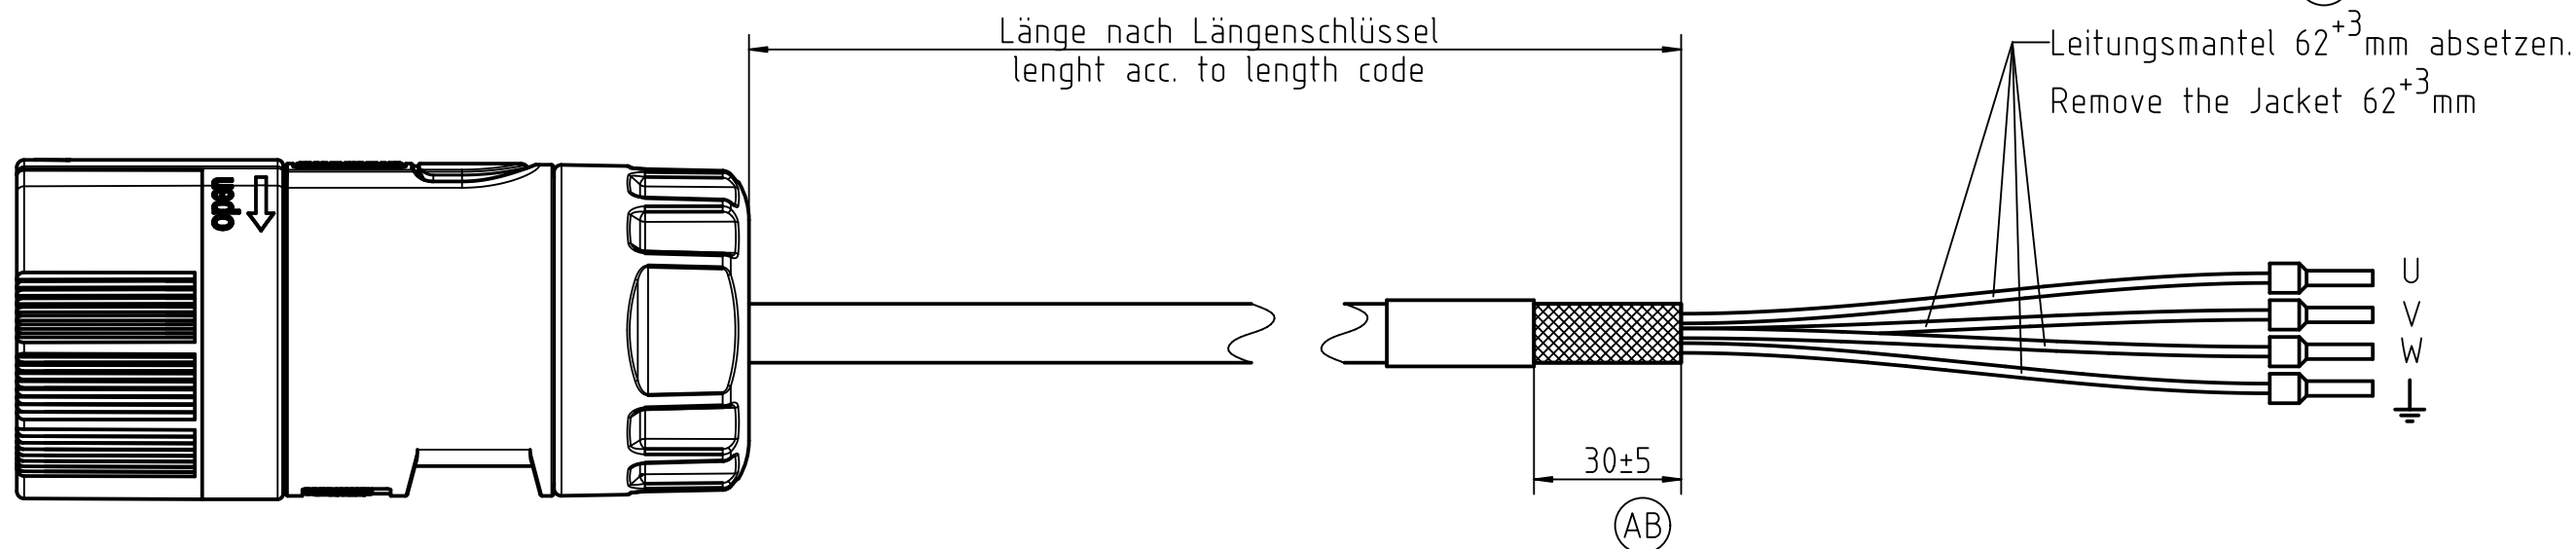

<u>Schnellverschluss / speed - connect</u> MLFB der konfekt. Leitung 6FX5002-5CF14 *) MLFB of the cord set 6FX8002-5CF14 *)		
Komponenten / Components		
Stecker / connector 6FX2003-0LU40	Kabel / raw cable 6FX5008-1BB11 6FX8008-1BB11	Aderendhülse isoliert / tabular end-sleeve insulated: DIN 46228 - E1,5 - 8

*) Bestellbarkeit nach Katalog
deliverable acc. to catalog

Belonging to this:

DIN 6  First angle projection		Allg.Toleranz: ISO 2768-mK Tolerierung ISO 8015 Tolerances:		Surface:		Doc.-number: A5E03364146C		Scale: 1:1		kg/piece: -	
				Date: 11.11.2010		-		-		A3	
				Author: Kraus		Material:				Sheetsiz	
				Check: Hentschel		Leistungsleitung 4x1.5					
						Gr.1.5 Speed-Connect					
				Dep.: 1 DT MC R&D 96		Name:					
				Site: Erlangen F80		Typ/MLFB: 6FX_002-5CF14					
				SIEMENS		A5E03364146		TA		AB	
AB P5A00016305		04.10.2012		DM		Article:		Doc.type		Revision	
AA 79C66114		11.11.2010		AK		Replacement for / replaced by:				Sheet:	
Rev. Modification		Date		Name						I Sheets:	