

Series V7-W Terminals

A comprehensive selection of rugged connections



Sprecher + Schuh's new V7-W terminals are designed to meet the three most important criteria when selecting a terminal block line – ease of wiring, secure connections and durability. The line is also comprehensive, offering a wide array of terminal types for most circuits and functions, from control to low level power.

The size you need

V7-W feed-through terminals come in ten sizes and are rated to 600VAC (800V-IEC). They accommodate a full range of wire sizes from 30AWG to 3/0 AWG (0.5mm² to 70mm² wire cross section). Many “specialty” feed-through terminals are also available that provide multiple terminations or increase the density of connections. This reduces panel space and saves money.

Comprehensive selection of special terminals

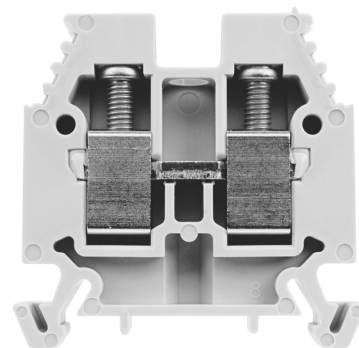
Aside from the broad selection of standard feed-through terminals, many special terminals are also part of the new V7-W line, including:

- Two level terminals
- High Current terminals
- Ground terminals
- Dual connection terminals
- Diode terminals
- Plug-in style terminals
- Various isolating terminals
- Fuse terminals
- Sensor terminals
- Thermocouple terminals
- Proximity switch terminals

Even the most varied circuit requirements can be supported by the broad selection offered with this line.

Super reliable connections

The most important aspect of a terminal block is to join wires in a reliable connection. With V7-W terminals, a cone shaped guide allows easy insertion of the wire into a nickel plated barrel. As tightening torque is applied to strong stainless steel screws, the wire is secured between a recessed contact



Stainless steel screws and nickel plated current bars provide a strong, corrosion resistant connection

pad and serrated current bar. This corrosion-resistant clamping mechanism provides excellent performance in the most demanding industrial conditions.







Superior insulation and protection features

All metal parts are recessed, providing a touch-safe, dead front design for optimum safety. Terminal bodies are manufactured from Polyamide 6.6, known for its excellent thermal stability, impact resistance and resistance to electrical creepage. The insulating cases are rated up to 90°C (195°) for continuous operation. They also stay elastic down to -40°C (-40°F) without fracturing.

International approvals

Sprecher + Schuh's V7-W terminal block line is UL recognized and CSA Certified. Many terminals have also been certified for use in hazardous locations. The line also carries the CE Mark for use in most international markets.

Quick Selection Guide (refer to page indicated for complete information and detailed pricing)

Terminal	Description	Type	Overall Term. Width	Cross-sec. [mm²]	Catalog Number	See Page...
Isolation and Plug-in Style Blocks <i>(continued)</i>						
Inserts for V7-W4P— Order Separately						
	Disconnect Plug				V7-DP4	N28
	Component Plug				V7-CP4	N28
	Fuse Plug	5 x 20 mm; without indication 5 x 20 mm; with LED 5 x 20 mm; with LED			V7-FP4 V7-FP424 V7-FP4250	N28
Two Level Component Terminals						
	Diode Terminals	with a fixed connection with a diode in forward bias with a diode in reverse bias	6 6 6	4 4 4	V7-WD4C V7-WD4DF V7-WD4DR	N22
Fusible Terminals						
	Fuse Terminals (fuses not supplied)	5 x 20 mm, without indication	8	4	V7-WFB4	N13
		5 x 20 mm, without indication	8	4	V7-WFB10V	N15
		5 x 20 mm, with LED	8	4	V7-WFB424	N13
		5 x 20 mm, with neon lamp	8	4	V7-WFB4250	N13
		6.3 x 32 mm, without indication	9	4	V7-H6	N14
		6.3 x 32 mm, without indication	9	4	V7-WFB10VA	N15
		6.3 x 32 mm, with LED	9	4	V7-H5	N14
		6.3 x 32 mm, with neon lamp	9	4	V7-H4	N14
Sensor Terminals						
	Sensor Supply Terminal (Initiator)	without LED with LED PNP with LED NPN	5 5 5	2.5 2.5 2.5	V7-WTF3 V7-WTF3LP V7-WTF3LN	N18 N18 N18
	Sensor Terminal (Initiator)	no indicator with LED PNP with LED NPN	5 5 5	2.5 2.5 2.5	V7-WTS3 V7-WTS3LP V7-WTS3LN	N19 N19 N19
Thermocouple Terminals						
	Thermocouple Terminals	Chromel / Constantan Iron / Constantan Copper / Constantan	10 10 10	2.5 2.5 2.5	V7-WTC3E V7-WTC3J V7-WTC3T	N23 N23 N23

Sensor Blocks

Ordering and Technical Information ❶	2.5mm ²			2.5mm ²			2.5mm ²		
	Three circuit terminal block			Three circuit terminal block with LED indicator for PNP devices			Three circuit terminal block with LED indicator for NPN devices		
	Catalog Number	Price Ea. (Std Pkg)	Pkg. Qty	Catalog Number	Price Ea. (Std Pkg)	Pkg. Qty	Catalog Number	Price Ea. (Std Pkg)	Pkg. Qty
Terminal - Gray	V7-WTF3	9.90	50	V7-WTF3LP ❶	20.50	50	V7-WTF3LN ❶	20.50	50
Accessories (also see pages N26 - N31)									
End Barrier	V7-EBTF3	1.95	50	V7-EBTF3	1.95	50	V7-EBTF3	1.95	50
End Anchors									
DIN Rail — Normal Duty	V7-EA35	1.75	50	V7-EA35	1.75	50	V7-EA35	1.75	50
DIN Rail — Heavy Duty	V7-EAH35	7.00	10	V7-EAH35	7.00	10	V7-EAH35	7.00	10
DIN Rail — Snap-in	V7-ER35	1.80	50	V7-ER35	1.80	50	V7-ER35	1.80	50
Jumpers									
Side Jumper — 20-pole Insulated - Red	V7-SJT5-20-R	10.50	10	V7-SJT5-20-R	10.50	10	V7-SJT5-20-R	10.50	10
Side Jumper — 20-pole Insulated - Blue	V7-SJT5-20-B	10.50	10	V7-SJT5-20-B	10.50	10	V7-SJT5-20-B	10.50	10
Center Jumper — 50-pole	V7-CJT5-50	42.00	5	V7-CJT5-50	42.00	5	V7-CJT5-50	42.00	5
Center Jumper — 10-pole	V7-CJT5-10	10.00	10	V7-CJT5-10	10.00	10	V7-CJT5-10	10.00	10
Center Jumper Link	V7-CJL5	1.35	10	V7-CJL5	1.35	10	V7-CJL5	1.35	10
Other Accessories									
Partition Plate	V7-PPTS3	1.25	50	V7-PPTS3	1.25	50	V7-PPTS3	1.25	50
Test Plug Adaptor	V7-TA285	17.75	10	V7-TA285	17.75	10	V7-TA285	17.75	10
Electrical Warning Plate (1-pole)	V7-EWP5-4	2.25	10	V7-EWP5-4	2.25	10	V7-EWP5-4	2.25	10
Group Marking Carrier	V7-GM35	3.60	10	V7-GM35	3.60	10	V7-GM35	3.60	10
Marking Systems ❷									
Blank Tags (cards of 100) ❷	V7-SM5X9	12.00	5	V7-SM5X9	12.00	5	V7-SM5X9	12.00	5
Pre-printed Tags (sticks of 10)	V7-MP5 ❸	2.70	10	V7-MP5 ❸	2.70	10	V7-MP5 ❸	2.70	10
Terminal Block Specifications									
Approvals	UL	UL	IEC	UL	UL	IEC	UL	UL	IEC
Voltage Rating	300V	300V	250V AC/DC	300V AC/DC	300V AC/DC	250V AC/DC	50V AC/DC	50V AC/DC	250V AC/DC
Maximum Current	10 A	10 A	24 A	10 A	10 A	24 A	10 A	10 A	24 A
Wire Range (Rated Cross Section)	#26... #14 AWG	#26... #14 AWG	0.5...2.5 mm ²	#26... #14 AWG	#26... #14 AWG	0.5...2.5 mm ²	#26... #14 AWG	#26... #14 AWG	0.5...2.5 mm ²
Leakage Current				2.69mA @ 50V			2.69mA @ 50V		
Wire Strip Length	0.31" (8 mm)			0.31" (8 mm)			0.31" (8 mm)		
Recommended Tightening Torque	4.2...4.6 lb-in. (0.5 Nm)			4.2...4.6 lb-in. (0.5 Nm)			4.2...4.6 lb-in. (0.5 Nm)		
Density	60 pcs./ft (197/m)			60 pcs./ft (197/m)			60 pcs./ft (197/m)		
Insulation Temperature Range	-40°...+195°F (-40°...+90°C)			-40°...+195°F (-40°...+90°C)			-40°...+195°F (-40°...+90°C)		
Mounting Rail	Fits all types shown on page N32			Fits all types shown on page N32			Fits all types shown on page N32		
Wiring Diagram	See page N35								

❶ May require special order with minimum quantities.

❷ Custom marking tags available. See page N45 for full offering.

❸ Catalog number is not complete. See pages N42...N43.