



Digital module, 4 inputs and 2 relay outputs, input voltage 24 V DC, relay outputs monostable, max. 2 digital modules, for SIMOCODE pro V basic unit

product brand name	SIRIUS
product designation	digital modules
General technical data	
product component	
• input for thermistor connection	No
• digital input	Yes
• input for analog temperature sensors	No
• input for ground fault detection	No
• relay output	Yes
insulation voltage with degree of pollution 3 at AC rated value	300 V
surge voltage resistance rated value	4 000 V
protection class IP	IP20
shock resistance acc. to IEC 60068-2-27	15g / 11 ms
vibration resistance acc. to IEC 60068-2-6	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
switching capacity current of the NO contacts of the relay outputs at AC-15	
• at 24 V	6 A
• at 120 V	6 A
• at 230 V	3 A
switching capacity current of the NO contacts of the relay outputs at DC-13	
• at 24 V	2 A
• at 60 V	0.55 A
• at 125 V	0.25 A
mechanical service life (switching cycles) typical	10 000 000
electrical endurance (switching cycles) typical	100 000
reference code acc. to IEC 81346-2	K
continuous current of the NO contacts of the relay outputs	
• at 50 °C	6 A
• at 60 °C	5 A
certificate of suitability according to ATEX directive 2014/34/EU	BVS 06 ATEX F001
explosion device group and category according to ATEX directive 2014/34/EU	II (2) G, II (2) D, I (M2)
Electromagnetic compatibility	
EMC emitted interference acc. to IEC 60947-1	class A
EMC immunity acc. to IEC 60947-1	corresponds to degree of severity 3
conducted interference	

• due to burst acc. to IEC 61000-4-4 • due to conductor-earth surge acc. to IEC 61000-4-5 • due to conductor-conductor surge acc. to IEC 61000-4-5 • due to high-frequency radiation acc. to IEC 61000-4-6	1 kV 2 kV 1 kV 10 V
field-based interference acc. to IEC 61000-4-3	10 V/m
electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
conducted HF interference emissions acc. to CISPR11	corresponds to degree of severity A
field-bound HF interference emission acc. to CISPR11	corresponds to degree of severity A
Inputs/ Outputs	
product function	
• parameterizable inputs • parameterizable outputs	Yes Yes
number of inputs	4
number of digital inputs	4
• with a common reference potential	4
digital input version	
• type 1 acc. to IEC 61131 • type 2 acc. to IEC 61131	No Yes
number of analog inputs	0
input voltage at digital input at DC rated value	24 V
number of outputs	2
number of semiconductor outputs	0
number of outputs as contact-affected switching element	2
number of analog outputs	0
switching behavior	monostable
property of contacts of the relay outputs	Floating NO contacts (NC reaction parameterizable via internal signal conditioning), connected to common ground, can be freely assigned to the control functions (e.g. line, star (wye), delta contactor or signaling of the operating state)
wire length for digital signals maximum	300 m
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting
height	92 mm
width	22.5 mm
depth	124 mm
required spacing	
• top • bottom • left • right	40 mm 40 mm 0 mm 0 mm
Connections/ Terminals	
product function removable terminal for auxiliary and control circuit	Yes
type of connectable conductor cross-sections	
• solid • finely stranded with core end processing • at AWG cables solid • at AWG cables stranded	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²) 1x (20 ... 14), 2x (20 ... 16) 1x (20 ... 12), 2x (20 ... 14)
• tightening torque with screw-type terminals • tightening torque [lbf·in] with screw-type terminals	0.8 ... 1.2 N·m 7 ... 10.3 lbf·in
Ambient conditions	
installation altitude at height above sea level	
• 1 maximum • 2 maximum • 3 maximum	2 000 m 3 000 m; max. +50 °C (no protective separation) 4 000 m; max. +40 °C (no protective separation)

environmental category		
● during operation acc. to IEC 60721	3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6	
● during storage acc. to IEC 60721	3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6	
● during transport acc. to IEC 60721	3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6	
relative humidity during operation	5 ... 95 %	
contact rating of auxiliary contacts according to UL	B300 / R300	
Short-circuit protection		
design of short-circuit protection per output	Fuse links: gG 6 A, quick-response 10 A (IEC 60947-5-1), miniature circuit-breaker C char.: 1.6 A (IEC 60947-5-1) or 6 A (I_K < 500 A)	
Safety related data		
touch protection against electrical shock	finger-safe	
Galvanic isolation		
(electrically) protective separation acc. to IEC 60947-1	All circuits with protective separation (double creepage paths and clearances), the information in the "Protective Separation" test report, No. A0258, must be observed (link see further information)	
Control circuit/ Control		
type of voltage of the control supply voltage	DC	
control supply voltage at DC		
● rated value	24 V	
operating range factor control supply voltage rated value at DC		
● initial value	0.8	
● full-scale value	1.2	
Certificates/ approvals		
General Product Approval	EMC	For use in hazardous locations



For use in hazardous locations	Declaration of Conformity	Test Certificates	Marine / Shipping
--------------------------------	---------------------------	-------------------	-------------------



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping	other
-------------------	-------



[Confirmation](#)

[PROFINET-Certification](#)



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7300-1AB00-0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7300-1AB00-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3UF7300-1AB00-0>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7300-1AB00-0&lang=en

Test report No. A0258, protective separation

<https://support.industry.siemens.com/cs/ww/en/view/109748152>

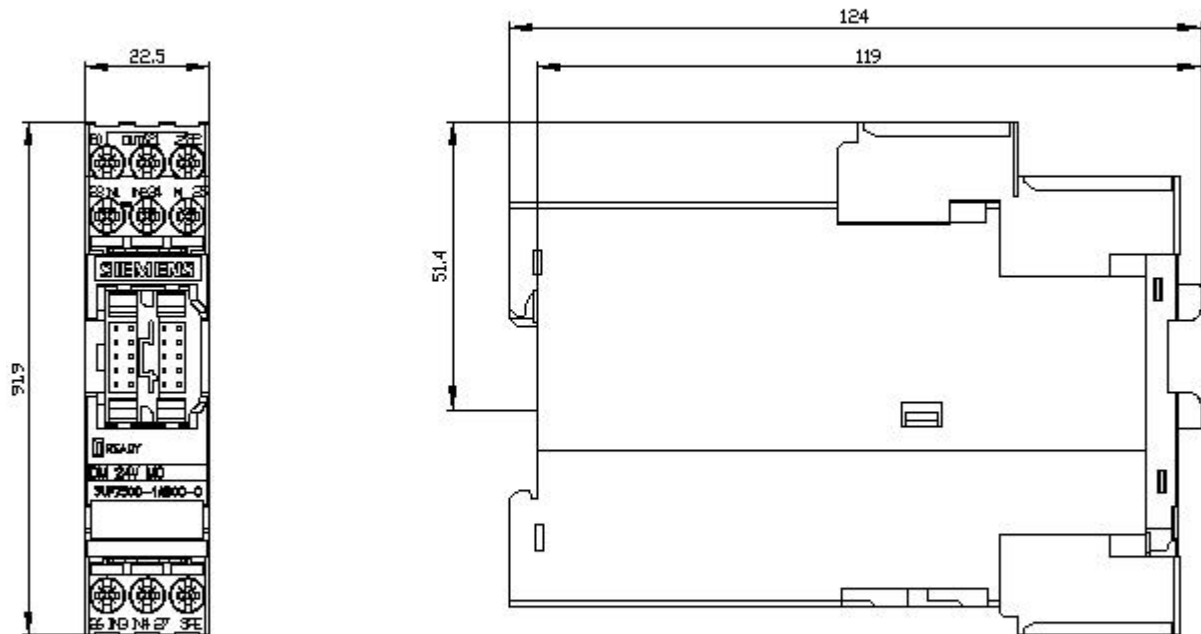

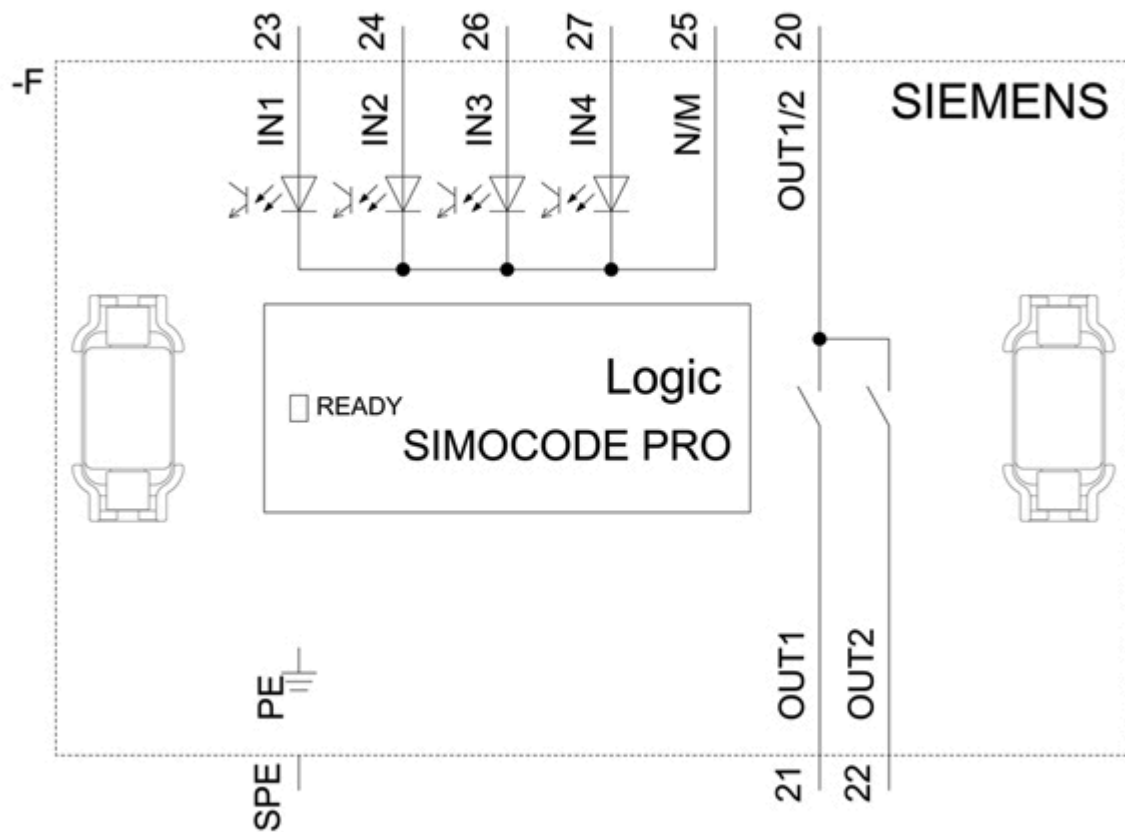

last modified:

1/18/2021 