



Digital module, 4 inputs and 2 relay outputs, input voltage 24 V DC, relay outputs bistable, max. 2 digital modules, for SIMOCODE pro V basic unit

product brand name	SIRIUS
product designation	digital modules
General technical data	
product component	
input for thermistor connection	No
digital input	Yes
input for analog temperature sensors	No
input for ground fault detection	No
relay output	Yes
insulation voltage with degree of pollution 3 at AC rated value	300 V
surge voltage resistance rated value	4 000 V
protection class IP	IP20
shock resistance acc. to IEC 60068-2-27	15g / 11 ms
vibration resistance acc. to IEC 60068-2-6	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
switching capacity current of the NO contacts of the relay outputs at AC-15	
at 24 V	6 A
at 120 V	6 A
at 230 V	3 A
switching capacity current of the NO contacts of the relay outputs at DC-13	
at 24 V	2 A
at 60 V	0.55 A
at 125 V	0.25 A
mechanical service life (switching cycles) typical	10 000 000
electrical endurance (switching cycles) typical	100 000
reference code acc. to IEC 81346-2	K
continuous current of the NO contacts of the relay outputs	
at 50 °C	6 A
at 60 °C	5 A
Electromagnetic compatibility	
EMC emitted interference acc. to IEC 60947-1	class A
EMC immunity acc. to IEC 60947-1	corresponds to degree of severity 3
conducted interference	
due to burst acc. to IEC 61000-4-4	1 kV
due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV

• due to high-frequency radiation acc. to IEC 61000-4-6	10 V
field-based interference acc. to IEC 61000-4-3	10 V/m
electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
conducted HF interference emissions acc. to CISPR11	corresponds to degree of severity A
field-bound HF interference emission acc. to CISPR11	corresponds to degree of severity A
Inputs/ Outputs	
product function	
• parameterizable inputs	Yes
• parameterizable outputs	Yes
number of inputs	4
number of digital inputs	4
• with a common reference potential	4
digital input version	
• type 1 acc. to IEC 61131	No
• type 2 acc. to IEC 61131	Yes
number of analog inputs	0
input voltage at digital input at DC rated value	24 V
number of outputs	2
number of semiconductor outputs	0
number of outputs as contact-affected switching element	2
number of analog outputs	0
switching behavior	bistable
property of contacts of the relay outputs	Floating NO contacts (NC reaction parameterizable via internal signal conditioning), connected to common ground, can be freely assigned to the control functions (e.g. line, star (wye), delta contactor or signaling of the operating state)
wire length for digital signals maximum	300 m
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting
height	92 mm
width	22.5 mm
depth	124 mm
required spacing	
• top	40 mm
• bottom	40 mm
• left	0 mm
• right	0 mm
Connections/ Terminals	
product function removable terminal for auxiliary and control circuit	Yes
type of connectable conductor cross-sections	
• solid	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
• finely stranded with core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
• at AWG cables solid	1x (20 ... 14), 2x (20 ... 16)
• at AWG cables stranded	1x (20 ... 12), 2x (20 ... 14)
tightening torque with screw-type terminals	0.8 ... 1.2 N·m
tightening torque [lbf·in] with screw-type terminals	7 ... 10.3 lbf·in
Ambient conditions	
installation altitude at height above sea level	
• 1 maximum	2 000 m
• 2 maximum	3 000 m; max. +50 °C (no protective separation)
• 3 maximum	4 000 m; max. +40 °C (no protective separation)
environmental category	
• during operation acc. to IEC 60721	3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
• during storage acc. to IEC 60721	3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6

• during transport acc. to IEC 60721	3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
relative humidity during operation	5 ... 95 %
contact rating of auxiliary contacts according to UL	B300 / R300

Short-circuit protection

design of short-circuit protection per output	Fuse links: gG 6 A, quick-response 10 A (IEC 60947-5-1), miniature circuit-breaker C char.: 1.6 A (IEC 60947-5-1) or 6 A (I _N < 500 A)
---	---

Safety related data

touch protection against electrical shock	finger-safe
---	-------------

Galvanic isolation

(electrically) protective separation acc. to IEC 60947-1	All circuits with protective separation (double creepage paths and clearances), the information in the "Protective Separation" test report, No. A0258, must be observed (link see further information)
--	--

Control circuit/ Control

type of voltage of the control supply voltage	DC
control supply voltage at DC	
• rated value	24 V
operating range factor control supply voltage rated value at DC	
• initial value	0.8
• full-scale value	1.2

Certificates/ approvals

General Product Approval	EMC	For use in hazardous locations
--------------------------	-----	--------------------------------



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



other

[Confirmation](#)

[PROFINET-Certification](#)



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7310-1AB00-0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7310-1AB00-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3UF7310-1AB00-0>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7310-1AB00-0&lang=en

Test report No. A0258, protective separation

<https://support.industry.siemens.com/cs/ww/en/view/109748152>

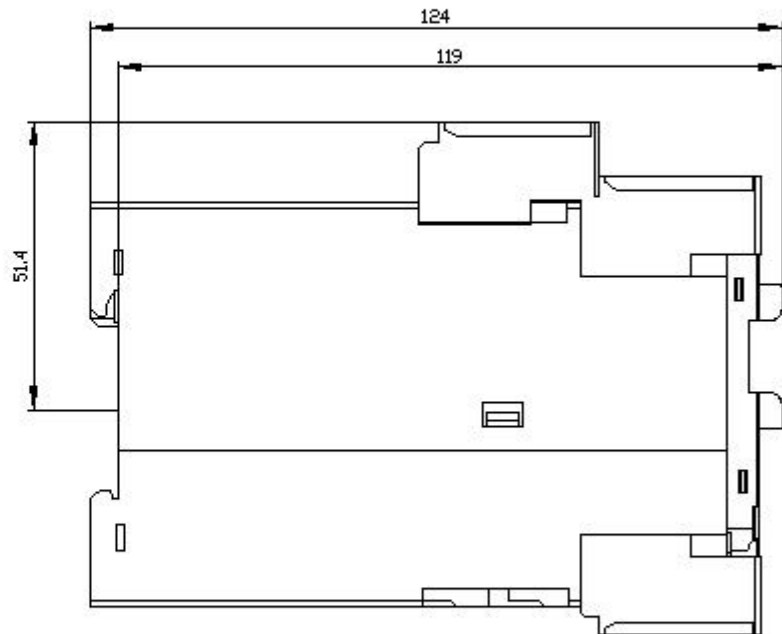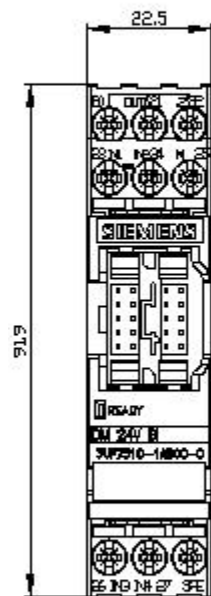

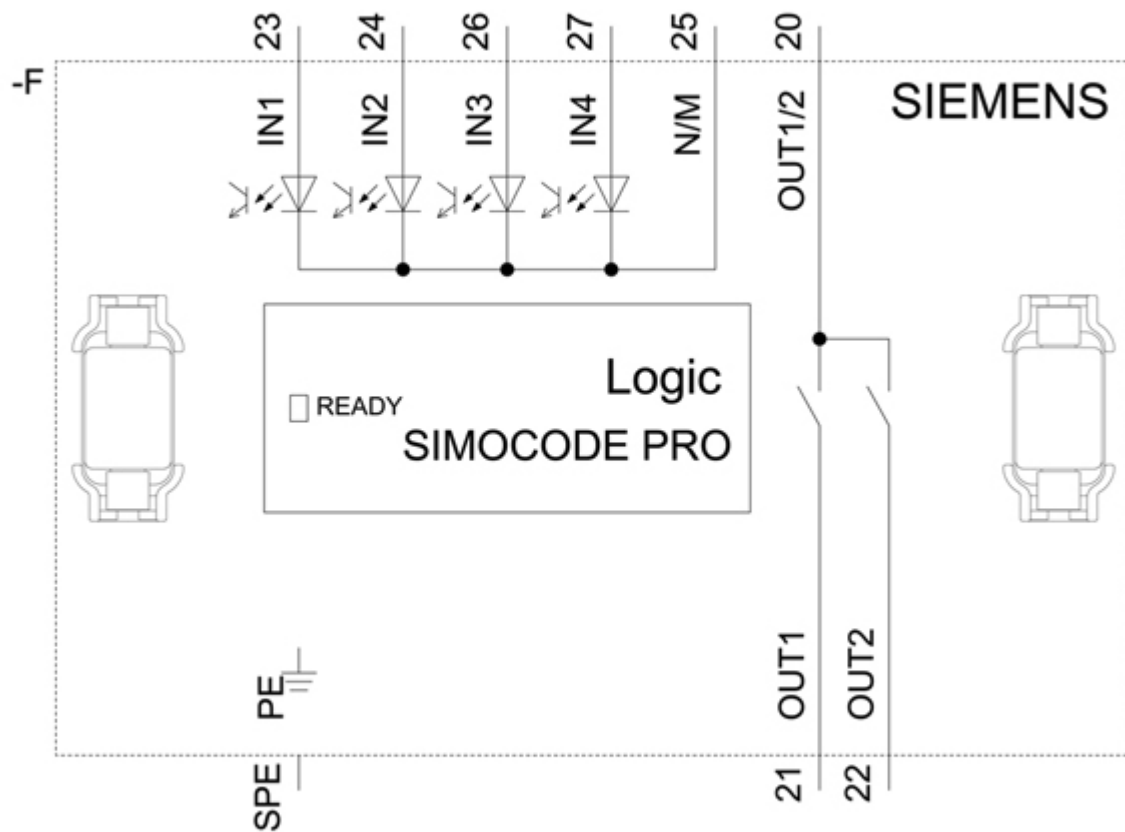

last modified:

1/10/2021 