

AS-i SlimLine module Phased-out product !!! For further information, please contact our sales department S22.5 digital 4 DI, IP20 4 x inputs for 3-wire sensor Screw terminals Overall width 22.5 mm



Figure similar

General technical data		
Design of the product		SlimLine S22.5 - I/O modules for operation in the control cabinet, IP20
Design of the slave type		standard slave
Type		4 inputs
I/O configuration		0
ID/ID2 code		0/F
Protocol is supported AS-Interface protocol		Yes
AS interface total current input max	mA	270
operating voltage according to AS-Interface spezifikation	V	26.5 ... 31.6
Addressing		front addressing socket
Type of electrical connection of the inputs and outputs		screw-type terminals
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		A
Reference code acc. to DIN EN 61346-2		K

note		An external additional supply (AUX POWER) of 20 to 30 V DC is required for the supply of the output circuits. The additional supply must comply with VDE 0106 (PELV), protection class III.
-------------	--	---

Sensor supply

Type of voltage supply for power supply		using AS-Interface
Input voltage	V	20 ... 30
Property of the sensor supply Short-circuit and overload resistant		Yes
Ampacity of the sensor supply for all inputs • at ambient temperature 40 °C	mA	200

Inputs

Number of digital inputs		4
Type of connection		2- and 3-wire technology
Input circuit		PNP transistor
Type of voltage of the input voltages		DC
Inputs switching level High min	V	10
Input current at digital input • for signal <1> minimum • with signal <0> maximum	mA mA	5 1.5
Inputs sensor supply using AS-Interface		short-circuit and overload resistant

Outputs

Number of digital outputs		0
Output voltage at DC at 24 V	V	22 ... 24
Status display • display of I/Os • AS-Interface • FAULT		yellow LED green LED red LED
Assignment of data bits • D0 • D1 • D2 • D3		IN1 IN2 IN3 IN4

Ambient conditions

Ambient temperature • during operation • during storage	°C °C	-25 ... +70 -40 ... +85
Protection class IP		IP20

Mechanical data

Width	mm	22.5
Height	mm	102

Depth	mm	86
Mounting type		35 mm standard rail mounting or wall mounting using push-in lugs
Conductor cross-section		• solid • finely stranded — with end sleeve • AWG solid or stranded

1 x (0.5 - 4) mm² or 2 x (0.5 - 2.5) mm²

1 x (0.5 - 2.5) mm² or 2 x (0.5 - 1.5) mm²

AWG 2 x (20 - 14) mm²

Certificates/approvals

General Product Approval



[Miscellaneous](#)

RCM

EG-Konf.

Shipping Approval



ABS

BUREAU
VERITAS

LRS

PRS

RINA

RMRS

other



ASi

[Confirmation](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1200-0CE02-0AA2>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1200-0CE02-0AA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1200-0CE02-0AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1200-0CE02-0AA2&lang=en

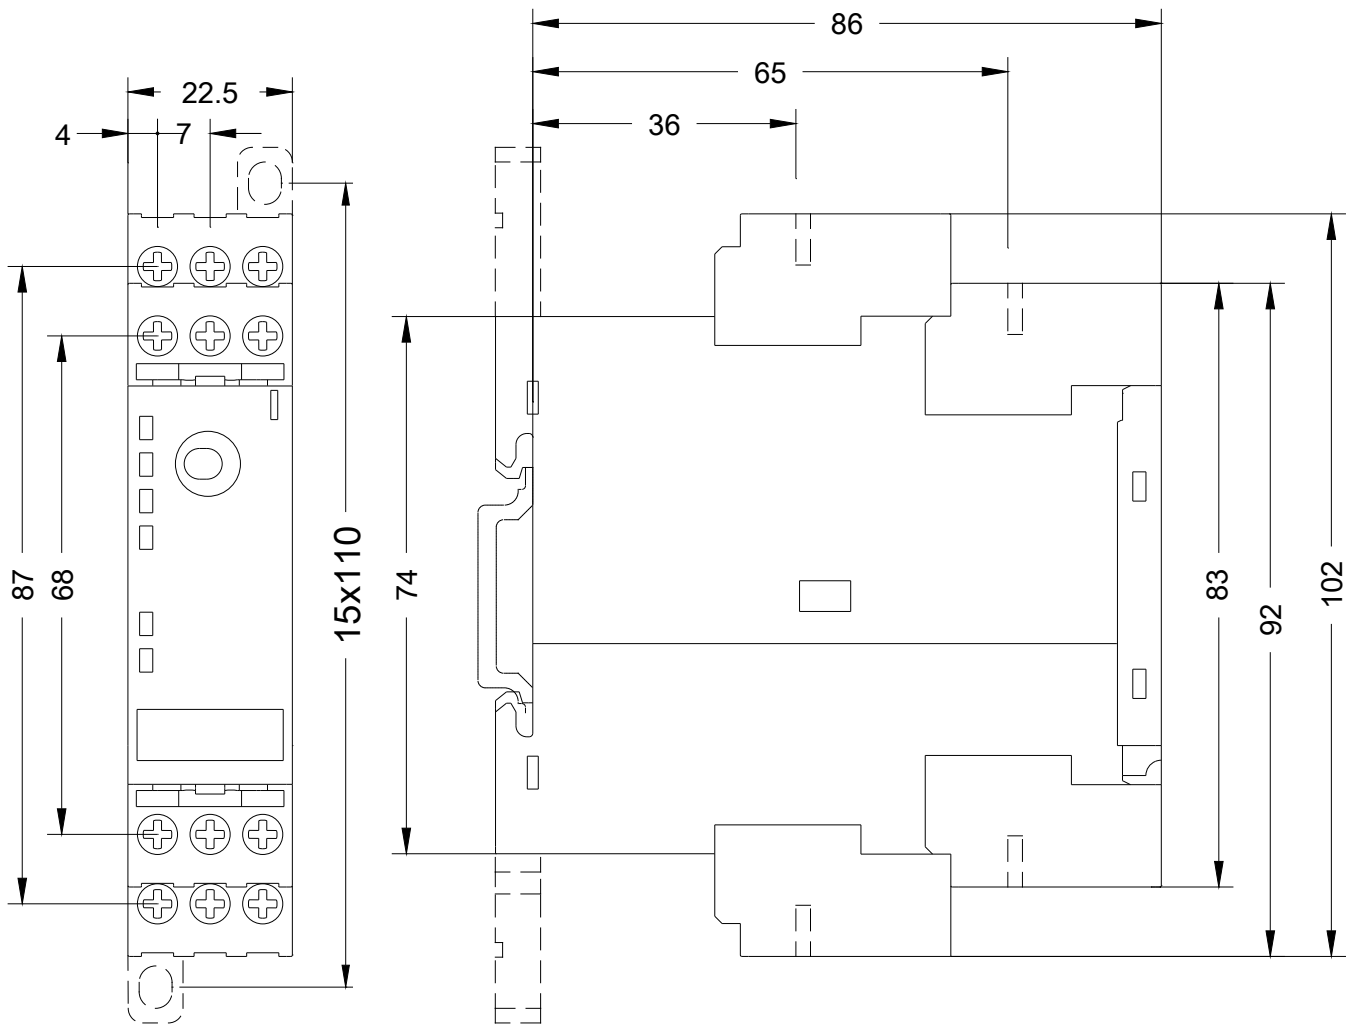

last modified:

07/19/2019