

AS-INTERFACE COMPACT MOD. K60, DIGITAL, 8I, IP67 8 X 1 INPUT, 200MA MAX., PNP 4 X M12 STANDARD SOCKET 4 X M12 SOCKET W. Y-II-ASSIGNM. FOR INPUT CONNECTIONS MOUNTING PLATE 3RK19010CA00 TO TO BE ORDERED SEPARATELY

General technical data:		
Design of the product		digital I/O modules for operation in the field, IP67 - K60
Type		8 inputs
Design of the slave type		standard slave
I/O configuration		0
ID/ID2 code		1/F
Number I/O sockets		8
Type of electrical connection of the inputs and outputs		M12 screw-type terminals
AS interface total current input max	mA	270
operating voltage according to AS-Interface spezifikation	V	26.5 ... 31.6
Ground terminal		PIN5 of each M12 socket is connected to the grounding wrist strap in the mounting plate using a pin
Addressing		front addressing socket
Delivery note		the modules are delivered without mounting plate
note		module requires two addresses

Note 1		All K60 compact modules are delivered with stainless steel screws/sockets
Sensor supply:		
Type of voltage supply for power supply		using AS-Interface
Input voltage	V	20 ... 30
Property of the sensor supply Short-circuit and overload resistant		Yes
Ampacity of the sensor supply for all inputs		
• at ambient temperature 40 °C	mA	200
Inputs:		
Number of digital inputs		8
Type of connection		2- and 3-wire technology
Input circuit		PNP transistor
Type of voltage of the input voltages		DC
Inputs switching level High min	V	10
Input current at digital input		
• for signal <1> minimum	mA	6
• with signal <0> maximum	mA	1.5
Inputs		
• sensor supply using AS-Interface		short-circuit and overload resistant
• socket assignment		
— PIN 1		sensor supply L+
— PIN 2		data input II
— PIN 3		sensor supply L-
— PIN 4		data input I
— PIN 5		ground terminal
Design of the pin assignment of the inputs		Y-II assignment
Outputs:		
Number of digital outputs		0
Outputs external power supply 24 V DC		not required
Design of the pin assignment of the outputs		Y-II assignment
Outputs		
• watchdog		not required
Assignment of the data bits:		
Assignment of data bits		
• socket		PIN 4 = IN1 (D0) (addr. 1), PIN 2 = IN2 (D1) (addr. 1)
• socket 2		PIN 4 = IN2 (D1) (addr. 1)
• socket 3		PIN 4 = IN3 (D2) (addr. 1), PIN 2 = IN4 (D3) (addr. 1)
• socket 4		PIN 4 = IN4 (D3) (addr. 1)
• socket 5		PIN 4 = IN1 (D0) (addr. 2), PIN 2 = IN2 (D1) (addr. 2)
• socket 6		PIN 4 = IN2 (D1) (addr. 2)

- socket 7
- socket 8

PIN4 = IN3 (D2) (addr. 2), PIN2 = IN4 (D3) (addr. 2)
 PIN4 = IN4 (D3) (addr. 2)

Ambient conditions:

Ambient temperature		
• during operation	°C	-25 ... +85
• during storage	°C	-40 ... +85
Protection class IP		IP67

Display:

Status display		
• display of I/Os		yellow LED
• display of Uaux		not required
• display of AS-Interface/diagnostics		green/red LED

Mechanical data:

Width	mm	60
Height	mm	152
Depth	mm	29
Mounting type		standard rail mounting/wall mounting using mounting plate for K60 compact module

Certificates/ approvals:

AS-Interface certificate		yes (or requested for in case of new units)
Approvals		UL, CSA, shipbuilding (or requested for in case of new units)

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity	Shipping Approval
--------------------------	---------------------------------------	---------------------------	-------------------



[sonstig](#)



Shipping Approval	other
-------------------	-------



other

[Umweltbestätigung](#)

[Bestätigungen](#)

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1200-0DQ00-0AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1200-0DQ00-0AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1200-0DQ00-0AA3&lang=en

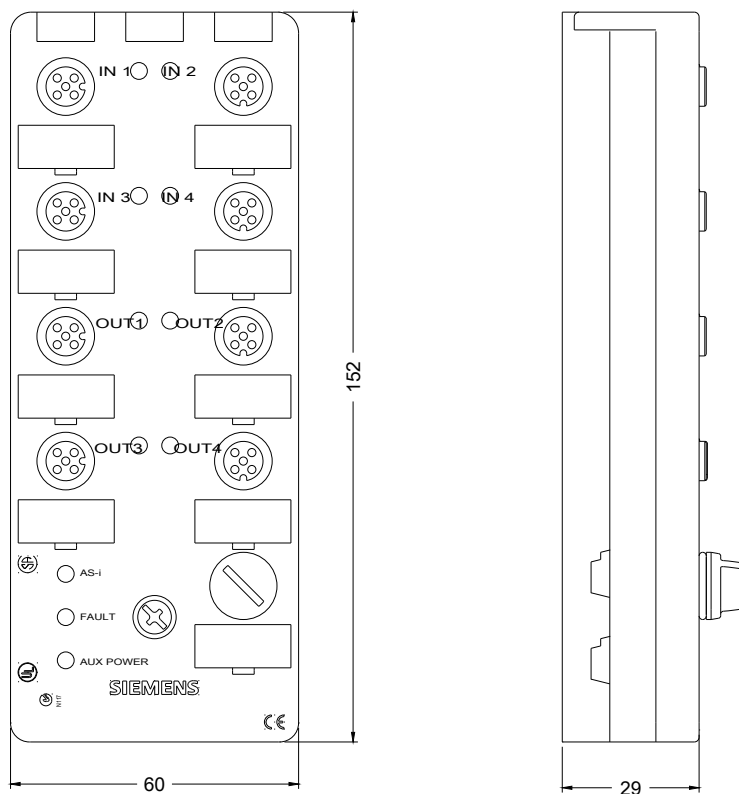

last modified:

10/07/2016