


AS-i compact module K45 digital A/B slave, 4 DI, IP67 2 x 2 inputs, maximum 200 mA 2 x M12 sockets with Y assignment Mounting plate 3RK1901-2EA00 or 3RK1901-2DA00 is to be ordered separately

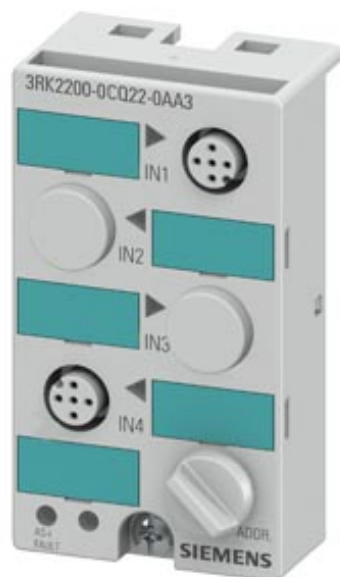

General technical data	
Design of the product	digital I/O modules for operation in the field, IP67 - K45
Type	2 x 2 inputs
Design of the slave type	A/B slave
I/O configuration	0
ID/ID2 code	A/0
Number I/O sockets	2
Type of electrical connection of the inputs and outputs	M12 screw-type terminals
AS interface total current input max	270 mA
operating voltage according to AS-Interface specification	26.5 ... 31.6 V
Ground terminal	Using PIN5 on the M12 sockets. Outgoing via flat tab sleeve (2.8 x 0.8 mm form A)
Addressing	front addressing socket
AS interface Connection Polarity reversal protection	built-in
Delivery note	the modules are delivered without mounting plate
Sensor supply	
Type of voltage supply for power supply	using AS-Interface

Input voltage	20 ... 30 V
Property of the sensor supply Short-circuit and overload resistant	Yes
Ampacity of the sensor supply for all inputs at ambient temperature 40 °C	200 mA

Inputs	
Number of digital inputs	4
Type of connection	2- and 3-wire technology
Input circuit	PNP transistor
Type of voltage of the input voltages	DC
Inputs switching level High min	10 V
Input current at digital input - for signal <1> minimum - with signal <0> maximum	6 mA 1.5 mA
Inputs sensor supply using AS-Interface	short-circuit and overload resistant
Inputs socket assignment - PIN 1 - PIN 2 - PIN 3 - PIN 4 - PIN 5	sensor supply L+ data input 2 sensor supply L- data input 1 ground terminal
Design of the pin assignment of the inputs	Y assignement

Outputs	
Number of digital outputs	0

Display	
Status display - display of I/Os - display of Uaux - display of AS-Interface/diagnostics	yellow LED not required green/red dual LED

Assignment of the data bits	
Assignment of data bits - socket - socket 2 - socket 3 - socket 4	PIN 4 = IN1 (D0), PIN 2 = IN2 (D1) not available not available PIN 4 = IN3 (D2), PIN 2 = IN4(D3)

Ambient conditions	
Ambient temperature - during operation - during storage	-25 ... +85 °C -40 ... +85 °C
Protection class IP	IP67

Mechanical data

Width	45 mm
Height	80 mm
Depth	30 mm
Mounting type	standard rail mounting/wall mounting using mounting plate for K45 compact module

Certificates/approvals

General Product Approval			EMC	Declaration of Conformity	
 CSA	 UL		 RCM	 EG-Konf.	Miscellaneous

Shipping Approval					other
 ABS	 BUREAU VERITAS	 LRS	 PRS	 RMRS	 ASi

other	
Confirmation	Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK2200-0CQ22-0AA3>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK2200-0CQ22-0AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK2200-0CQ22-0AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK2200-0CQ22-0AA3&lang=en

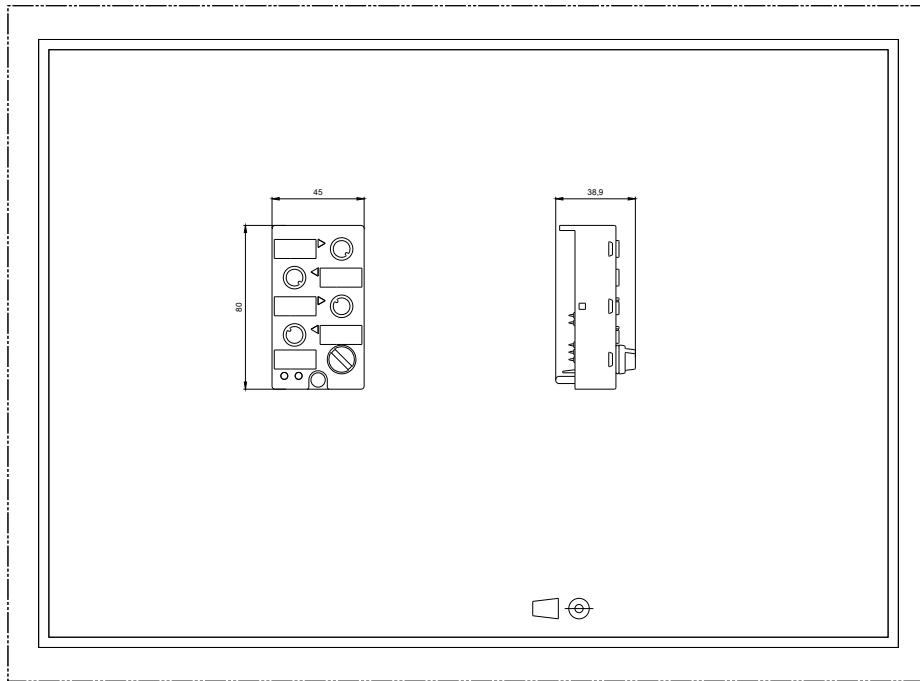

last modified:

07/26/2019