



circuit breaker 3VA6 UL frame 1200 breaking capacity class H 65kA @ 480 V 3-pole, line protection ETU360, LSIG, In=1000A overload protection Ir=400A - 1000A short circuit protection I_{sd}=1,5-10x I_n, I_i=1,5-12x I_n w/o connection

Model	
product brand name	SENTRON
product designation	Molded-case circuit breaker
product designation / according to UL file	HNAE
design of the product	System protection
design of the load switch / according to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type)	Yes
design of the overcurrent release	ETU360
protection function of the overcurrent release	LSIG
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	600 V
power loss [W] / maximum	169 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	169 W
mechanical service life (operating cycles) / typical	3 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	1 500
electrical endurance (operating cycles) / at AC-1 / at 690 V	500
electrical endurance (operating cycles) / at 480 V	1 500
electrical endurance (operating cycles) / at 600 V	500
product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof	No
ground-fault monitoring version	Summation current formation L + N-conductor
product function	
• communication function	No
• other measurement function	No
Net Weight	23.9 kg
Current	
marking / according to UL 489 / 100%-rated breaker	No
operational current	
• at 40 °C	1 000 A
• at 45 °C	1 000 A
• at 50 °C	1 000 A
• at 55 °C	1 000 A
• at 60 °C	1 000 A
• at 65 °C	1 000 A
• at 70 °C	1 000 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	H
maximum short-circuit current breaking capacity (I _{cu})	

• at 240 V • at 415 V • at 690 V	110 kA 70 kA 30 kA
operating short-circuit current breaking capacity (Ics) • at 240 V • at 415 V • at 690 V	55 kA 35 kA 15 kA
short-circuit current making capacity (Icm) • at 240 V • at 415 V • at 690 V	242 kA 154 kA 63 kA
Switching capacity according to UL 489	
current breaking capacity • at 240 V • at 480 V • at 600 V	100 kA 65 kA 35 kA
Adjustable parameters	
adjustable response value setting current (I _r) / of the L-trip / with I _{2t} characteristic • minimum • maximum	400 A 1 000 A
adjustable response value delay time (t _r) / for L-tripping / with I _{2t} characteristic • minimum • maximum	10 s 20 s
adjustable response value setting current (I _{sd}) / of S-trip / with I _{2t} characteristic • minimum • maximum	1 500 A 10 000 A
adjustable response value delay time (t _{sd}) / for S-tripping / with I _{2t} characteristic • maximum	0.4 s
adjustable response value setting current (I _i) / for I-tripping • minimum • maximum	12 000 A 12 000 A
adjustable current response value current / for G-tripping / with standard characteristic • initial value • full-scale value	200 A 1 000 A
adjustable response value delay time (t _g) / for G-tripping / with I _{0t} characteristic • minimum • maximum	0.1 s 0.3 s
adjustable current response value current / of instantaneous short-circuit trip unit • minimum • maximum	12 000 A 12 000 A
design of the N-conductor protection	adjustable OFF; 50%; 75%; 100%; 125%; 150%
product function / grounding protection	Yes
Mechanical Design	
product component • undervoltage release • trip indicator	No No
height [in]	8.14 in
height	206.9 mm
width [in]	8.99 in
width	228.4 mm
depth [in]	16 in
depth	406.4 mm
Connections	
type of electrical connection / for main current circuit	without terminals
design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	silver

design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	silver
Auxiliary circuit	
number of CO contacts / for auxiliary contacts	0
Environmental conditions	
protection class IP / on the front	IP40
ambient temperature	
• during operation / minimum	-25 °C
• during operation / maximum	70 °C
• during storage / minimum	-40 °C
• during storage / maximum	80 °C
Certificates	
reference code / according to IEC 81346-2	F
certificate of suitability / as approval for NAVAL (no combat vessels) / supplement SB	No
General Product Approval	



[Confirmation](#)



[Miscellaneous](#)



Declaration of Conformity	Test Certificates	other		
		Type Test Certificates/Test Report	Miscellaneous	Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA6710-6HQ31-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA6710-6HQ31-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA6710-6HQ31-0AA0


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

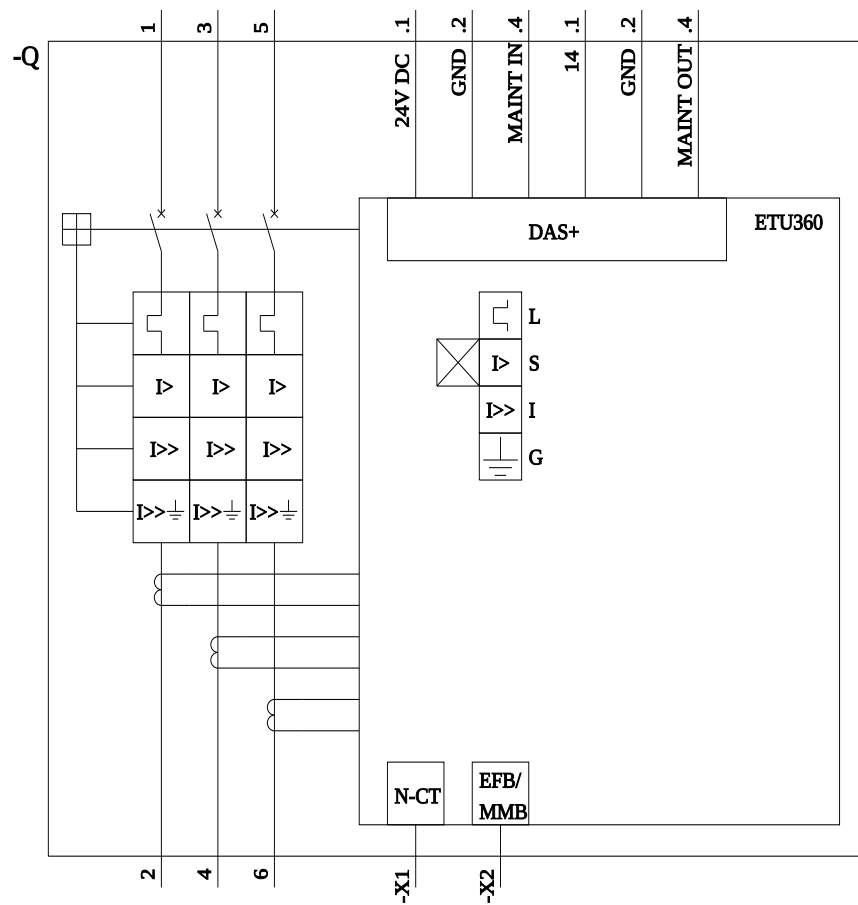

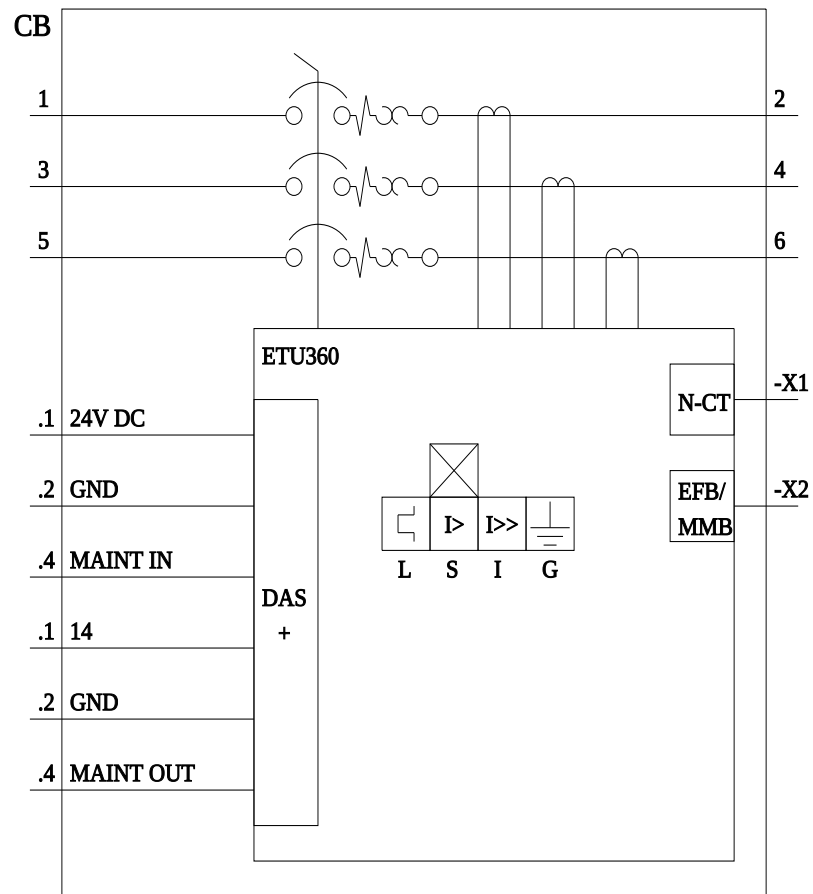

last modified:

4/19/2023

