


Trailing cable for PROFIBUS 2-core, shielded max. travel velocity: 80 m/min max. acceleration: 4 m/QS min. Bending radius: approx. 65 mm min. 5 million bending cycles; sold by the meter, Delivery length max. 1000 m Minimum order 20 m

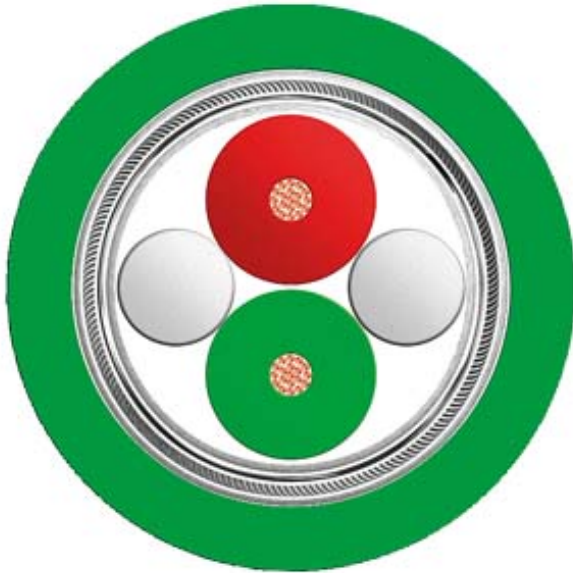

Product description

This product has reached the end of its life-cycle. It is therefore discontinued and no longer available. In case of questions concerning a successor product please contact your Siemens sales partner.