

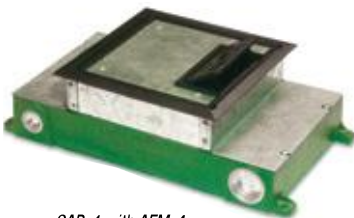


Access Floor Modules

Concrete Inserts

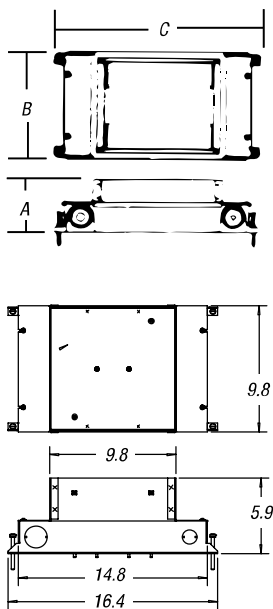

GAB-4 with AFM-4

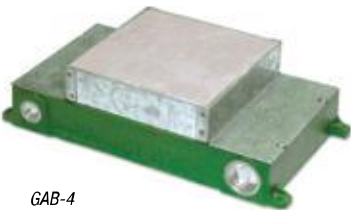

GAB-4



GAB-8-S



GAB-8-S with AFM-8



CAT. NO.	DIMENSIONS (IN.)			MAXIMUM CAPACITY (CU. IN.)	STANDARD CONDUIT TAPPING	MAXIMUM CONDUIT TAPPING	AFM INSERT	STD. CTN.
	A	B	C					
GAB-4	4 1/4	9	16	150	2-3/4" 2-1 1/4"	1 1/2"	AFM-4	1
GAB-6	4 1/4	9	16	225	2-3/4" 2-1 1/4"	1 1/2"	AFM-6	1
GAB-8-S	5 5/8	9 3/4	16 3/4	325	2-3/4" 2-1 1/4"	—	AFM-8	1

*Required for installation in concrete pours only.
For use with the AFM insert. The GAB cast Pre-Set includes center collar and styrene insert to prevent concrete ingress. Standard conduit hubs are 3/4" and 1 1/4".
Specify either -4 or -6.

Boxes & Covers — Steel City® Floor Boxes