

Pipe Straps, Conduit Clamps and Hangers


CT-720 — Copper Riser Clamp

Normally used for the support of uninsulated vertical tubing where no movement will occur. Please use C-720 for carbon steel piping or C-720P for plastic coating requirements.

Note: This product is not designed to be supported with rods. Install using the maximum suggested torque values shown in the Technical Section of this catalog.

Specifications

- Material: Carbon Steel
- Finish: Copper
- Compliance: Federal Specification A-A-1192A Type 8, MSS-SP-69 Type 8
- Ordering: Specify tubing size and catalog number

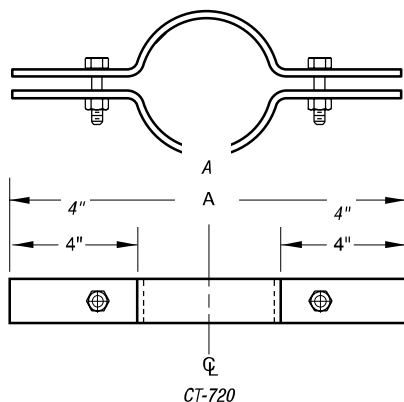

CAT. NO.	TUBE SIZE (IN.)	MAX. LOAD (LBS.)	A (IN.)	WT. EACH (LBS.)
CT-720-1/2	1/2	220	9 3/16	.70
CT-720-3/4	3/4	220	9 9/16	.74
CT720 1	1	220	9 1/2	.75
CT-720-1-1/4	1 1/4	220	9 3/4	.77
CT-720-1-1/2	1 1/2	220	10 1/8	.80
CT-720-2	2	220	10 1/2	.84
CT-720-2-1/2	2 1/2	390	11	1.60
CT-720-3	3	530	11 5/8	1.80
CT-720-3-1/2	3 1/2	530	12 5/8	1.95
CT-720-4	4	530	13 3/8	2.04
CT-720-5	5	810	14	3.50
CT-720-6	6	1,570	15	5.25


Standard Finish — GoldGalv®, unless otherwise stated.

C-724 — Ductile Iron Pipe Clamp

Can be used to secure mechanical joint piping or socket fittings together to prevent separation under pressure either under or above ground, vertically or horizontally. If using in this fashion, two (2) W-724 Socket Clamp Washers and Figure 133 Rods are also required, but must be ordered separately. The C-724 may also be used to support and guide vertical ductile iron pipe.

Specifications

- Materials: Carbon Steel
- Ordering: Specify pipe size, catalog number and finish
- Finish: Standard Finish — GoldGalv®, Black (add suffix "-B"), Electro-Galvanized (add suffix "-EG")

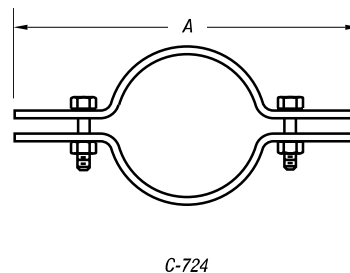

CAT. NO.	PIPE SIZE (IN.)	ACTUAL PIPE O.D.	A (IN.)	WASHER SIZE (IN.)	WT. EACH (LBS.)
C-724-3	3	3.96	12 1/4	3/4	9.00
C-724-4	4	4.8	13 3/4	3/4	9.00
C-724-6	6	6.9	15 3/4	3/4	10.70
C-724-8	8	9.05	18	3/4	12.20
C-724-10	10	11.1	20 3/4	3/4	14.60
C-724-12	12	13.2	22 3/4	3/4	16.60
C-724-14	14	15.3	25 1/2	1 1/4	41.90
C-724-16	16	17.4	28	1 1/4	61.90
C-724-18	18	19.5	33	1 1/4	65.10
C-724-20	20	21.6	35 1/2	1 1/2	92.20
C-724-24	24	25.8	40 1/2	1 1/2	122.70
C-724-30	30	32	48	1 1/2	184.00

Standard Finish — GoldGalv®, unless otherwise stated.