

Metal Clad Cable, Armored Cable and Flexible Metal Conduit Fittings

Armor-gripping saddle stays open by itself when cable is being inserted!

Two-Screw Connectors


- Formed steel body
- Carefully round bushing

CAT. NO.	CABLE OPENING (IN.)		TRADE SIZE	K.O. SIZE	DIMENSIONS (IN.)		
	MAX.	MIN.			A	B	C
3301-TB**	.656	.250	3/8"	1/2"	3/2	1 1/8	1 1/8
3312-TB	.937	.500	1/2"	1/2"	1 1/2	1 1/8	1 1/8

** UL Listed for armored cable only.


UL File No. E 1383

CSA File No. 2884



TITE-BITE® design holds flexible metal cable firmly in place with a single screw!

Adapter — EMT to Flex

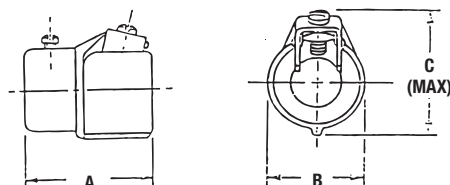

CAT. NO.	SIZE FLEX TO EMT	DIMENSIONS (IN.)		
		A	B	C
503TB	1/2" - 1/2"	1 21/2	1 1/8	1 1/8
504	3/4" - 3/4"	1 5/2	1 1/8	2 1/8
505-TB	1" - 1"	2 1/2	2 1/8	2 1/8


CSA File No. 8994

UL File No. E-23018

For flexible metal conduit and armored cable.

Duplex Clamp Connector

- Malleable iron construction



CAT. NO.	K.O. SIZE	DIMENSIONS (IN.)	
		A	B
291-TB	1/2"	1 1/2"	1 1/8"

UL File No. E 1383

CSA File No. 2884

One-piece fitting couples 3/8" flexible metal conduit to 1/2" EMT!

Combination Coupling




CAT. NO.	SIZE FLEX TO EMT	DIMENSIONS (IN.)		
		A	B	C
449-TB	3/8" - 1/2"	1 21/2	1 1/2	1 5/16

Cable opening: max. .656, min. .250.

UL File No. E-23018

CSA File No. 2884



Smooth plastic bushing protects conductor insulation from rough edges of armored cable and flexible metal conduit!

Anti-Short Bushing



CAT. NO.	SIZE
390	14-2, 14-3, 12-2
391	14-4, 12-3, 6-1, and 4-1
392	12-4, 10-2, 10-3 and 2-1
393	10-4, 8-2, 8-3, and 1-1
394	8-4, 6-2, 6-3, 4-2, 4-3, and 6-4

Colorized.

CSA File No. 589

Temperature Rating: 240° F.

UL not applicable.

Fast and easy installation!

Strap

- Elongated bolt hole makes alignment easy, even when holes in mounting surface are off center
- Snap-on design holds strap in place



CAT. NO.	SIZE
65-TB	3/8" Flex