

For use with metal clad cable.

Clamp Type Connector – Die Cast Zinc

Cat. No.	Conduit Size	Dimensions (in.)			Std. Ctn.
		A (min.)	A (max.)	B	
XC-280	3/8" (1/2" KO)	0.18"	0.64"	1.16"	1000



U.L. File No. E-17909

CSA File No. LR-18130M57

Duplex Clamp Type Connector – Die Cast Zinc

Cat. No.	Conduit Size	Dimensions (in.)			Std. Ctn.
		A (min.)	A (max.)	B	
XC-210	3/8" (1/2" KO)	0.13"	0.65"	1.56"	250

CSA File No. LR-18130M57

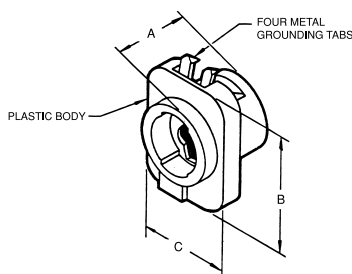


Cable Range

Cat. No.	Continuous Corrugated and Corrugated		Aluminum Smooth Extruded		Std. Ctn.
	min. dia.	max. dia.	min. dia.	max. dia.	
XC-280	—	.510"	.345"	.525"	1000
XC-210	—	—	.410"	.500"	250

Snap-In Connector for Flexible Metal Conduit – 105°C Rated

Cat. No.	Conduit Size	K.O. Size	Unit Qty.	Std. Ctn.
100-TB	3/8"	1/2"	50	500
100BP	3/8"	1/2"	250	1000

- No locknut required.
- No special tools required.
- High impact thermoplastic with steel insert.



- Packed in polybags.
- Available bulk packed-10,000 per carton.
- Plastic.

BX Flex Bushings – Anti-Short

Cat. No.	Fits Standard Cable Range	Size	Unit Qty.	Std. Ctn.
IT-100-SC	14/2-14/3-12/2	0	100	100
IT-101	14/4-12/3-6/1-4/1	1	100	35
IT-102	12/4-10/2-10/3-2/1	2	50	50
IT-103	10/4-8/2-8/3-1/1	3	50	50
IT-104	8/4-6/2-6/3-4/2-4/3-6/4	4	50	50

For die cast armored cable/flexible metallic conduit fittings and combination fittings refer to the Steel City® Die Cast Conduit Fittings section.

Ordered by Bags