



Hazardous Location Fittings-PVC Coated

T&B Catalog Number:

UPC Number: UNY405-G
 Status: 70450841405
 Description: Active

1 1/4 in. Dark Gray PVC Coated UNY Male Union, Steel-electrogalvanized, 3 piece. For hazardous and non-hazardous locations.

Features

Coated with a nominal .002 in. (2 mil) blue urethane on the interior, before PVC Coating is applied.

A minimum .040 in. (40 mil) PVC Coating is bonded to the exterior.

Pressure sealing sleeves to protect the connection.

Application

To connect conduit to a conduit fitting, junction box, or device enclosure.

General

Custom_Finish uny_114
 Trade Size (inches) 1 1/4
 Material Steel
 Color Dark Gray

Dimension Information

Overall Length (inches) 3 1/16
 Overall Diameter (inches) 2 3/4

Technical Information

Chemical Resistance Chart Available on Website

Specifications


Ocal Specification Guide-1995 Master Format-PDF Available on Website
 Ocal Specification Guide-1995 Master Format-DOC Available on Website
 Ocal Specification Guide-2004 Master Format-PDF Available on Website
 Ocal Specification Guide-2004 Master Format-DOC Available on Website

Packaging

Package in Units 10
 T&B Sold in UOM Each
 T&B Weight Per UOM 2.6 lbs. Each

Application Support

Ocal PVC Coated Conduit System Available on Website
 Ocal Specifications Available on Website
 Recommended Installation Procedures Available on Website
 NEMA Standards-RN 1 Available on Website
 Available on Website

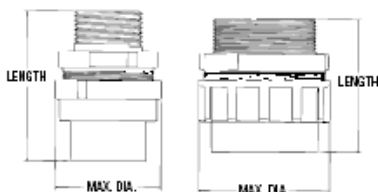

NEC 310-16 - Conductors for General
Wiring

NEC Table 8

Available on Website

Notes

Dimensional values are of uncoated fittings.

Standard color is dark gray. Also available in white and light blue. Custom colors are also available upon request. Please contact Technical Services, 888-862-3289.

Certifications

RoHS Compliance

Yes

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email: techsupport@tnb.com