


Straight



Features

- Available in sizes 3/8" through 1" conduit and tubing.
- All nylon construction resists salt water, weak acids, gasoline, alcohol, oil, grease and common solvents.
- No disassembly required.
- No threading of the conduit or tubing required to install.
- Complete Conduit/connector system is reusable.
- Suitable for indoor/outdoor use.
- Lower installed cost.
- Black connectors provided with nylon locknut.
- Gray connectors provided with assembled O-ring and metal locknuts.
- Protection class IP 68 per DIN 40050 up to 70 psi (5 bar) water pressure.
- Molded of type 6/6 nylon. ASTM D-4066-PA 111; flammability classification 94V-2.

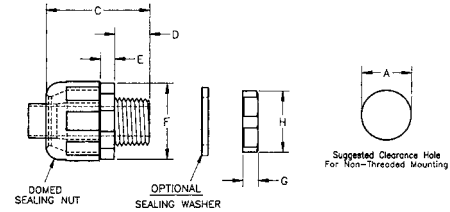

Specifications

Size	Part No. Black	Part No. Gray*	Description	Body & Sealing Unit					Locking Nut		Std. Ctn. Qty.
				A	C	D	E	F	G	H	
				Clearance Hole in. (mm)	Max O.A. Length in. (mm)	Thread Length in. (mm)	Wrenching Nut Thickness in. (mm)	Wrenching Flats in. (mm)	Thickness in. (mm)	Wrenching Flats in. (mm)	
3/8"	LT38	LT38G	Straight L/T Fitting	.875 (22.2)	2.000 (50.8)	.625 (15.9)	.250 (6.3)	1.328 (33.7)	.266 (6.7)	1.062 (26.9)	50
1/2"	LT50	LT50G	Straight L/T Fitting	.875 (22.2)	2.000 (50.8)	.625 (15.9)	.250 (6.3)	1.328 (33.7)	.266 (6.7)	1.062 (26.9)	50
3/4"	LT75	LT75G	Straight L/T Fitting	1.109 (28.2)	2.031 (51.6)	.625 (15.9)	.250 (6.3)	1.562 (39.7)	.266 (6.7)	1.312 (33.3)	25
1"	LT100	LT100G	Straight L/T Fitting	1.375 (34.9)	2.250 (57.1)	.781 (19.8)	.250 (6.3)	1.875 (47.6)	.266 (6.7)	1.625 (41.3)	20


*Gray connectors provided with assembled o-ring and metal locknuts. Black connectors provided with nylon locknuts only.

90°



Features

- Available in sizes 3/8" through 1" conduit and tubing.
- Smooth internal surfaces for easier wire installation around corner angles.
- All nylon construction resists salt water, weak acids, gasoline, alcohol, oil, grease and common solvents.
- No disassembly required.
- No threading of the conduit or tubing required to install.
- Complete conduit/connector system is reusable.
- Use of a sealing washer may be required for wet locations.
- Suitable for indoor/outdoor use.
- Lower installed cost.
- Black connectors provided with nylon locknut, packed separately.
- Gray connectors provided with assembled O-ring and metal locknuts.
- Protection class IP 68 per DIN 40050 up to 70 psi (5 bar) water pressure.
- Molded of type 6/6 nylon. ASTM D-4066-PA 111; flammability classification 94V-2.

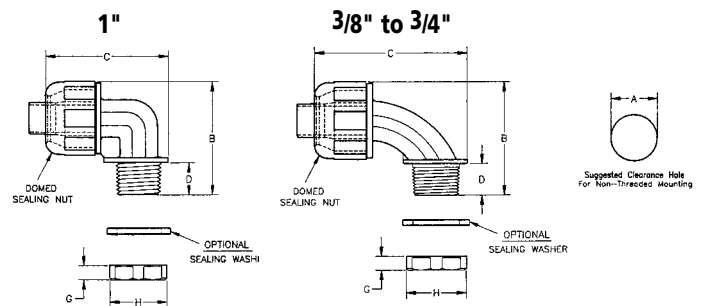

Specifications

Size	Part No. Black	Part No. Gray	Description	Body & Sealing Unit				Locking Nut		Std. Carton Qty.
				A	B	C	D	G	H	
				Clearance Hole in. (mm)	Max O.A. Height in. (mm)	Max O.A. Length in. (mm)	Thread Length in. (mm)	Thickness in. (mm)	Wrenching Flats in. (mm)	
3/8"	LT938	LT938G	90 degree L/T Fitting	.875 (22.2)	1.98 (50.3)	2.91 (73.9)	.52 (13.2)	.27 (6.8)	1.06 (26.9)	25
1/2"	LT950	LT950G	90 degree L/T Fitting	.875 (22.2)	1.98 (50.3)	2.91 (73.9)	.52 (13.2)	.27 (6.8)	1.06 (26.9)	25
3/4"	LT975	LT975G	90 degree L/T Fitting	1.109 (28.2)	2.29 (58.2)	3.17 (80.5)	.52 (13.2)	.27 (6.8)	1.31 (33.3)	20
1"	LT9100	LT9100G	90 degree L/T Fitting	1.375 (34.9)	2.84 (72.1)	3.18 (80.8)	.78 (19.8)	.27 (6.8)	1.61 (40.9)	10