


Conduit and Cable Supports

Conduit Clips

- Available for 3/8" through 2" trade sizes for EMT, flexible conduit and MC/AC cable
- Available with either a plain hole for 1/4" bolt or a 1/4-20 thread impression
- Shape of clip and clasp mechanism enables hand installation (no tools needed)
- Unique clasp design has an aggressively angled tab and receiving hole to provide consistent, easy clasping of the clip
- Supports 100 lbs. static load limit in the vertical position. Supports 25 lbs. static load limit in the horizontal position
- Unique finger grips on the ends of the clip provide easy grip for hand installation, or easy plier grip when using pliers to install

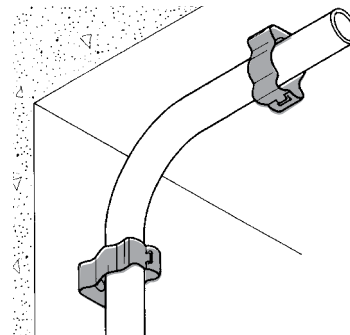

CAT. NO.	FIG. NO.	CONDUIT SIZE	MOUNTING HOLE	STD. CTN.
SSF-CC3/8	1	14-2 through 12-3 MC/AC cable & 3/8" conduits	3/32" plain	100
SSF-CC1/2 3/4	1	1/2"-3/4"	3/32" plain	100
SSF-CC1	1	1"	3/32" plain	100
SSF-CC1 1/4	1	1 1/4"	3/32" plain	100
SSF-CC1 1/2	1	1 1/2"	3/32" plain	100
SSF-CC2	1	2"	3/32" plain	100
SSF-CC3/8T	1	14-2 through 12-3 MC/AC cable & 3/8" MC/AC conduits	1/4-20 thread impression	100
SSF-CC1/2 3/4T	1	1/2"-3/4"	1/4-20 thread impression	100
SSF-CC1T	1	1"	1/4-20 thread impression	100
SSF-CC1 1/4T	1	1 1/4"	1/4-20 thread impression	100
SSF-CC1 1/2T	1	1 1/2"	1/4-20 thread impression	100
SSF-CC2T	1	2"	1/4-20 thread impression	100




Fig. 1

- Available for 1/2" through 1" EMT and rigid conduit
- Available with either a plain hole for 1/4" bolt or a 1/4-20 thread impression
- Supports ultimate static load limit of 25 lbs. in the vertical position.
- Supports ultimate static load limit of 15 lbs. in the horizontal position

CAT. NO.	FIG. NO.	CONDUIT SIZE (IN.)	MOUNTING HOLE	STD. CTN.
SSF-CS1/2	1	1/2"	3/32" plain	100
SSF-CS3/4	1	3/4"	3/32" plain	100
SSF-CS1	1	1"	3/32" plain	100
SSF-CS1/2T	1	1/2"	1/4-20 thread impression	100
SSF-CS3/4T	1	3/4"	1/4-20 thread impression	100
SSF-CS1T	1	1"	1/4-20 thread impression	100




Fig. 1