

Conduit and Cable Supports

Conduit Hangers from Flange, Wire or Rod

- CK Series attaches conduit (EMT, Rigid, ENT and Aluminum) to drop wire, rods or flanges
- Application A (vertical flange) supports 25 lbs. static load limit
- Application B (horizontal flange) supports 100 lbs. static load limit
- Application C (vertical drop wire) supports 50 lbs. static load limit

CAT. NO.	FIG. NO.	DESCRIPTION	STD. CTN.
SSF-CK1/2	1	Conduit hangers for flange, wire or rod	100
SSF-CK3/4	1	Conduit hangers for flange, wire or rod	100
SSF-CK1	2	Conduit hangers for flange, wire or rod	100

Wire/Rod

CONDUIT SIZE	#10 & #12 WIRE	#8 & #9 WIRE	3/16" PLAIN ROD	1/4" PLAIN & THREADED ROD	3/8" PLAIN & THREADED ROD
1/2 EMT	CK1/2	CK1/2	CK1/2	CK1/2	CK3/4
1/2 Rigid	CK1/2	CK1/2	CK1/2	CK3/4	CK3/4
3/4 EMT	CK3/4	CK3/4	CK3/4	CK3/4	CK1
3/4 Rigid	CK3/4	CK3/4	CK3/4	CK1	CK1
1 EMT	—	CK1	CK1	CK1	CK1
1 Rigid	—	CK1	CK1	CK1	—

Flange

CONDUIT SIZE	1/8" FLANGE	3/16"-1/4" FLANGE	5/16"-3/8" FLANGE	7/16"-1/2" FLANGE
1/2 EMT	CK1/2	CK1/2	CK3/4	CK3/4
1/2 Rigid	CK1/2	CK3/4	CK3/4	CK1
3/4 EMT	CK3/4	CK3/4	CK1	CK1
3/4 Rigid	CK3/4	CK1	CK1	CK1
1 EMT	CK1	CK1	CK1	CK1
1 Rigid	CK1	CK1	—	—


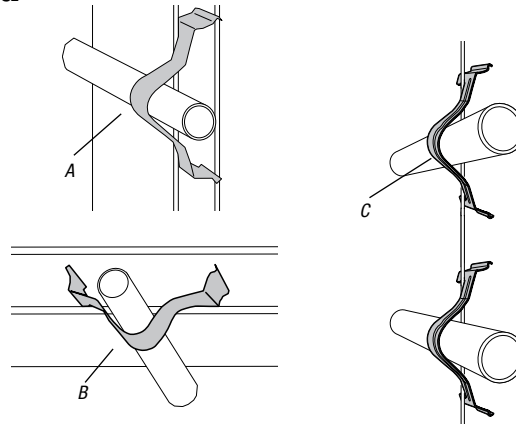


Fig. 1




Fig. 2

Flexible Conduit Hangers from Drop Wire

- One-piece construction
- Can be used in vertical or horizontal positions
- Fits 14-2 through 12-3 armored cable (.433"–.535" outer diameter)
- No load rating — for positioning only
- No installation tools required

CAT. NO.	FIG. NO.	DESCRIPTION	STD. CTN.
SSF-CK535	1	Flexible conduit hanger from drop wire, #8–#12 wire, .433"–.535" O.D. cable	100



Fig. 1

