

Fastener Accessories and Hardware

Signal Reference Grid Wire Clamp

- Supports signal reference grid wires below computer-room floors
- One fastener supports wire sizes #8 stranded (.146") to #4 stranded (.232")
- Fits post sizes 3/4" to 1" round or square
- Slots in fastener grip wire provides positive contact with post
- Clamps grid wire directly to post, enabling a low-resistance connection across bare metal contacts
- Installs easily with a screw driver or nut driver

CAT. NO.	FIG. NO.	DESCRIPTION	STD. CTN.
3900	1	Signal reference grid wire clamp	100

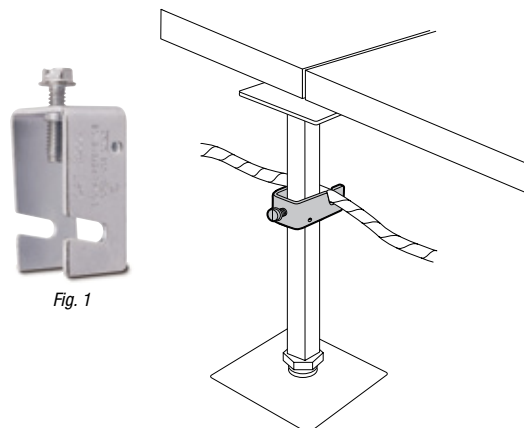


Fig. 1

Deck Hanger

- Easy method to hang items below decking
- Requires pre-drilled hole, 1/4" diameter
- Works for material thicknesses up to 1/8"

CAT. NO.	FIG. NO.	DESCRIPTION	STD. CTN.
SSF-MNH	1	Deck Hanger Clip	100

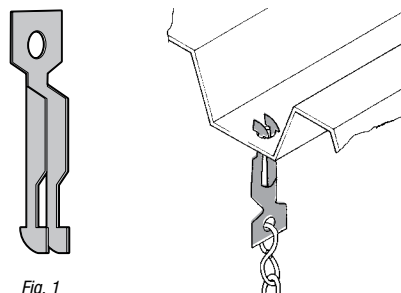


Fig. 1

Hardware Components

CAT. NO.	FIG. NO.	DESCRIPTION	STD. CTN.
E142-1/4X075EG	1	1/4-20 x 3/4" hex head bolt	50
E142-1/4X100EG	1	1/4-20 x 1" hex head bolt	50
E142-1/4X150EG	1	1/4-20 x 1 1/2" hex head bolt	50
E145-1/4EG	2	1/4-20 x 1/4" hex nut	100
SSF-MH1/4-3/8	3	1/4-20 x 3/8" bolt combo head	100



Fig. 1



Fig. 2



Fig. 3

R-Series Continuous Thread Rod — Galvanized

DATA FOR PRESSURE PIPING						
CAT. NO.	ROD SIZE	ULTIMATE [†] LOAD IN LBS.	ROOT AREA THREAD	NOMINAL PIPE SIZE	MAX. SAFE LOAD AT 450°	STD. CTN.
R628-6 FT.	¼-20	900	.027	—	—	300
R638-6 FT.	⅜-16	1,900	.068	¾"-2"	610	150
R648-6 FT.	½-13	3,500	.126	2½"-3½"	1,130	60
R1028-10 FT.	¼-20	900	.027	—	—	500
R1038-10 FT.	⅜-16	1,900	.068	¾"-2"	610	250
R1048-10 FT.	½-13	3,500	.126	2½"-3½"	1,130	100

[†] Load Ratings based on safety factor of three.

