


## Conduit, Cable and Pipe Supports

### Angler® Pipe and Conduit Clamp

For EMT, IMC, Rigid and Standard Pipe.

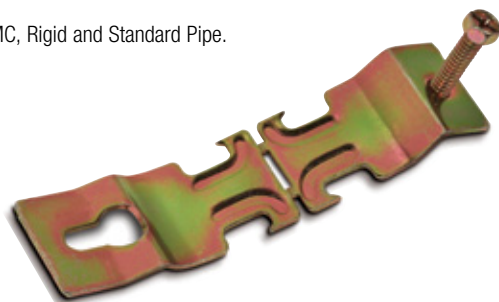

#### Universal Series



| CAT. NO.                  | SIZE (IN.) | STRAP THICKNESS | DESIGN LOAD (LBS.) | INSTALL TORQUE (IN. LBS.) | STD. CTN. |
|---------------------------|------------|-----------------|--------------------|---------------------------|-----------|
| <b>Galv-Krom® Finish</b>  |            |                 |                    |                           |           |
| C 109 1/2                 | 1/2        | 14 ga.          | 400                | 40                        | 100       |
| C 109 3/4                 | 3/4        | 14 ga.          | 500                | 40                        | 100       |
| C 109 1                   | 1          | 14 ga.          | 500                | 40                        | 100       |
| C 109 1 1/4               | 1 1/4      | 14 ga.          | 500                | 40                        | 100       |
| C 109 1 1/2               | 1 1/2      | 12 ga.          | 800                | 60                        | 50        |
| C 109 2                   | 2          | 12 ga.          | 800                | 60                        | 50        |
| C 109 2 1/2               | 2 1/2      | 12 ga.          | 800                | 60                        | 50        |
| C 109 3                   | 3          | 12 ga.          | 800                | 60                        | 50        |
| C 109 3 1/2               | 3 1/2      | 11 ga.          | 1,200              | 60                        | 25        |
| C 109 4                   | 4          | 11 ga.          | 1,200              | 60                        | 25        |
| <b>SilverGalv® Finish</b> |            |                 |                    |                           |           |
| C 109 1/2 EG              | 1/2        | 14 ga.          | 400                | 40                        | 100       |
| C 109 3/4 EG              | 3/4        | 14 ga.          | 500                | 40                        | 100       |
| C 109 1 EG                | 1          | 14 ga.          | 500                | 40                        | 100       |
| C 109 1 1/4 EG            | 1 1/4      | 14 ga.          | 500                | 40                        | 100       |
| C 109 1 1/2 EG            | 1 1/2      | 12 ga.          | 800                | 60                        | 50        |
| C 109 2 EG                | 2          | 12 ga.          | 800                | 60                        | 50        |
| C 109 2 1/2 EG            | 2 1/2      | 12 ga.          | 800                | 60                        | 50        |
| C 109 3 EG                | 3          | 12 ga.          | 800                | 60                        | 50        |
| C 109 3 1/2 EG            | 3 1/2      | 11 ga.          | 1,200              | 60                        | 25        |
| C 109 4 EG                | 4          | 11 ga.          | 1,200              | 60                        | 25        |

#### Rigid Series

| CAT. NO.                  | SIZE (IN.) | STRAP THICKNESS | DESIGN LOAD (LBS.) | INSTALL TORQUE (IN. LBS.) | STD. CTN. |
|---------------------------|------------|-----------------|--------------------|---------------------------|-----------|
| <b>Galv-Krom® Finish</b>  |            |                 |                    |                           |           |
| C 109R 1/2                | 1/2        | 14 ga.          | 600                | 40                        | 100       |
| C 109R 3/4                | 3/4        | 14 ga.          | 600                | 40                        | 100       |
| C 109R 1                  | 1          | 14 ga.          | 600                | 40                        | 100       |
| C 109R 1 1/4              | 1 1/4      | 14 ga.          | 600                | 40                        | 100       |
| C 109R 1 1/2              | 1 1/2      | 12 ga.          | 800                | 60                        | 50        |
| C 109R 2                  | 2          | 12 ga.          | 800                | 60                        | 50        |
| C 109R 2 1/2              | 2 1/2      | 12 ga.          | 800                | 60                        | 50        |
| C 109R 3                  | 3          | 12 ga.          | 800                | 60                        | 50        |
| C 109R 3 1/2              | 3 1/2      | 11 ga.          | 1,200              | 60                        | 25        |
| C 109R 4                  | 4          | 11 ga.          | 1,200              | 60                        | 25        |
| <b>SilverGalv® Finish</b> |            |                 |                    |                           |           |
| C 109R 1/2 EG             | 1/2        | 14 ga.          | 600                | 40                        | 100       |
| C 109R 3/4 EG             | 3/4        | 14 ga.          | 600                | 40                        | 100       |
| C 109R 1 EG               | 1          | 14 ga.          | 600                | 40                        | 100       |
| C 109R 1 1/4 EG           | 1 1/4      | 14 ga.          | 600                | 40                        | 100       |
| C 109R 1 1/2 EG           | 1 1/2      | 12 ga.          | 800                | 60                        | 50        |
| C 109R 2 EG               | 2          | 12 ga.          | 800                | 60                        | 50        |
| C 109R 2 1/2 EG           | 2 1/2      | 12 ga.          | 800                | 60                        | 50        |
| C 109R 3 EG               | 3          | 12 ga.          | 800                | 60                        | 50        |
| C 109R 3 1/2 EG           | 3 1/2      | 11 ga.          | 1,200              | 60                        | 25        |
| C 109R 4 EG               | 4          | 11 ga.          | 1,200              | 60                        | 25        |


Hex head size 3/8" for 1/2" to 1 1/4" sizes, 1/2" for 1 1/2" to 4" sizes.

Material: Stamped Steel.

Pipe sizes 2 1/2" to 4" utilize the same clamps for the Rigid Series and the Universal Series.

Available in SilverGalv® Finish by adding "EG" suffix to catalog number.

### C-200 Universal Pipe Straps



| CAT. NO.    | EMT, IMC, RIGID PIPE SIZE (IN.) | PIPE O.D. RANGE (IN.) | STRAP THICKNESS | WT. LBS./C |
|-------------|---------------------------------|-----------------------|-----------------|------------|
| C-200-1/2   | 1/2                             | .706–.804             | 14 ga.          | 12         |
| C-200-3/4   | 3/4                             | .922–1.060            | 14 ga.          | 13         |
| C-200-1     | 1                               | 1.163–1.315           | 14 ga.          | 14         |
| C-200-1-1/4 | 1 1/4                           | 1.508–1.660           | 14 ga.          | 16         |
| C-200-1-1/2 | 1 1/2                           | 1.738–1.900           | 12 ga.          | 27         |
| C-200-2     | 2                               | 2.196–2.375           | 12 ga.          | 31         |

Design load equal to C-105 straps.