


Service Entrance Cable Fittings

Service Entrance Cable Connector

(Type SE/Type Use)

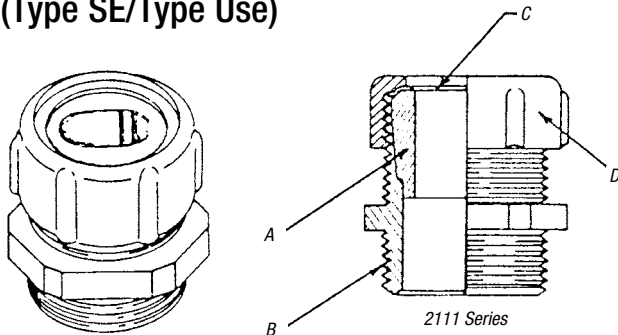

Application

- To connect service entrance cables to a meter box or an enclosure

Standard Material/Finish

Body	Zinc Die Cast/As Cast
Gland	Steel/Electro Zinc Plated & Chromate Coated
Retaining Ring	Stainless Steel/Passivated
Bushing	Neoprene/As Molded

Range

Oval (Flat) Cable Size	260 x .500 thru 1.062 x 1.765
Type USE Cable Size	(3) #12 thru (3) 4/0 AWG Conductors
Hub Size	1/2" thru 2" NPT (taper pipe threads)


Features

- Neoprene bushing, resists oil and water; grips cable the full length of the bushing, providing adequate strain relief without damaging outer jacket (A)
- Taper threaded body (B)
- Stainless steel retaining ring protects cable jacket against abrasion; reduces installing torque effort (C)
- Rugged ribbed steel gland construction (D)
- Suitable for Type SE & USE Service Entrance Cable

Listings/Compliances

UL (UL File No. E15170)
CSA (LR589, LR4484)
UL514, NEMA FB1, Federal Standard
H-28 (Threads), NFPA70

Underground Feeder Cable Connectors

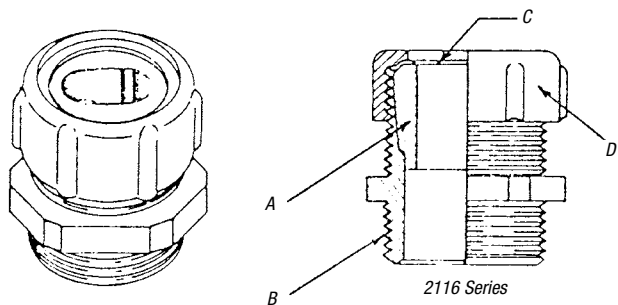

Application

- To connect underground feeder cables to a box or an enclosure

Standard Material/Finish

Body	Zinc Die Cast/As Cast
Gland	Steel/Electro Zinc Plated & Chromate Coated
Retaining Ring	Stainless Steel/Passivated
Bushing	Neoprene/As Molded

Range

Oval (Flat) Cable Size	235 x .500 thru .260 x .740
Hub Size	1/2" thru 1" NPT (tapered pipe threads)

Features

- Neoprene bushing resists oil and water; grips cable the full length of the bushing providing adequate strain relief without damaging outer jacket (A)
- Taper threaded body (B)
- Stainless steel retaining ring protects cable jacket against abrasion; reduces installing torque effort (C)
- Rugged ribbed steel gland construction (D)


Listings/Compliances

UL
CSA (LR2884)
UL514B, NEMA FB1, Federal Standard
H-28 (Threads), NFPA70

Service Entrance Cable Fittings

Oil- and water-resistant neoprene bushing specially designed for sealing around underground feeder cable!

Underground Liquiddtight Feeder-Cable Fittings

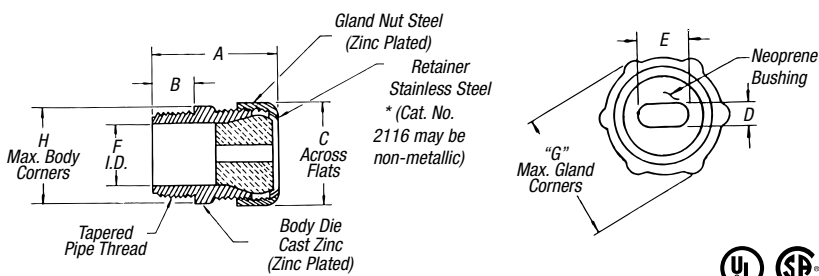



- Stainless steel retaining ring provides bearing surface for glandnut and eliminates cable twist
- Ribbed glandnut tightens easily with wrench to form high-strength connection

CAT. NO.	HUB SIZE	CABLE OPENING	DIMENSIONS (IN.)									
			A	B	C	D		E		F	G	H
						MIN.	MAX.	MIN.	MAX.			
2116-TB*	1/2"	.235 x .500	1 1/16	5/8	1	.060	.235	.350	.500	5/16	1 1/8	1 1/8
2237	3/4"	.230 x .430	1 1/16	5/8	1 1/32	.080	.230	.320	.430	13/16	1 1/8	1 1/8
2238	3/4"	.235 x .465	1 1/16	5/8	1 1/32	.050	.235	.340	.465	13/16	1 1/8	1 1/8
2239	3/4"	.240 x .685	1 1/16	5/8	1 1/32	.060	.240	.500	.685	13/16	1 1/8	1 1/8

* Not CSA Certified
UL File No. E-23017
CSA File No. 2884

Rocking action of foot allows each strap to accept a wide range of wire sizes!

Cable Straps

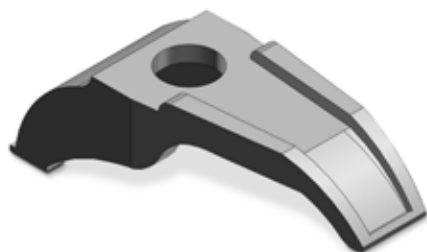

- Hole for 1/4" screw
- Hot-dipped galvanized malleable iron construction

CAT. NO.	WIRE SIZE	DIMENSIONS (IN.)	
		A	B
1341-TB	2-#10	5/8	1 1/8
1344	3-#6 or 3-#8	5/8	1 5/16
1345*	3-#4 or 3-#2	13/16	1 9/16
1346	3-1/0	3/4	2 1/16
1347	3-4/0	3/4	2 5/32

* Steel, hot-dipped galvanized.
UL not applicable
CSA Certified