


Non-Metallic Sheathed Cable Fittings

NM Clamp-Type Connector — Die-Cast Zinc




CAT. NO.	CONDUIT SIZE (IN.)	DIMENSIONS (IN.)			STD. CTN.
		A (MIN.)	A (MAX.)	B	
NC-201	½	.40	.95	1.87	250
NC-202	¾	.50	1.10	1.84	200
NC-203	1	.62	1.14	2.00	100
NC-204	1¼	.50	1.38	2.28	100
NC-205	1½	.75	1.61	2.49	50
NC-206	2	.90	2.04	3.35	50

CSA File No. LR-12798.

UL File No. E-17583.

Clamp-Type Connector — Die-Cast Zinc




CAT. NO.	CONDUIT SIZE (IN.)	DIMENSIONS (IN.)			STD. CTN.
		A (MIN.)	A (MAX.)	B	
NC301	¾ (½ KO)	.18	.64	1.16	1,000
NC-302	¾	.41	.82	1.87	500
NC-303	1	.34	.94	2.01	250

CSA File No. LR-12798.

UL File No. E-17583.

Clamp-Type Connectors Non-Watertight — Die-Cast Zinc




CAT. NO.	CONDUIT SIZE (IN.)	DIMENSIONS (IN.)			STD. CTN.
		A (MIN.)	A (MAX.)	B	
NC041	1¼	.27	.75	2.02	100
NC-051	1½	.54	.95	2.50	50
NC-061	2	.75	1.12	3.41	40

UL File No. E-15170 — 1¼"-1½".

UL File No. E-17583 — 2".

Duplex Clamp-Type Connector — Die-Cast Zinc


- For use with aluminum, smooth, extruded metal-clad cable. (min. dia. .410" — max. dia. .500").



CAT. NO.	CONDUIT SIZE (IN.)	DIMENSIONS (IN.)			STD. CTN.
		A (MIN.)	A (MAX.)	B	
XC-210	¾ (½ KO)	.13	.65	1.56	250
XC-211-SC	¾	.24	.63	1.59	200
XC-222-SC	¾	.24	.63	1.59	200


CONDUIT/CABLE	FMC (IN.)	AC	MCC	MCI
Max. Size	¾	10/2	.565	.565
Min. Size	¾	14/2	.425	.425

NM Flex Connectors Saddle-Type — Die-Cast Zinc



CAT. NO.	SIZE (IN.)	DIMENSIONS (IN.)			STD. CTN.
		A (MIN.)	A (MAX.)	B	
XC-2200-C	¾	.12	.63	.98	500

Tilt-In Connector — Electro-Galvanized Metallic Steel



CAT. NO.	SIZE (IN.)	DIMENSIONS (IN.)					STD. CTN.
		A	B	C	D	E	
NC-850	½	.050	.950	1.312	.650	8-32 x ¾	1,000
NC-851	¾-1	.050	1.250	1.750	.760	8-32 x 1	500
NC-852	1-¼	.062	1.625	2.125	.760	10-32 x 1	250
NC-853	1-½	.062	1.970	2.500	.785	10-32 x 12	100

Armored Cable/Flexible Metallic Conduit Fittings

90° Clamp-Type Connectors — Die-Cast Zinc

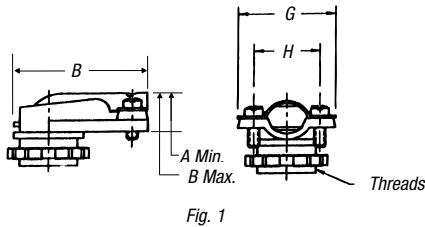


Fig. 1




Fig. 2

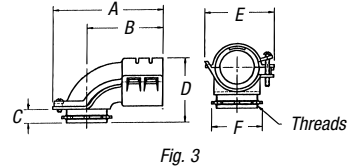


Fig. 3



XC-290




Fig. 4

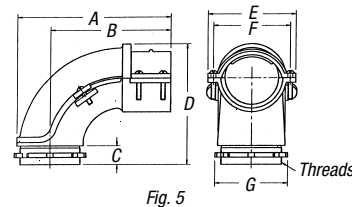


Fig. 5

Non-Insulated



CAT. NO.	FIG	SIZE (IN.)	DIMENSIONS (IN.)			STD. CTN.
			A (MIN.)	A (MAX.)	B	
XC-290	1	3/8 (1/2 KO)	.40	.63	1.80	500
XC-291	1	1/2	.65	1.00	2.08	250
XC-292	1	3/4	.83	1.25	2.27	100
XC-293	2	1	1.27	1.50	2.60	50
XC-294	2	1 1/4	1.49	1.85	3.10	30
XC-295	3	1 1/2	1.51	2.47	6.05	5
XC-296	3	2	1.51	2.47	6.05	5
XC-297	4	2 1/2	2.45	3.50	7.75	2
XC-298	5	3	3.07	4.02	8.88	1
XC-299	4	3 1/2	3.63	4.34	12.75	1
XC-2910	4	4	3.68	5.17	12.75	1

UL File No. E-1383.
CSA File No. LR-18130M57.

Insulated



CAT. NO.	FIG	SIZE (IN.)	DIMENSIONS (IN.)			STD. CTN.
			A (MIN.)	A (MAX.)	B	
XC-890	1	3/8	.40	.63	1.81	500
XC-891	1	1/2	.65	.97	2.18	250
XC-892	1	3/4	.77	1.12	2.38	100
XC-893	2	1	1.06	1.40	2.87	50
XC-894	2	1 1/4	1.34	1.65	3.93	30
XC-895	3	1 1/2	1.51	2.47	6.05	5
XC-896	3	2	1.51	2.47	6.05	5
XC-897	4	2 1/2	2.45	3.50	7.75	2
XC-898	5	3	3.07	4.02	8.88	1
XC-899	4	3 1/2	3.63	4.34	12.75	1
XC-8910	4	4	3.68	5.17	12.75	1

UL File No. E-1383.
CSA File No. LR-12798.

Clamp-Type Connector — Die-Cast Zinc



CAT. NO.	CONDUIT SIZE (IN.)	DIMENSIONS (IN.)			STD. CTN.
		A (MIN.)	A (MAX.)	B	
XC-280	3/8 (1/2 KO)	.18	.64	1.16	1,000

UL File No. E-1383
CSA File No. LR-18130M57.



Duplex Clamp-Type Connector — Die-Cast Zinc



CAT. NO.	CONDUIT SIZE (IN.)	DIMENSIONS (IN.)			STD. CTN.
		A (MIN.)	A (MAX.)	B	
XC-210	3/8 (1/2 KO)	.13	.65	1.56	250

CSA File No. LR-18130M57.