


## Overview


### Screw Terminal Inserts

- Integral screw terminal contacts provide for easy terminal wiring and fast assembly
- Standard wire protection saddles prevent cutting of strands during assembly

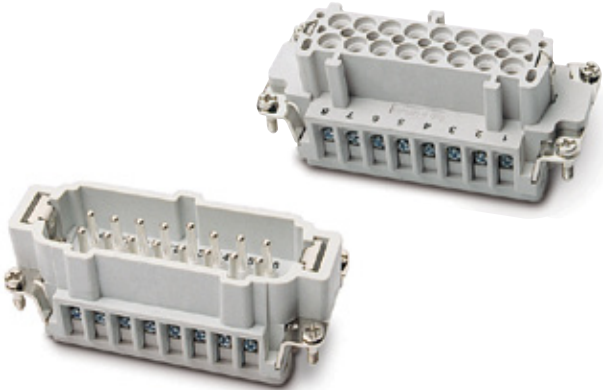

### Crimp Terminal Inserts

- Provides reliable connections for long-term configurations
- Contact sizes accommodate wiring from 12–20 AWG

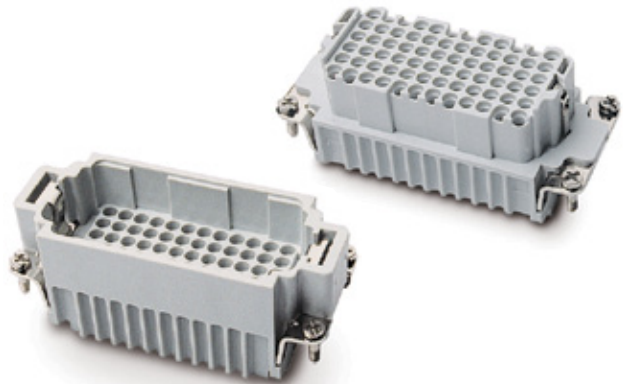

- Made of durable glass fiber-filled thermoplastic
- Contact numbers clearly marked for easy identification
- Easily installed (male or female) in either hoods or bases using captive mounting screws

### WAR, Right Ground Strap WAL, Left Ground Strap


### Terminal Block Wiring Adapters

- Allows for measuring of circuit while in operation
- Provide easy connections in panel mounting configurations
- Labels available for easy identification of circuits
- Can be mounted on DIN rails by using snap-on mounting feet
- Used in switch cabinets, panel enclosures or mounted in panel base housings — see B and D series

Insert Strip Blank – WAM1B

Insert Strip Nos. 1–64 – WAM1N64

Insert Strip Letters A–Z – WAM1AZ



#### WAM1 Marker Tab Clips

Snap-in formed label holder tabs allow terminal identification for B Series.



DIN Mounting Foot FE807TB

## A Series 16 Amps 600VAC

3 or 4 Contacts + Ground: 10A  
10, 16 & 32 Contacts + Ground: 16A



Use small blade screwdriver to push wire entry tab in for easy contact removal.



**Crimp Tool**

CAT. NO.

WT611TB

### Install to Matching Series Hood/Base


| 3 OR 4 (600V) | 10 | 16 | 32 |
|---------------|----|----|----|
|               |    |    |    |

### Screw Terminal Inserts

| SCREW TERMINAL INSERTS                                               | 3 OR 4 + G                                       | 10 + G        | 16 + G        | 32 + G                |
|----------------------------------------------------------------------|--------------------------------------------------|---------------|---------------|-----------------------|
| <p><b>Male – Pins</b><br/>20–14 AWG (.5–2.5 mm<sup>2</sup>)</p>      | <p><b>MS203A or MS204A</b><br/>(16 AWG max.)</p> | <b>MS210A</b> | <b>MS216A</b> | <b>MS216A+ MS232A</b> |
| <p><b>Female – Sleeves</b><br/>20–14 AWG (.5–2.5 mm<sup>2</sup>)</p> | <p><b>FS103A or FS104A</b><br/>(16 AWG max.)</p> | <b>FS110A</b> | <b>FS116A</b> | <b>FS116A+ FS132A</b> |

## Technical Information

### Mounting Dimensions for Screw and Crimp Terminal Inserts

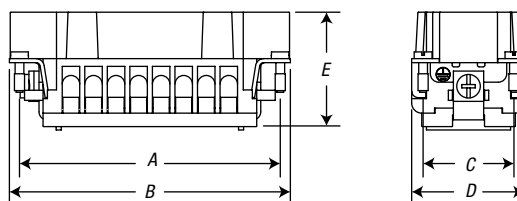

| HOUSING SERIES |               |        |       | DIMENSIONS ARE IN INCHES/(MILLIMETERS) |             |             |                |           |             |
|----------------|---------------|--------|-------|----------------------------------------|-------------|-------------|----------------|-----------|-------------|
| A, B, T, K     | C, V          | D      | DD    | MATING                                 | A           | B           | C              | D         | E           |
| A3, A4         |               |        |       | BOTH                                   | —           | .83/(21)    | —              | .83/(21)  | .98/(25)    |
|                |               | D7, D8 |       | FEMALE                                 | —           | .83/(21)    | —              | .83/(21)  | 1.25/(31.8) |
|                |               |        |       | MALE                                   | —           | .83/(21)    | —              | .83/(21)  | 1.19/(30.2) |
| A10            |               | D15    |       | FEMALE                                 | 1.95/(49.5) | 2.22/(56.5) | .63/(16)       | 1.34/(34) | 1.14/(29)   |
|                |               |        |       | MALE                                   | 1.95/(49.5) | 2.22/(56.5) | .63/(16)       | 1.34/(34) | 1.26/(32)   |
| A16            |               | D25    |       | FEMALE                                 | 2.60/(66)   | 2.87/(73)   | .63/(16)       | 1.34/(34) | 1.14/(29)   |
|                |               |        |       | MALE                                   | 2.60/(66)   | 2.87/(73)   | .63/(16)       | 1.34/(34) | 1.26/(32)   |
| A32            |               | D50    |       | FEMALE                                 | 2.60/(66)   | 2.87/(73)   | .63/(16) x 2   | 1.34/(34) | 1.14/(29)   |
|                |               |        |       | MALE                                   | 2.60/(66)   | 2.87/(73)   | .63/(16) x 2   | 1.34/(34) | 1.26/(32)   |
| B6, T6         |               |        | DD24  | FEMALE                                 | 1.73/(44)   | 2.01/(51)   | 1.063/(27)     | 1.34/(34) | 1.46/(37)   |
|                |               |        |       | MALE                                   | 1.73/(44)   | 2.01/(51)   | 1.063/(27)     | 1.34/(34) | 1.38/(35)   |
| B10, T10       | V3            |        | DD42  | FEMALE                                 | 2.24/(57)   | 2.52/(64)   | 1.063/(27)     | 1.34/(34) | 1.46/(37)   |
|                |               |        |       | MALE                                   | 2.24/(57)   | 2.52/(64)   | 1.063/(27)     | 1.34/(34) | 1.38/(35)   |
| B16, T16       | C6, V6        | D40    | DD72  | FEMALE                                 | 3.05/(77.5) | 3.33/(84.5) | 1.063/(27)     | 1.34/(34) | 1.48/(37.5) |
|                |               |        |       | MALE                                   | 3.05/(77.5) | 3.33/(84.5) | 1.063/(27)     | 1.34/(34) | 1.40/(35.5) |
| B24, T24, K12  | V10, V16      | D64    | DD108 | FEMALE                                 | 4.09/(104)  | 4.37/(111)  | 1.063/(27)     | 1.34/(34) | 1.48/(37.5) |
|                |               |        |       | MALE                                   | 4.09/(104)  | 4.37/(111)  | 1.063/(27)     | 1.34/(34) | 1.40/(35.5) |
| B32            | C12           | D80    | DD144 | FEMALE                                 | 3.05/(77.5) | 3.33/(84.5) | 1.063/(27) x 2 | 1.34/(34) | 1.48/(37.5) |
|                |               |        |       | MALE                                   | 3.05/(77.5) | 3.33/(84.5) | 1.063/(27) x 2 | 1.34/(34) | 1.40/(35.5) |
| B48, K24       | V20, V26, V32 | D128   | DD216 | FEMALE                                 | 4.09/(104)  | 4.37/(111)  | 1.063/(27) x 2 | 1.34/(34) | 1.48/(37.5) |
|                |               |        |       | MALE                                   | 4.09/(104)  | 4.37/(111)  | 1.063/(27) x 2 | 1.34/(34) | 1.40/(35.5) |