


Channels, Straps and Clamps

B-900 Channel — 1½" x 1½"

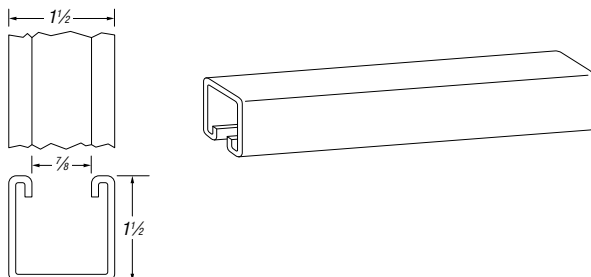


CAT. NO.	DESCRIPTION	LENGTH (FT.)
B-900-10SS	Type 304	10
B-900-10316-SS	Type 316	10

Use H-113-B bolts and B-910-1/2 or B-911-1/2 stainless steel nuts for mounting fittings.

Available 20 ft. lengths.

B-905 Channel — 1½" x 1½"

- ⅝" holes on 1½" centers punched in channel base. Connection also by means of continuous slot.

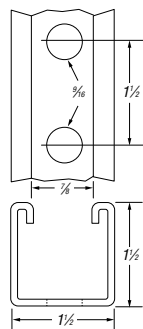

CAT. NO.	DESCRIPTION	LENGTH (FT.)
B-905-10SS	Type 304	10
B-905-10-316SS	Type 316	10


Use H-113-B bolts and B-910-1/2 or B-911-1/2 stainless steel nuts for mounting fittings.

Scribe marks designate mid-point between holes for accurate field cutting.

Available 20 ft. lengths.

B-907 Channel — 1½" x ¾"

- Connection by means of continuous slot or ⅝" holes on 1½" centers

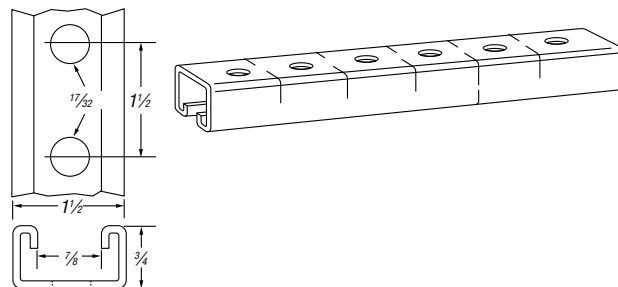

CAT. NO.	DESCRIPTION	LENGTH (FT.)
B-907-10SS	Type 304	10
B-907-10316SS	Type 316	10

Available 20 ft. lengths.

Straps for Rigid Conduit and Pipe — Type 304 Stainless Steel



C-105

CAT. NO.	RIGID CONDUIT OR PIPE SIZE (IN.)
C-105-1/2SS	½
C-105-3/4SS	¾
C-105-1SS	1
C-105-1-1/4SS	1¼
C-105-1-1/2SS	1½
C-105-2SS	2
C-105-2-1/2SS	2½
C-105-3SS	3
C-105-3-1/2SS	3½
C-105-4SS	4

For Type 316 Stainless Steel, add 316 suffix.