

## 52®/53® Series Liquidtight Fittings and Flexible Metallic Conduits

Sealing material resists oil, coolants and hydraulic fluids as well as water!

### Liquidtight Sealing Gasket

The 5262 Series Sealing Gasket includes a stainless steel retaining ring to prevent elongation of the Santoprene® gasket, ensuring a superior seal.

#### Application

- When used with an externally threaded connector, provides a tight seal against oil, fumes or moisture at the knockout opening

#### Features

- Design locks resilient sealing material in steel
- Steel retainer protects seal from extruding out under torque and limits compression to an optimum predetermined value; provides high-quality seal
- Resilient material flows and seals rough surfaces
- NEMA 3R, 4, 6 and 13

#### Standard Material


Retainer .....316 Stainless Steel

Sealing Material.....Santoprene®


Thermoplastic Rubber

#### Range

¼" thru 4" Hub Size



5262 Series Sealing Gasket

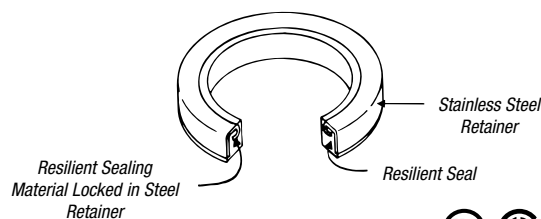

| CAT. NO. | CONDUIT SIZE | DIMENSIONS (IN.) |     | STD. PKG. QTY. |
|----------|--------------|------------------|-----|----------------|
|          |              | A                | B   |                |
| 5299**   | ¼"           | .80              | .11 | 50             |
| 5261**   | ¾"           | .95              | .11 | 50             |
| 5262     | ½"           | 1.16             | .18 | 50             |
| 5263     | ¾"           | 1.49             | .19 | 25             |
| 5264     | 1"           | 1.75             | .19 | 25             |
| 5265     | 1¼"          | 2.15             | .22 | 5              |
| 5266     | 1½"          | 2.42             | .23 | 5              |
| 5267     | 2"           | 2.92             | .23 | 5              |
| 5268     | 2½"          | 3.44             | .23 | 5              |
| 5269     | 3"           | 4.08             | .23 | 5              |
| 5270     | 4"           | 5.29             | .31 | 5              |


\*\* UL not applicable.

UL File No. E 13938 CSA File No. 2884

Santoprene is a registered trademark of Advanced Elastomer Systems.

Provides a re-usable rain-, dust- and oil-tight seal for unused knockouts!

### Liquidtight K.O. Plug



- No need to replace a NEMA 3R, 4, 6 or 13 box when a knockout is no longer used
- No tools needed to install — just push into knockout hole, and plug snaps in
- Made of flame-retardant Neoprene
- Meets UL 514 flammability test and NEMA 3R, 4, 6 and 13 requirements
- Temperature range — 30° C to 105° C

| CAT. NO. | SIZE | A   |
|----------|------|-----|
| 5710     | ½"   | 1⅞" |
| 5711     | ¾"   | 1½" |
| 5712     | 1"   | 1⅞" |
| 5713     | 1¼"  | 2⅞" |
| 5714     | 1½"  | 2½" |
| 5715     | 2"   | 3⅞" |
| 5716     | 2½"  | 3⅞" |
| 5717     | 3"   | 4⅞" |
| 5718     | 4"   | 5⅞" |

UL Listed raintight.

Meets Coast Guard Regulation CG293.

UL File No. E 13938

CSA File No. 2884