
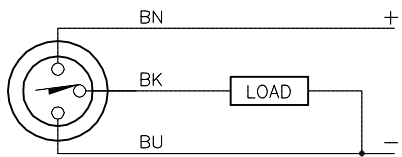
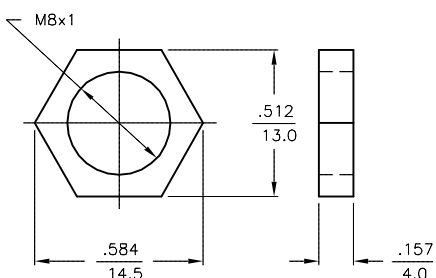
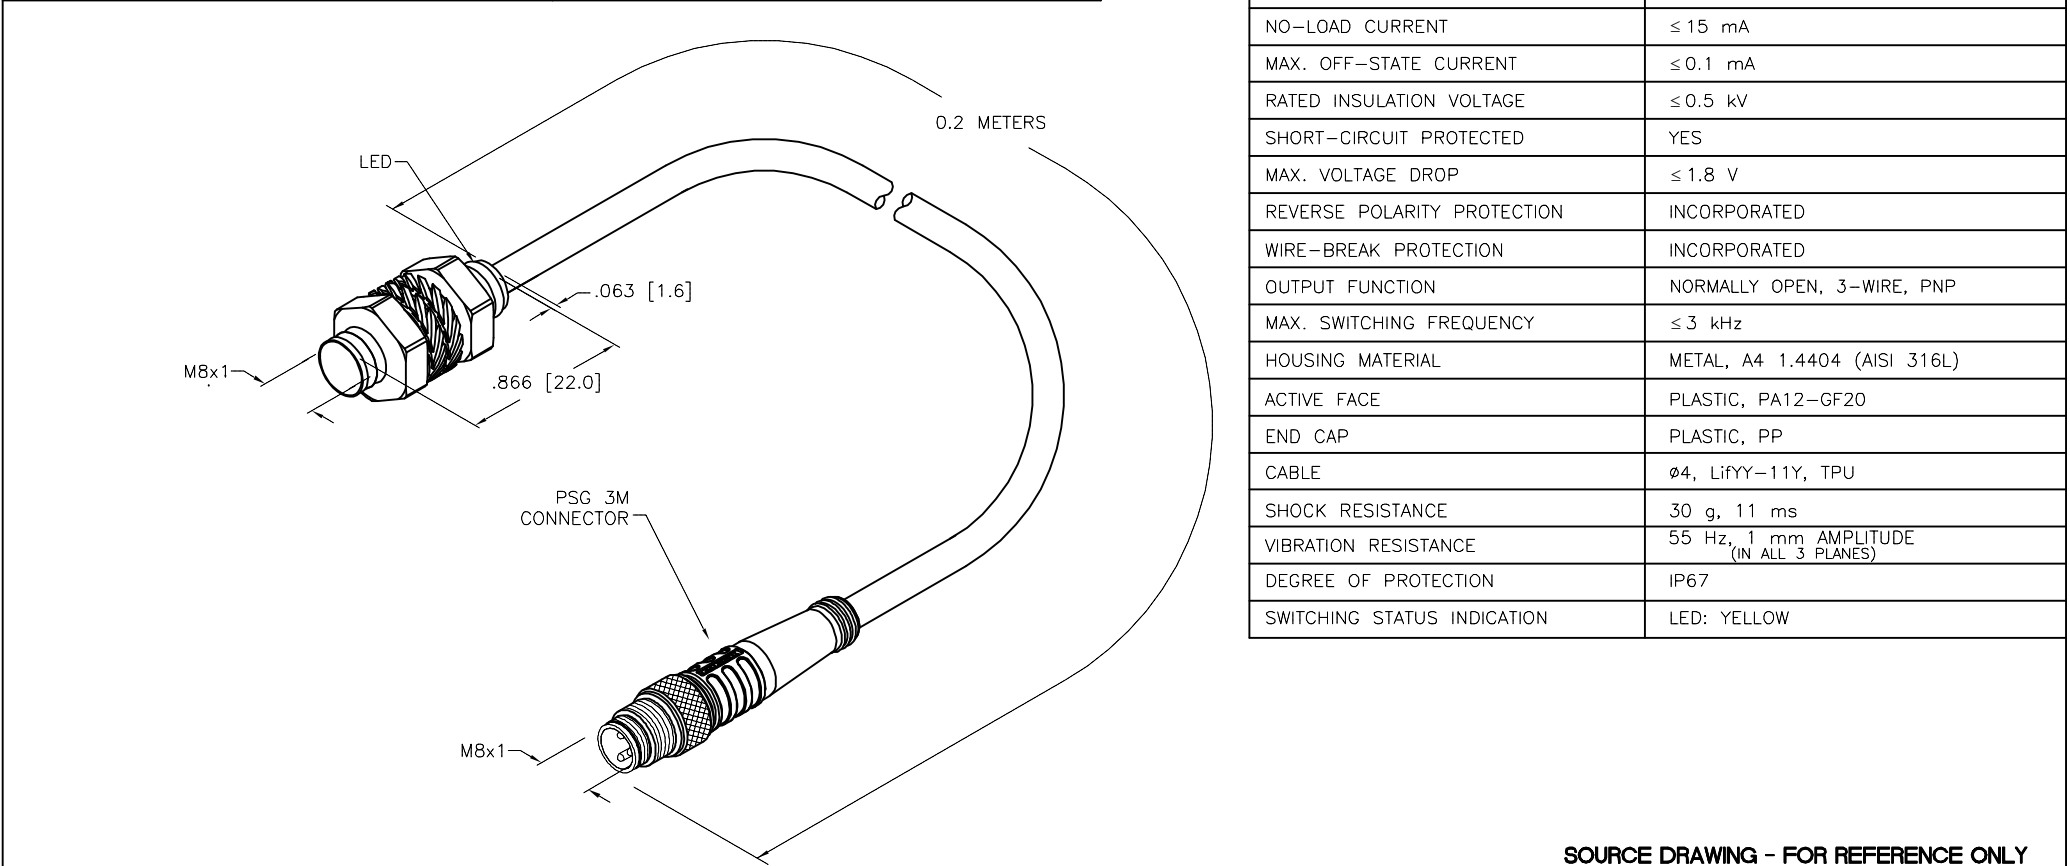


WIRING DIAGRAM		LOCKNUT LN-M8		SPECIFICATIONS																			
 OUTPUT: AP6X				<table><tr><td>RATED OPERATING DISTANCE</td><td>2mm =.079"</td></tr><tr><td>MOUNTING MODE</td><td>FLUSH</td></tr><tr><td>MIN. REPEAT ACCURACY</td><td>≤2%</td></tr><tr><td>TEMPERATURE DRIFT</td><td>≤±10%</td></tr><tr><td>HYSTERESIS (SWITCHING DISTANCE)</td><td>3–15%</td></tr><tr><td>OPERATING TEMPERATURE</td><td>–25°C to +70°C (–13°F to +158°F)</td></tr><tr><td>RATED OPERATIONAL VOLTAGE</td><td>10–30 VDC</td></tr><tr><td>MAX. RIPPLE</td><td>≤10%</td></tr><tr><td>RATED OPERATIONAL CURRENT</td><td>≤150 mA</td></tr></table>		RATED OPERATING DISTANCE	2mm =.079"	MOUNTING MODE	FLUSH	MIN. REPEAT ACCURACY	≤2%	TEMPERATURE DRIFT	≤±10%	HYSTERESIS (SWITCHING DISTANCE)	3–15%	OPERATING TEMPERATURE	–25°C to +70°C (–13°F to +158°F)	RATED OPERATIONAL VOLTAGE	10–30 VDC	MAX. RIPPLE	≤10%	RATED OPERATIONAL CURRENT	≤150 mA
RATED OPERATING DISTANCE	2mm =.079"																						
MOUNTING MODE	FLUSH																						
MIN. REPEAT ACCURACY	≤2%																						
TEMPERATURE DRIFT	≤±10%																						
HYSTERESIS (SWITCHING DISTANCE)	3–15%																						
OPERATING TEMPERATURE	–25°C to +70°C (–13°F to +158°F)																						
RATED OPERATIONAL VOLTAGE	10–30 VDC																						
MAX. RIPPLE	≤10%																						
RATED OPERATIONAL CURRENT	≤150 mA																						
SHORT-CIRCUIT AND OVERLOAD PROTECTED																							



					SOURCE DRAWING - FOR REFERENCE ONLY			
RELATED DOCUMENTS 1. 2. 3. 4.					3RD ANGLE PROJECTION  THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. DRFT RDS DATE 06/02/08			
MATERIAL FINISH					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION UNIT OF MEASUREMENT INCH [MILLIMETER] DO NOT SCALE THIS DRAWING			
3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com					DESCRIPTION BI 2-EG08K-AP6X-0.2M-PSG 3M IDENTIFICATION NO. S4669499 REV C			
C UPDATE PICOFAST COUPLING NUT PER ECO BY KMY DATE 05/21/13 ECO NO. 40191					FILE: S4669499 SHEET 1 OF 1			