

Inductive Barrel Sensor Selection Guide

Embeddable/Nonembeddable Barrels				
				
Housing	30 mm	30 mm	30 mm	30 mm
Sensing Range	10 - 30 mm	10 - 20 mm	10 - 30 mm	10 - 20 mm
Pages	B117 - 132	B127	B143	B133 - 140
Features	Uprox	Uprox	Uprox	Uprox
2-wire	•	•	•	•
3/4-wire	•	•	•	•
2-wire AC/DC	•	•	•	•

Embeddable/Nonembeddable Barrels				
				
Housing	30 mm	30 mm	40 mm	47 mm
Sensing Range	10 - 20 mm	10 - 20 mm	30 mm	20 - 25 mm
Pages	B145	B145	B147	B147
Features	Uprox			
2-wire				
3/4-wire	•	•	•	•
2-wire AC/DC	•	•	•	•

Embeddable/Nonembeddable Barrels				
				
Housing	47 mm	40 mm	47 mm	Variable
Sensing Range	20 - 25 mm	15 - 30 mm	25 - 40 mm	1 - 15 mm
Pages	B147	B149	B149	B151 - 162
Features				
2-wire				•
3/4-wire	•	•	•	
2-wire AC/DC	•	•	•	

We reserve the right to make technical alterations without prior notice.



Inductive Barrel Sensors

NOTE:
Part number keys are to assist in identification only.
Verify new part numbers with factory; some configurations are not possible.

Inductive Barrel Sensor Part Number Key

Wiring Options*

A. Connectorized Sensor

Bi2-M12-AN6X -

H1141

Connector Family

B1 = Minifast®, 7/8"-16UN, metal, male
B2 = Minifast®, 7/8"-16UN, plastic, male
B3 = Microfast®, 1/2"-20UNF, metal, male
H1 = Eurofast®, M12x1, metal or plastic, male
V1 = Picofast®, snap and M8x1, metal, male (Q08 snap only)
V2 = Picofast®, snap and M8x1, male (Q08 only)

Factory Code

Example:
0 = non-standard wiring
1 = standard wiring
3 = N.C. DC output on pin 4
4 = N.O. 2-wire DC output on pin 4

Connector/Sensor Transition

1 = straight
3 = straight with adapter
4 = right-angle with adapter

Number of Pins

B. Potted Cable

Bi2-G12-AN6X

7M

Cable Length

(blank) = 2 meter cable
7M = 7 meter cable
*M = custom cable lengths available

C. Potted Cable with Molded Connector

Bi2-G12-Y0X - 0.2M - RS 4.21T

Cable Length

examples:
0.2M = 0.2 meters (minimum)
2M = 2 meter cable
7M = 7 meter cable

Standard Cordset Connector

AC: RSM 30 = Minifast, 7/8"-16UN, metal, male, 3-conductor
SB 3T = Microfast, 1/2"-20UNF, metal, male, 30 conductor
DC: RS 4T = Eurofast, M12x1, metal or plastic, male, 3-conductor
RS 4.2T = Eurofast, M12x1, metal or plastic, male, 2-conductor
RS 4.21T = Eurofast, M12x1, metal or plastic, male, NAMUR, 2-conductor
RS 4.4T = Eurofast, M12x1, metal or plastic, male, 4-conductor
RSM 40 = Minifast, 7/8"-16UN, metal, male, 4-conductor
PSG 3 = Picofast, snap, plastic, male, 3-conductor
PSG 3M = Picofast, M8x1, male, 3-conductor

Option Codes for Special or Custom-Built Sensors**

Bi2-S12-AN7X /S100 or Bi10-M30-AN6X-H1141 /F2

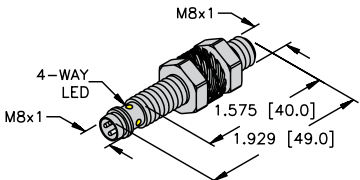
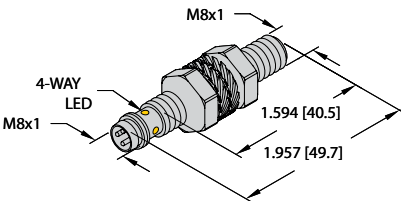
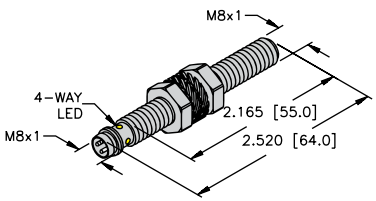


examples:
/S34 = weld field immune
/S90 = TPU cable
/S97 = -40 °C (-40 °F) operating temperature
/S100 = +100 °C (+212 °F) operating temperature
/S1589 = barrel sensors with Weldguard® laminate
/S1610 = barrel sensors with tool steel sleeve and Weldguard® laminate

example:
/F2 = alternate oscillator frequency

We reserve the right to make technical alterations without prior notice.

Inductive Barrel Sensors | 8 mm

Embeddable Threaded Metal Barrels with Connector and DC Outputs

Housing Style		Dimension Drawings	
		A	 8 mm - Embeddable, Miniature Threaded, M8 Picofast Quick Disconnect
B	 8 mm - Embeddable, Miniature Threaded, M8 Picofast Quick Disconnect	C	 8 mm - Embeddable, Miniature Threaded, M8 Picofast Quick Disconnect
Wiring Diagrams/Mating Cordsets			
1	 Mating Cordset: PKG 3M-*	2	 Mating Cordset: PKG 3M-*; PKG 3M-*/S1587
A4			
3 and 4-wire DC - (AN, RN, AP, RP, VN, VP)			
Ripple: ≤10%		Time Delay Before Availability: ≤8 ms	
Differential Travel (Hysteresis): 3-15% (5% typical)		Power-On Effect: Per IEC 947-5-2	
Voltage Drop Across Conducting Sensor: ≤1.8 V		Reverse Polarity Protection: Incorporated	
Trigger Current for Short Circuit Protection: ≥220 mA on 200 mA Load Current		Wire-Break Protection: Incorporated	
≥170 mA on 150 mA Load Current		Transient Protection: Per EN 60947-5-2	
≥120 mA on 100 mA Load Current		Temperature Drift: ≤±10%	
Off-State (Leakage) Current: ≤0.1 mA		Shock: 30 g, 11 ms	
No-Load Current: ≤15 mA (Ferrite, Uprox)		Vibration: 55 Hz, 1 mm Amplitude in all 3 Planes	
≤20 mA (Uprox+, Uprox3)		Repeatability: ≤2% of Rated Operating Distance	

We reserve the right to make technical alterations without prior notice.



Inductive Barrel Sensors | 8 mm

Embeddable Threaded Metal Barrels with Connector and DC Outputs

Part Number/ ID Number	Features	Sensing Range (mm)	Output	Voltage	Switching Freq. (Hz)	Operating Current (mA)	Operating Temp. (°C)	Protection	Housing	Face	Power LED	Output LED	Dimension Drawings	Wiring Diagrams	Spec List
Bi2U-EG08-AN6X-V1131 4602036	Uprox	2	3-wire DC NPN	10-30 VDC	1000	≤150	-30 to +85	IP68	SS	PA 12	N/A	YE	C	1	A4
Bi2U-EG08-AP6X-V1131 4602033	Uprox	2	3-wire DC PNP	10-30 VDC	1000	≤150	-30 to +85	IP68	SS	PA 12	N/A	YE	C	2	A4
Bi2-EG08-AN6X-V1131 4602150		2	3-wire DC NPN	10-30 VDC	3000	≤150	-25 to +70	IP67	SS	PA 12	N/A	YE	C	1	A4
Bi2-EG08-AP6X-V1131 4602050		2	3-wire DC PNP	10-30 VDC	3000	≤150	-25 to +70	IP67	SS	PA 12	N/A	YE	C	2	A4
Bi2-EG08-AP6X-V1131/S1589 46020501	Weldguard	2	3-wire DC PNP	10-30 VDC	3000	≤150	-25 to +70	IP67	SS	WG	N/A	YE	C	2	A4
Bi2-EGT08-AP6X-V1131/S100 4602263	PTFE, High Temp. 100 °C	2	3-wire DC PNP	10-30 VDC	3000	≤150	-25 to +100	IP67	SS	TC	N/A	YE	C	2	A4
Bi2-EGT08-AP6X-V1131/S100/S1589 4602072	PTFE, High Temp. 100 °C, Weldguard	2	3-wire DC PNP	10-30 VDC	3000	≤150	-25 to +100	IP67	SS	WG	N/A	YE	C	2	A4
Bi2-G08-AP6X-V1131 4602002		2	3-wire DC PNP	10-30 VDC	3000	≤150	-25 to +70	IP67	SS	PA 12	N/A	YE	C	2	A4
Bi2-M08E-AN6X-V1131 4602953		2	3-wire DC NPN	10-30 VDC	2800	≤150	-25 to +70	IP67	CPB	PP- GF20	N/A	YE	B	1	A4
Bi2-M08E-AP6X-V1131 4602956		2	3-wire DC PNP	10-30 VDC	2800	≤150	-25 to +70	IP67	CPB	PP- GF20	N/A	YE	B	2	A4
Bi1.5U-EG08-AN6X-V1131 4600530	Uprox	1.5	3-wire DC NPN	10-30 VDC	2000	≤150	-30 to +85	IP68	SS	PA 12	N/A	YE	A	1	A4
Bi1.5U-EG08-AP6X-V1131 4600520	Uprox	1.5	3-wire DC PNP	10-30 VDC	2000	≤150	-30 to +85	IP68	SS	PA 12	N/A	YE	A	2	A4
Bi1.5-EG08-AN6X-V1131 4602350		1.5	3-wire DC NPN	10-30 VDC	3000	≤150	-25 to +70	IP67	SS	PA 12	N/A	YE	A	1	A4
Bi1.5-EG08-AP6X-V1131 4602220		1.5	3-wire DC PNP	10-30 VDC	3000	≤150	-25 to +70	IP67	SS	PA 12	N/A	YE	A	2	A4

We reserve the right to make technical alterations without prior notice.

Inductive Barrel Sensors

