

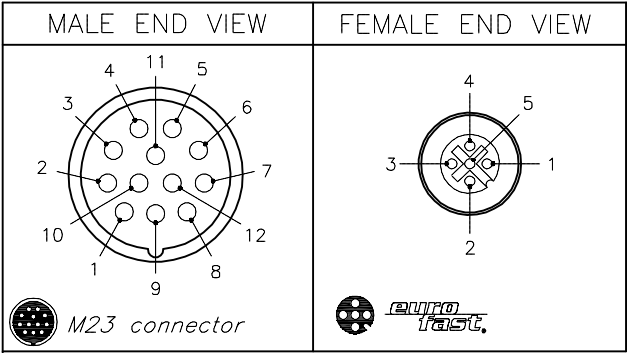
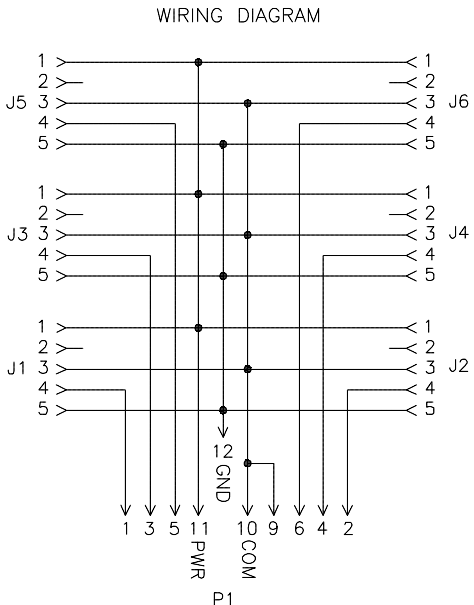


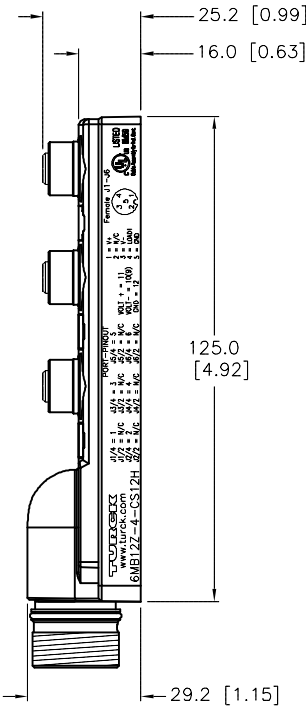

SPECIFICATIONS	
HOUSING MATERIAL/COLOR	NYLON/BLACK
RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
CONTACT CARRIERS	NYLON
CONTACT CARRIER MATERIAL/PLATING	BRASS/GOLD
O-RING MATERIAL	NBR (P1), VITON (J1-J6)
OPERATING VOLTAGE	250 VDC
OPERATING CURRENT	4.0 AMPS/SIGNAL, 9.0 AMPS TOTAL
PROTECTION CLASS	IP67,IP69K; ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +85°C (-40°F to +185°F)

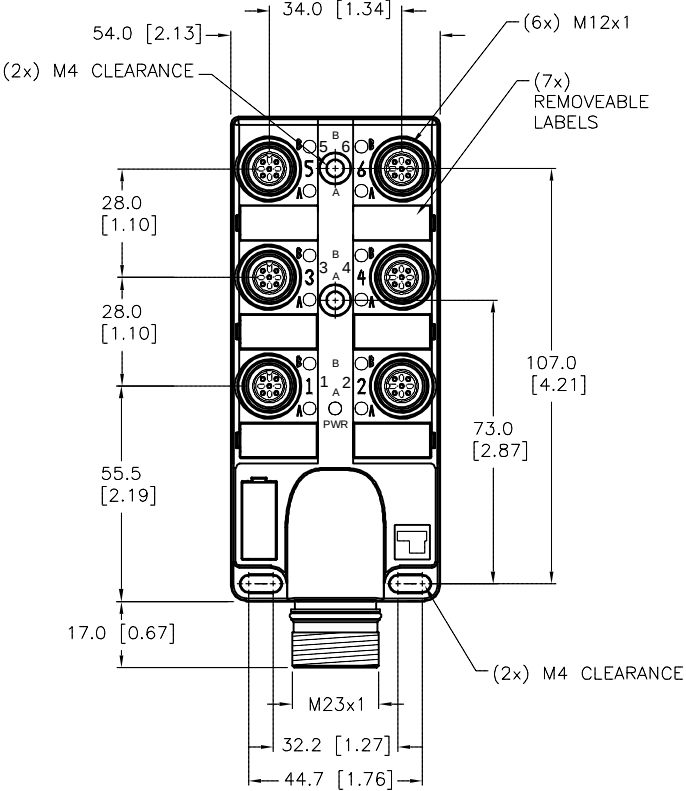

SOURCE DRAWING - FOR REFERENCE ONLY

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	DRFT RDS	DATE 08/06/12	DESCRIPTION
1.			APVD J.S.	SCALE 1=2	6MB12Z-4-CS12H
2.			UNIT OF MEASUREMENT		IDENTIFICATION NO.
3.			MILLIMETER [INCH]		U2-19918
4.			DO NOT SCALE THIS DRAWING		REV E
MATERIAL	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	FILE: U2-19918		
FINISH	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	SHEET 1 OF 1		

E	UPDATED VOLTAGE AND AMP RATINGS PER ECO	TV	08/24/17	57007
REV	DESCRIPTION	BY	DATE	ECO NO.