


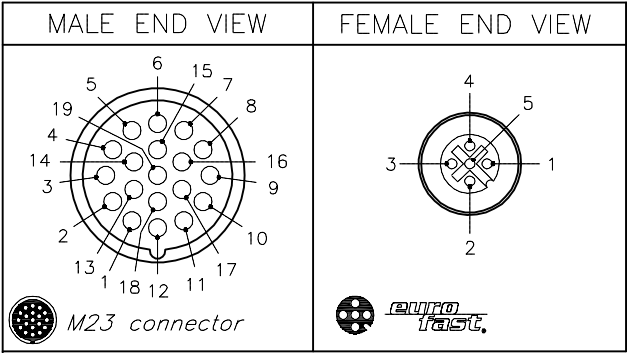
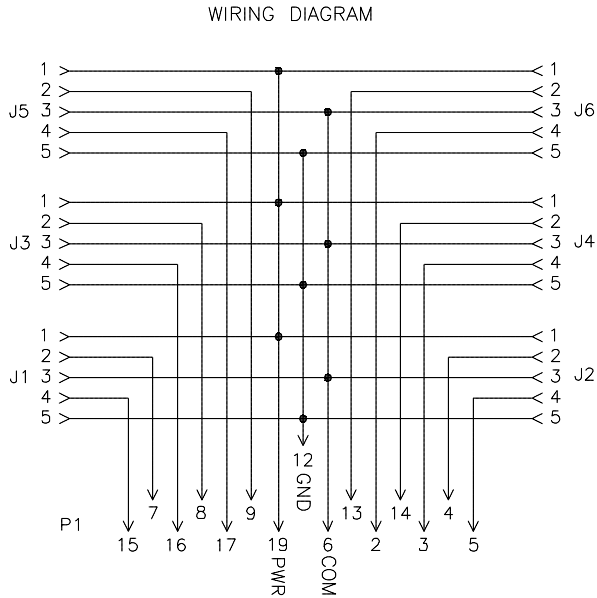


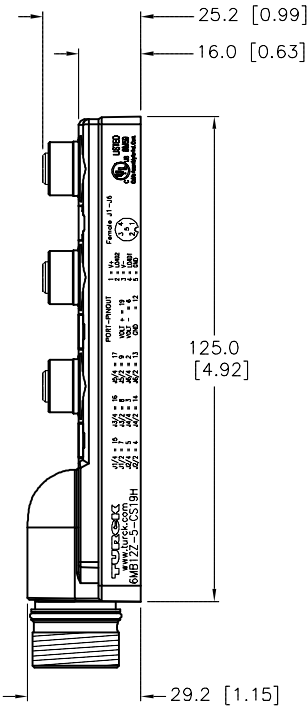

SPECIFICATIONS	
HOUSING MATERIAL/COLOR	NYLON/BLACK
RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
CONTACT CARRIERS	NYLON
CONTACT CARRIER MATERIAL/PLATING	BRASS/GOLD
O-RING MATERIAL	NBR (P1), VITON (J1-J6)
OPERATING VOLTAGE	60 VDC
OPERATING CURRENT	2.0 AMPS/SIGNAL, 9.0 AMPS TOTAL
PROTECTION CLASS	IP67,IP69K; ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +85°C (-40°F to +185°F)

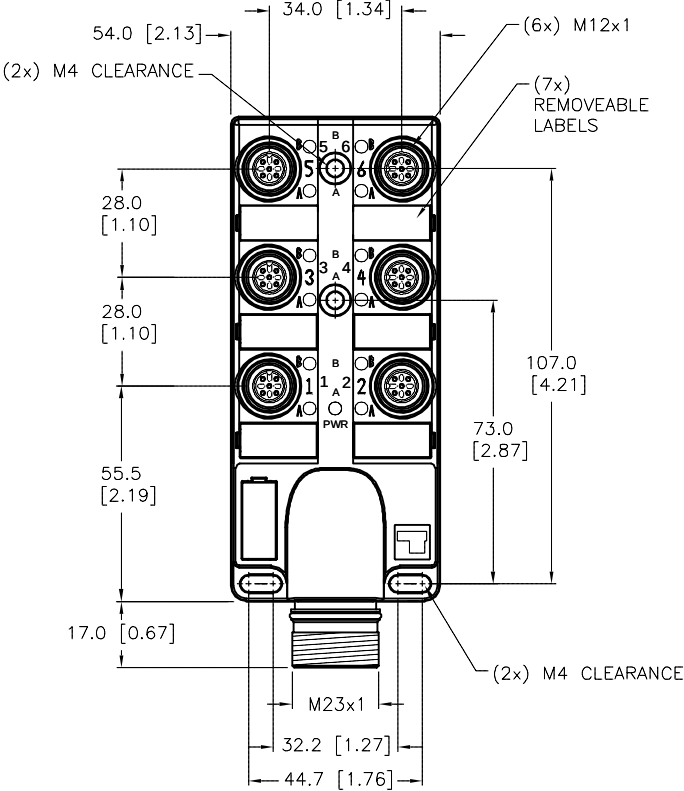

SOURCE DRAWING - FOR REFERENCE ONLY



RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1.							
2.							
3.							
4.							
MATERIAL		DRFT RDS		DATE 08/06/12		DESCRIPTION 6MB12Z-5-CS19H	
SEE SPECIFICATIONS		APVD J.S.		SCALE 1=2			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-19921		REV E	
SEE SPECIFICATIONS							
		DO NOT SCALE THIS DRAWING		FILE: U2-19921		SHEET 1 OF 1	

E	UPDATE OPERATING CURRENT	NF	02/03/17	57053
REV	DESCRIPTION	BY	DATE	ECO NO.