

TOSHIBA

TOSHIBA INTERNATIONAL CORPORATION

ADJUSTABLE SPEED DRIVES

AS3P

**LOW
VOLTAGE**



HARNESSING THE POWER OF BUILT-IN COMMUNICATIONS

The durable AS3P adjustable speed drive (ASD) outdoor assembly is a short lead time product available at low costs by utilizing a standardized design with modification options. These include line reactors, surge arrestors, cabinet space heater, and a maximum of four door-mounted control options. All units have a UL Type 3R outdoor rated free standing enclosure.



Industry 4.0/IoT (Internet of Things)	Industry 4.0 is the evolution of manufacturing, empowering businesses to learn and adjust from data available through connected manufacturing.
Dual Port Ethernet IP	Enables simple connection of multiple AS3s together on one network while simplifying cable management.
Embedded Web Server	Allows for quick access to Ethernet IP setup, parameters and real-time monitoring for diagnostics. Accessible through standard web browsers on PC, tablets, and smart phones.
Built-in LCD Display & Advanced Keypad	Multi-language LCD display, remote mounting, IP65 rated, transfer/save parameters, real-time clock for fault logging, and calendar functionality.
QR Codes	Displayed when troubleshooting faults or alarms, providing immediate access to a dedicated web link for maintenance and support.
STO Terminal	Detachable terminal strip meets IEC directives for safety with full implementation of Safe Torque Off, which quickly shuts down the system in the event of an emergency stop.
Permanent Magnet Motor Control	For control of permanent magnet (PM) motors with higher torque and efficiency values.
Pump Control	Multi-PID control with sleep function and the ability to autonomously control booster pumps based on system demands or operating a secondary PID control loop.
ASD Pro Software	Toshiba's programming software, which allows the user to utilize logic-type programming without the expense of a micro PLC.

COMMUNICATION OPTIONS

In addition to the built-in dual port Ethernet, the AS3 can make use of a wide array of easily installed option boards. These boards allow the user to communicate with a wide variety of systems when installed cassette style. Options include:

- Ethernet/IP (Embedded)
- Modbus TCP (Embedded)
- Modbus RTU (Embedded)
- PROFINET
- EtherCAT
- PROFIBUS-DP
- DeviceNET
- CAN open

ADDITIONAL OPTIONS

The low cost short lead time outdoor rated AS3P can additionally be supplied with standard options including:

- 3% Impedance Input Line Reactor
- 5% Impedance Input Line Reactor
- Standard Surge Arrestor
- Three Raycap Strikesorb Surge Arrestors
- Two or Three Position Selector Switch (e.g. LOCAL/REMOTE, HAND/OFF/AUTO)
- Standard Push Button (e.g. RUN, STOP, RESET)
- Standard Pilot Light (e.g. POWER ON, ASD FAULTED, ASD RUNNING, ASD STOPPED)
- Cabinet Space Heater with Thermostat

OTHER SPECIAL FEATURES

- Broad Range of Compliances
- NEC 2005 Motor Overload Retention (No External Motor Overloads Required)
- UL Type 3R Outdoor Rated Free Standing Enclosure
- UL Listed & Labeled

INDUSTRIES SERVED

- Oil & Gas
- Mining & Minerals
- Chemical
- Water & Wastewater

APPLICATIONS

- Pumps
- Fans
- Compressors
- Centrifuges
- Conveyors
- Mixers
- Pump Jacks
- Crushers
- Cranes
- Hoists



1. Dual Port Ethernet IP
2. RS485 Communication Port
3. Up to 3 Embedded Option Card Slots
4. Safe Torque Off Terminals
5. 3 Digital Output Relays
6. 3 Analog Inputs
7. 2 Analog Outputs
8. 8 Digital Inputs



RATINGS

TYPE	VOLTAGE	HP (HD)	AMPS (HD)	HP (ND)	AMPS (ND)	DIMENSIONS (in.)		
						H	W	D
AS3P4055	460	7.5	12.7	10	16.5	72	32	20
AS3P4075	460	10	16.5	15	23.5			
AS3P4110	460	15	23.5	20	31.7	72	34	22
AS3P4150	460	20	31.7	25	39.2			
AS3P4185	460	25	39.2	30	46.3			
AS3P4220	460	30	46.3	40	61.5			
AS3P4300	460	40	61.5	50	74.5			
AS3P4370	460	50	74.5	60	88.0			
AS3P4450	460	60	88.0	75	106			
AS3P4550	460	75	106	100	145			
AS3P4750	460	100	145	125	173	74	38	26
AS3P4900	460	125	173	150	211			
AS3P4110K	460	150	211	200	250			
AS3P4132K	460	200	250	250	302			

FULL OPTIONS LIST	DESCRIPTION
AA*	Includes AS3, Input Circuit Breaker and All Necessary Components for Operation in a UL Type 3R Outdoor Rated Free Standing Enclosure
3% ACL	3% Impedance Input Line Reactor
5% ACL	5% Impedance Input Line Reactor
Standard Surge Arrestor	Standard Surge Arrestor; Make and Model May Vary
Raycap Strikesorb Surge Arrestor	Three (3) Raycap Strikesorb Surge Arrestors on Incoming Side of Unit
2- or 3-Position Selector Switch	Two- or Three-Position Selector Switch (e.g. LOCAL/REMOTE, HAND/OFF/AUTO)
Push Button	Standard Push Button (e.g. RUN, STOP, RESET, E-STOP)
Pilot Light	Standard Pilot Light (e.g. POWER ON, ASD FAULTED, ASD RUNNING, ASD STOPPED)
Cabinet Space Heater	Installed Cabinet Space Heater with Thermostat

*Standard

© 2019
Toshiba International Corporation
Motors & Drives Division
13131 West Little York Road
Houston, Texas 77041 USA
Tel +713-466-0277
US 1-800-231-1412
Rev.01ESSENCE2919



TOSHIBA MOTORS & DRIVES DIVISION
Adjustable Speed Drives • Motors • Motor Controls

www.toshiba.com/tic



Scan here to learn
more about the AS3


TOSHIBA
TOSHIBA INTERNATIONAL CORPORATION

[Standard connection diagram - Sink]

This diagram shows an example of a standard connection for 240 V class, 0.4 to 37kW and 480 V class, 0.4 to 75kW (frame size A1 to A5).

Power supply

240 V class:	
0.4 - 37 kW	Three-phase 200 - 240 V-50/60 Hz
480 V class:	
0.4 - 75kW	Three-phase 380 - 480 V-50/60 Hz

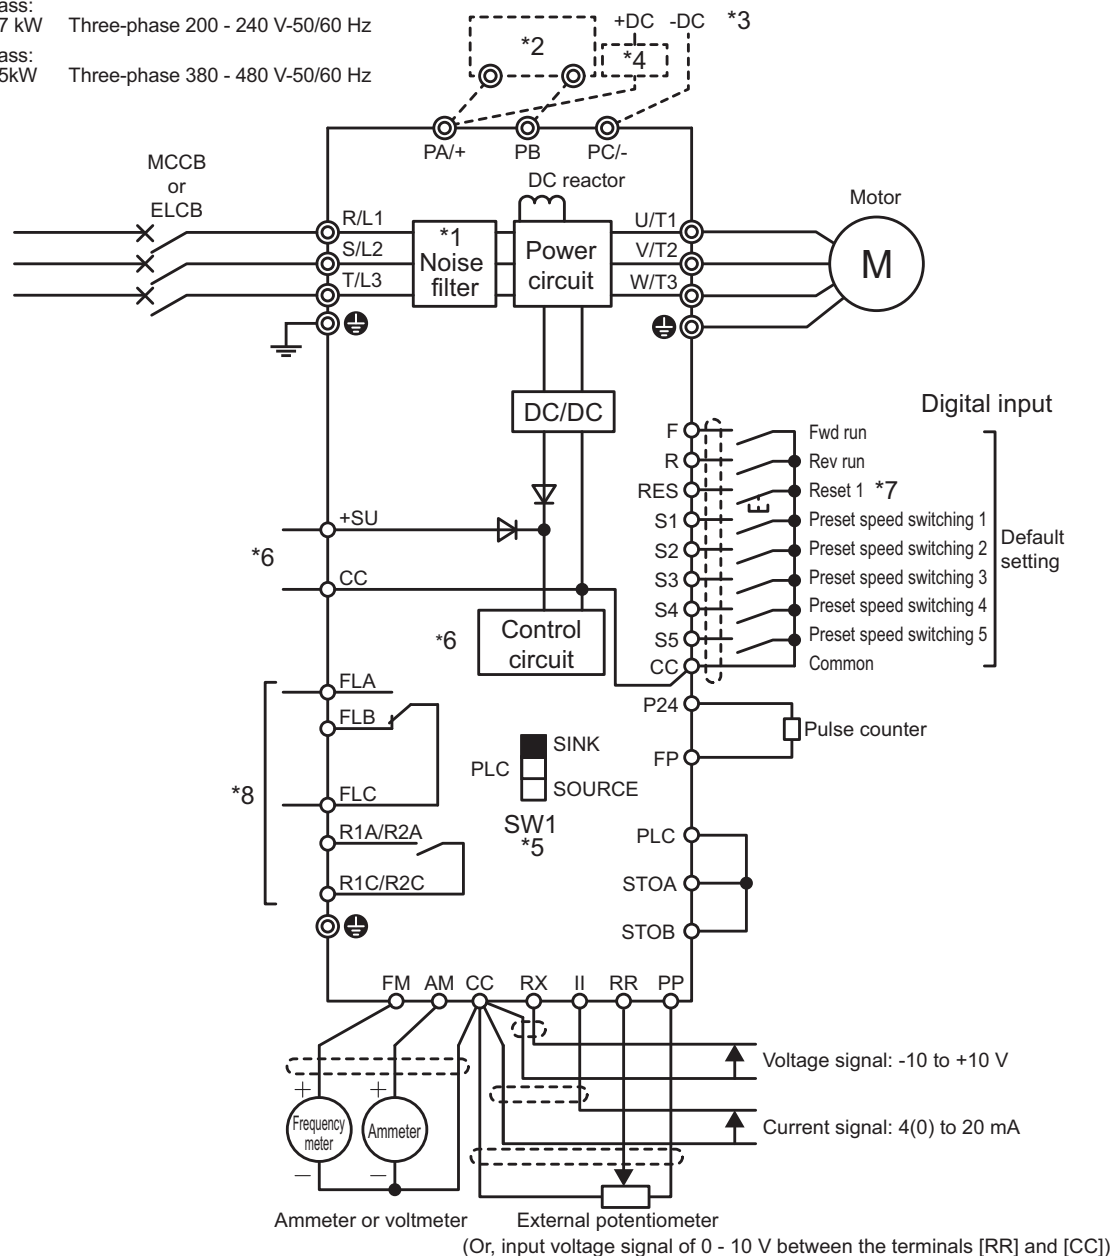

*1 EMC filter is built in 480 V class.

*2 External braking resistor (option).

*3 To supply DC power, connect it to the terminals [PA/+] and [PC/-].

*4 When your inverter is VFAS3-2110P to VFAS3-2370P or VFAS3-4220PC to VFAS3-4750PC with DC power supply, a circuit to suppress an inrush current is required. For detail, refer to application manual "DC power supply connect to inverter" (E6582156).

*5 For the switch function, refer to [2. 3. 5].

*6 To supply control power from an external power supply for backing up the control power supplied from the inverter, an optional control power supply unit (CPS002Z) is required. In this case, it is used in conjunction with the inverter internal power supply.

Set <F647: Control power option failure detection> to back up the control power supply.

For details, refer to [6. 30. 20].

*7 The reset signal is activated by ON→OFF trigger input.

*8 Connect to power to comply with OVC2 (Over Voltage Category 2). Isolation transformer is necessary when connecting to power supply (OVC3).

[Standard connection diagram - Sink]


This diagram shows an example of a standard connection for 240 V class, 45 - 55 kW and 480 V class, 90 - 132 kW (frame size A6).

Power supply

240 V class:
45 - 55 kW Three-phase 200 - 240 V-50/60 Hz

480 V class:
90 - 132 kW Three-phase 380 - 480 V-50/60 Hz

2



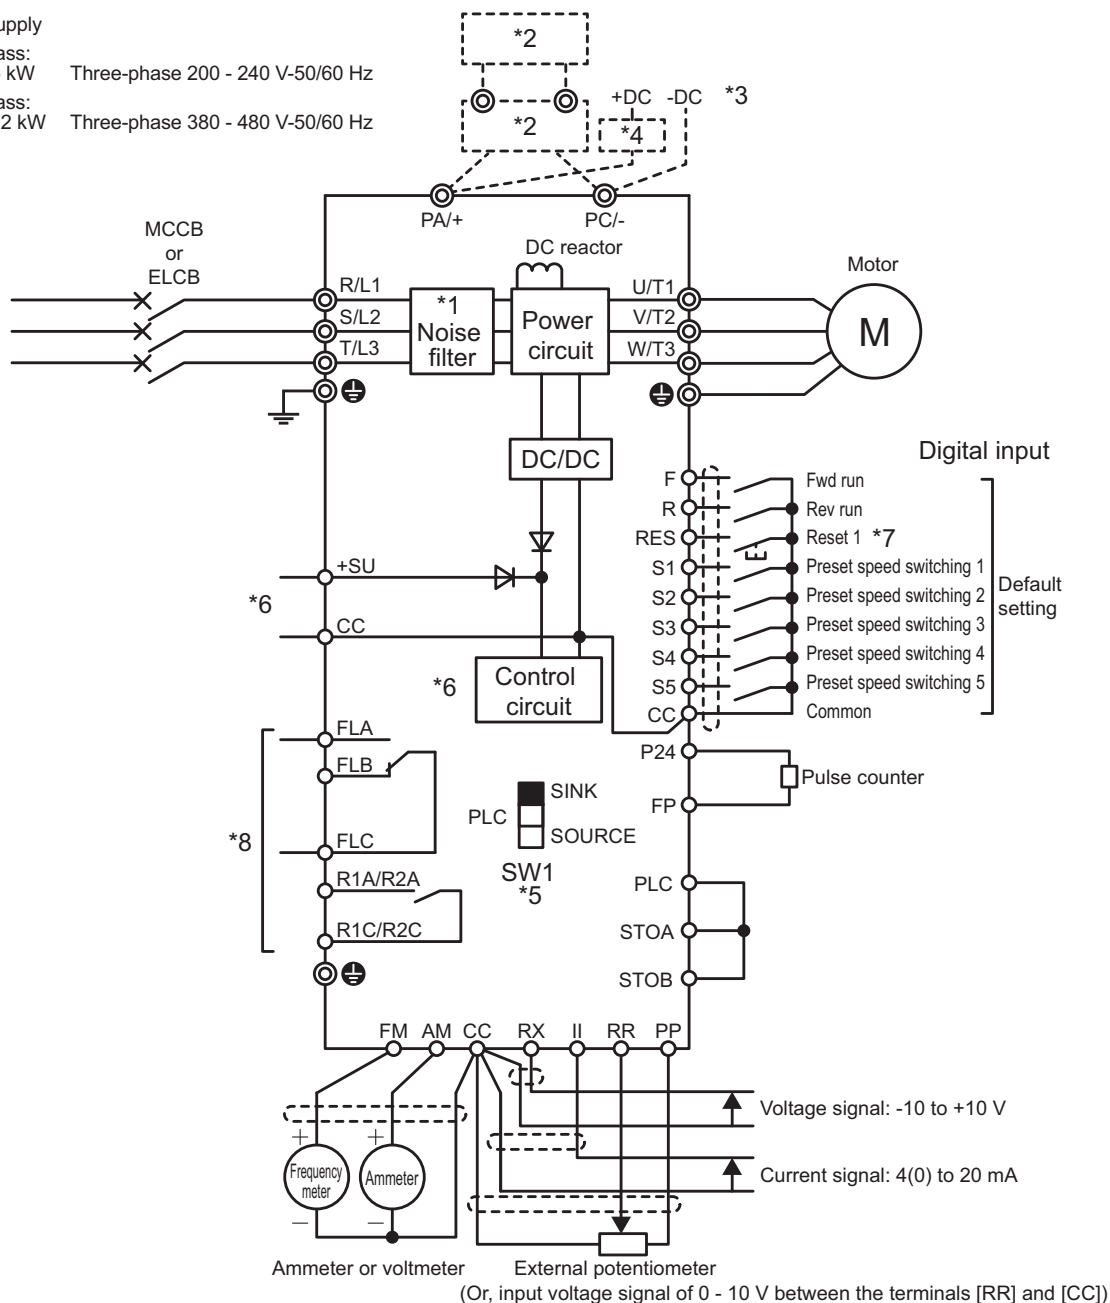


- *1 EMC filter is built in 480 V class.
- *2 When a braking resistor (optional) is mounted, a braking unit (optional) is also required.
- *3 To supply DC power, connect it to the terminals [PA/+] and [PC/-].
- *4 When the inverter is used with a DC power supply, a circuit to suppress an inrush current should be required. For detail, refer to application manual "DC power supply connect to inverter" (E6582156).
- *5 For the switch function, refer to [2. 3. 5].
- *6 To supply control power from an external power supply for backing up the control power supplied from the inverter, an optional control power supply unit (CPS002Z) is required. In this case, it is used in conjunction with the inverter internal power supply.
Set <F647: Control power option failure detection> to back up the control power supply.
For details, refer to [6. 30. 20].
- *7 The reset signal is activated by ON→OFF trigger input.
- *8 Connect to power to comply with OVC2 (Over Voltage Category 2). Isolation transformer is necessary when connecting to power supply (OVC3).

ENCLOSURE NOTES:
- ENVIRONMENTAL RATING: UL TYPE 3R
- PAINT COLOR: WHITE

CONTROL OPTION NOTE:
DEVICE PLACEMENT IS DETERMINED BY THESE
DIGITS OF UNIT PART NUMBER

SLOT 1 (LEFT BOTTOM)
SLOT 2 (LEFT TOP)
SLOT 3 (RIGHT BOTTOM)
SLOT 4 (RIGHT TOP)

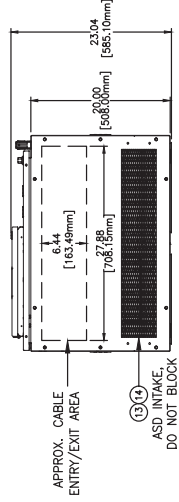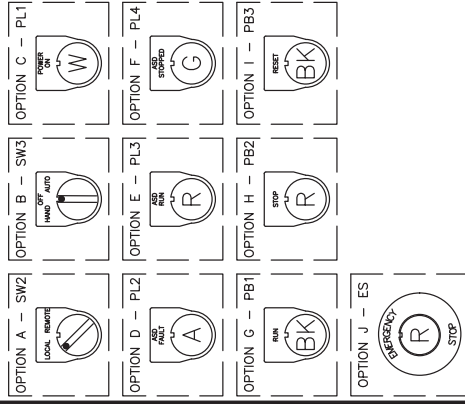

ITEM	DESCRIPTION
1	LIFTING EAR
2	HINGED CONSOLE DOOR
3	SLOTTED 1/4 TURN LATCH
4	CIRCUIT DISCONNECT SWITCH
5	1/4 TURN LATCH, PADLOCK CAPABLE
6	SLOTTED 1/4 TURN LATCH
7	HOLE PLUGS/PILOT DEVICE HOLE
8	LEG STAND
9	MOUNTING TAB
10	LOUVER PANEL
11	MESH FILTER
12	OPERATOR KEYPAD (EOI)
13	EXPENDED METAL/ASD HEATSINK INTAKE
14	MESH FILTER
15	DOOR STOP (INTERNAL)
16	N/A
17	N/A
18	N/A
19	N/A
20	N/A

BOTTOM VIEW W/O LEG STAND KIT

LEG STAND KIT MOUNTING

TOSHIBA TOSHIBA INTERNATIONAL CORPORATION MADE IN HOUSTON, TEXAS U.S.A. THIS MATERIAL IS THE EXCLUSIVE PROPERTY OF TOSHIBA INTERNATIONAL CORPORATION AND SHALL NOT BE REPRODUCED, USED OR DISCLOSED TO OTHERS WITHOUT PRIOR WRITTEN AUTHORIZATION. IS OBTAINED.		TITLE: ENCLOSURE OUTLINE AS3P4(055~075)AA		REVISION: 1 SCALE: 1.0=18.0	
4					
3					
2					
1	09/21/18	REV CTRL OP CODE	E-YANG	SEARY	A-LEUNG
0	05/07/18	FIRST ISSUE	E-YANG	SEARY	A-LEUNG
REV	DATE	DESCRIPTION	BY	CHK	APPR
DRAWING NUMBER:					1808WG20

ENCLOSURE NOTES:
 - ENVIRONMENTAL RATING: UL TYPE 3R
 - PAINT COLOR: WHITE

CONTROL OPTION NOTE:
DEVICE PLACEMENT IS DETERMINED BY THESE
DIGITS OF UNIT PART NUMBER





AS3P4**(/(*K)AA***[**][**][**])

SLOT 1 (LEFT BOTTOM)

SLOT 2 (LEFT TOP)

SLOT 3 (RIGHT BOTTOM)

SLOT 4 (RIGHT TOP)

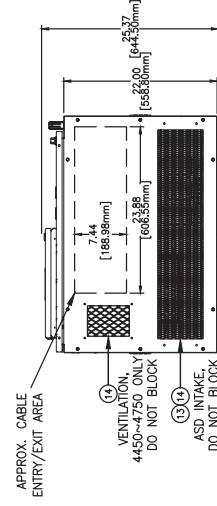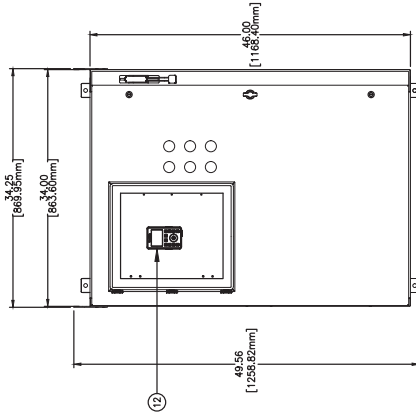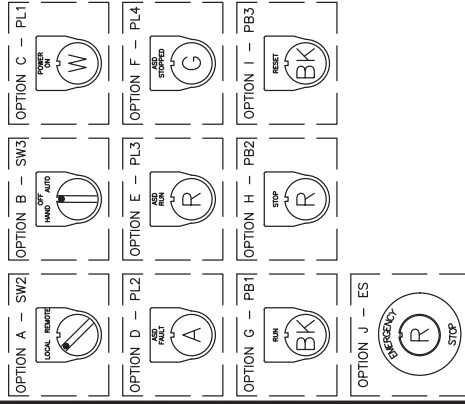

ITEM	DESCRIPTION
1	LIFTING EAR
2	HINGED CONTROL DOOR
3	SLOTTED 1/4 TURN LATCH
4	CIRCUIT DISCONNECT SWITCH
5	1/4 TURN LATCH, PADLOCK CAPABLE
6	SLOTTED 1/4 TURN LATCH
7	HOLE PLUGS/PILOT DEVICE HOLE
8	LEG STAND
9	MOUNTING TAB
10	LOUVER PANEL
11	MESH FILTER
12	OPERATOR KEY/PAD (EOI)
13	EXPENDED METAL/MSD HEATSINK INTAKE
14	MESH FILTER
15	DOOR STOP (INTERNAL)
16	N/A
17	N/A
18	N/A
19	N/A
20	N/A

FRONT OF ENCL W/ FOI SHOWN

LEG STAND KIT MOUNTING

[illegible]

THIS MATERIAL IS THE EXCLUSIVE PROPERTY OF TOSHIBA INTERNATIONAL CORPORATION AND SHALL NOT BE REPRODUCED, USED, OR DISCLOSED TO OTHERS UNLESS PRIOR WRITTEN AUTHORIZATION IS OBTAINED.

TITLE:
ENCLOSURE OUTLINE
AS3P4(110~750)AA

REVISION:	1	SCALE:	1.0=18.0
DRAWING NUMBER:			
1808WG21			

ENCLOSURE NOTES:
— ENVIRONMENTAL RATING: UL TYPE 3R
— PAINT COLOR: WHITE



DIMENSIONS ARE FOR REFERENCE ONLY. IN[mm]

CONTROL OPTION NOTE:
DEVICE PLACEMENT IS DETERMINED BY THESE
DIGITS OF UNIT PART NUMBER


AS3P4**(*/*K)AA***[2][1][2][1]*

SLOT 1 (LEFT BOTTOM)
SLOT 2 (LEFT TOP)
SLOT 3 (RIGHT BOTTOM)
SLOT 4 (RIGHT TOP)


OPTIONAL 30mm CONTROL DEVICE DETAILS

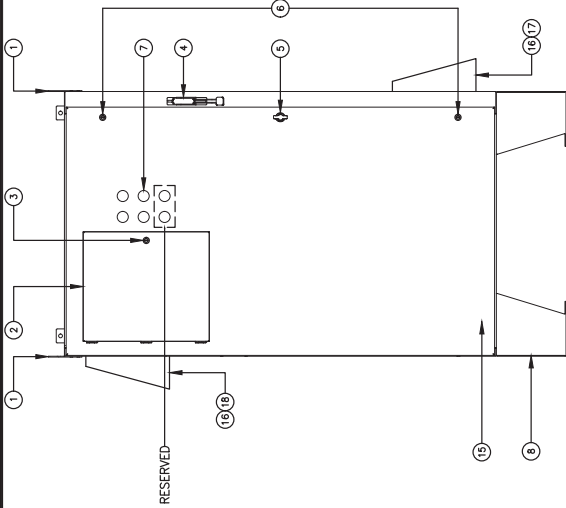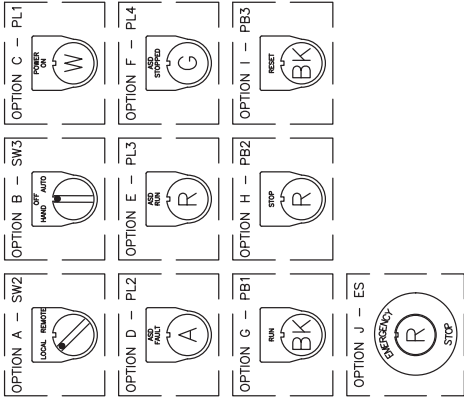


FRONT VIEW

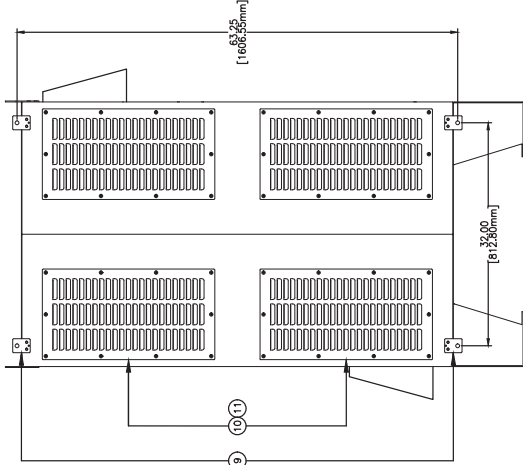


REAR VIEW

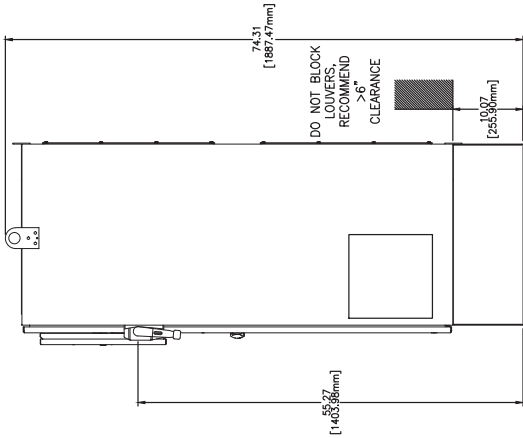

RIGHT SIDE VIEW

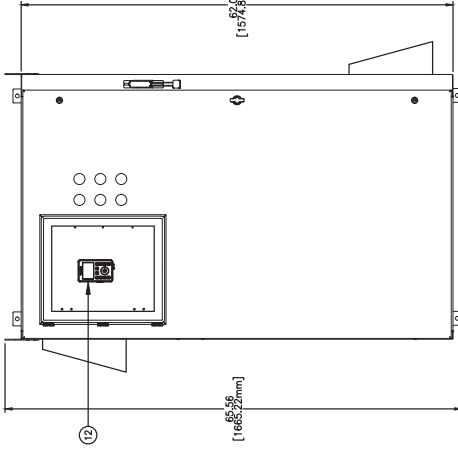

FRONT OF ENCL. W/ EOL SHOWN

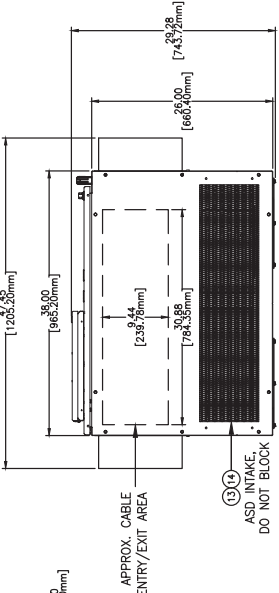

BOTTOM VIEW

ITEM	DESCRIPTION
1	LIFTING EAR
2	HINGED CONTROL DOOR
3	SLOTTED 1/4 TURN LATCH
4	CIRCUIT DISCONNECT SWITCH
5	1/4 TURN LATCH, PADLOCK CAPABLE
6	SLOTTED 1/4 TURN LATCH
7	HOLE PLUGS/PILOT DEVICE HOLE
8	LEG STAND
9	MOUNTING TAB
10	LOUVER PANEL
11	MESH FILTER
12	OPERATOR KEYPAD (EOI)
13	EXPENDED METAL/ASD HEATSINK INTAKE
14	MESH FILTER
15	DOOR STOP (INTERNAL)
16	FAN SHROUD
17	FILTERED INTAKE FAN
18	FILTERED EXHAUST
19	N/A
20	N/A

TITLE:

ENCLOSURE OUTLINE
AS3P4(900~132K)AA

REVISION:

1

SCALE:

1.0=18.0

TOSHIBA
TOSHIBA INTERNATIONAL CORPORATION
MADE IN HOUSTON, TEXAS U.S.A.

THIS MATERIAL IS THE EXCLUSIVE PROPERTY OF
TOSHIBA INTERNATIONAL CORPORATION AND SHALL
NOT BE REPRODUCED, USED, OR DISCLOSED TO OTHERS
UNLESS PRIOR WRITTEN AUTHORIZATION IS OBTAINED.

4

3

2

1

0

REV

08/21/18

REV CTRL OP CODE

05/07/18

FIRST ISSUE

BY

CHK

APPR

DATE

DESCRIPTION

DRAWING NUMBER:

1808WG22