
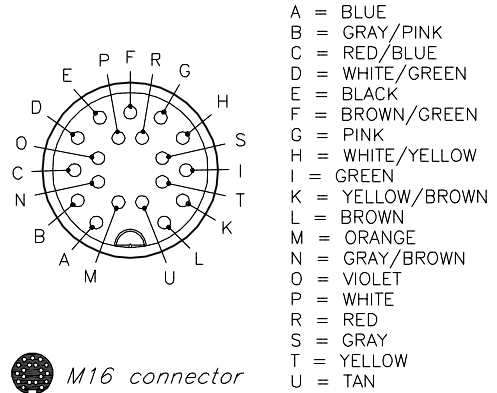
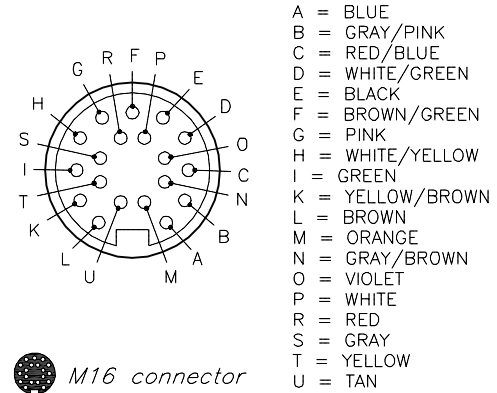


MALE END VIEW		FEMALE END VIEW		SPECIFICATIONS	
 M16 connector		 M16 connector		CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
				MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	3.0 A
				RATED VOLTAGE [V]	30 VAC/VDC
				OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	19x22 AWG
				DRAIN/SHIELD	24 AWG DRAIN/POLYESTER FOIL SHIELD
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS IEC IP67

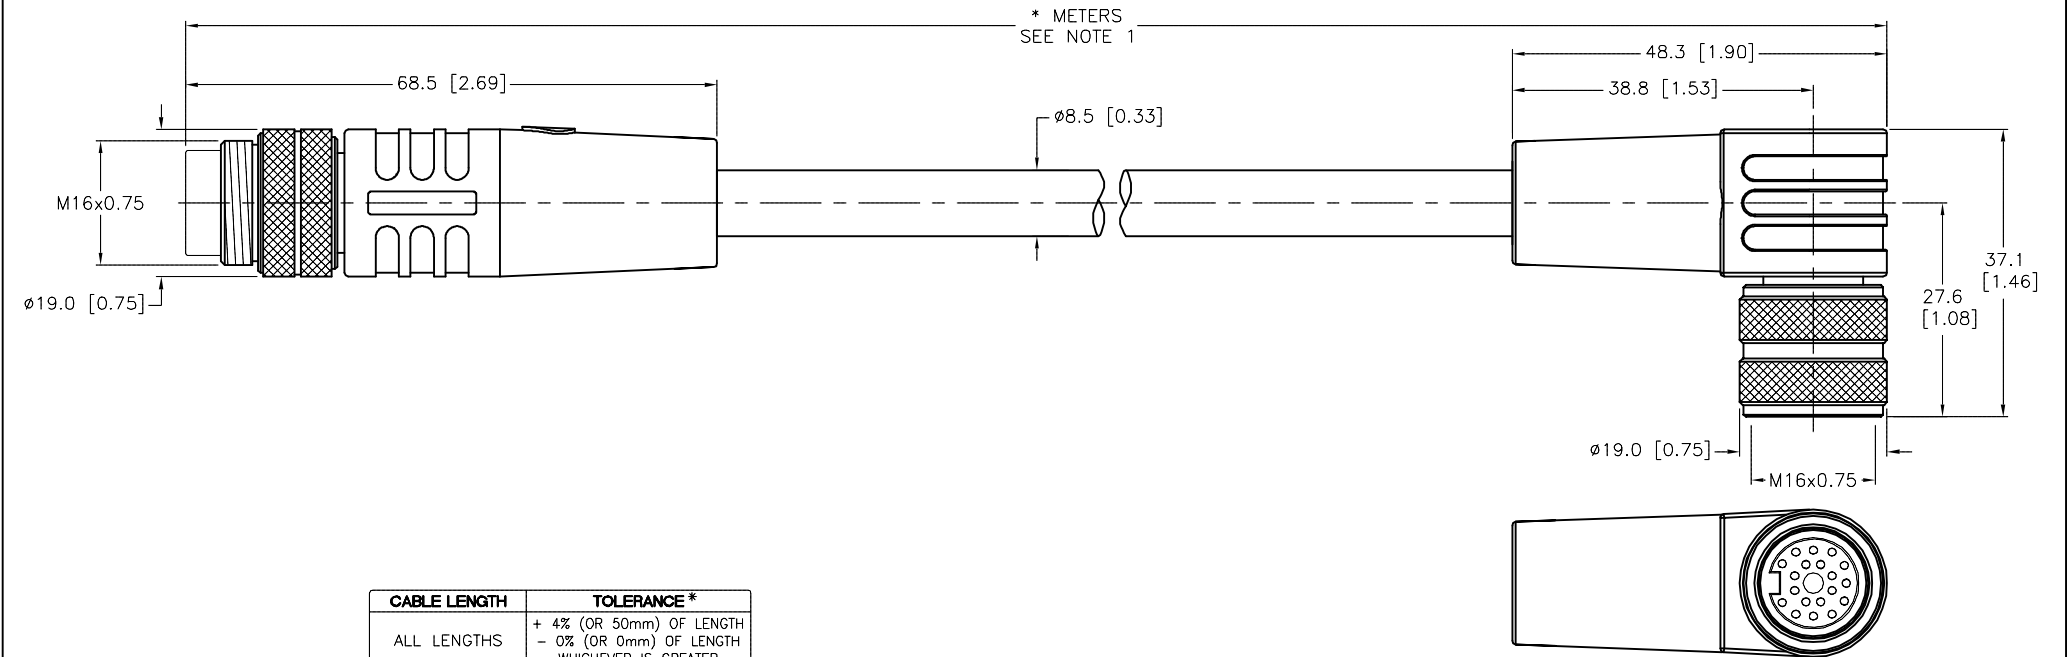

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.						DRFT RWC		DATE 10/08/08	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.0	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS				MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		BSM BKWM 19-995-*	
SEE SPECIFICATIONS								IDENTIFICATION NO.	
								REV	
								D	
D REMOVE FINS FROM MOLDED BODIES				RDS 03/09/15 49222					
REV DESCRIPTION				BY DATE ECO NO.				FILE: 777009954	
								SHEET 1 OF 1	