


BLK,PVC,7X24,S-DF,AWM

General Purpose Cable – Reelfast™ Bulk Cable

Features



- UL/CSA AWM 300V
- General Purpose Cable
- Black PVC jacket, shielded, 7X24 AWG
- -40 Cold Bend Rating
- Flame Ratings: UL1061, CSA FT1

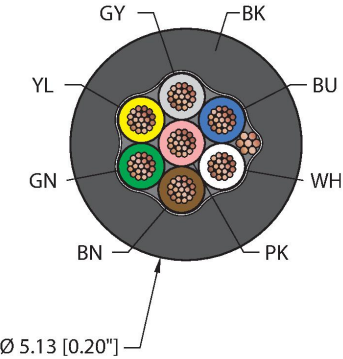

Technical data

Type	BLK,PVC,7X24,S-DF,AWM
ID no.	RF50761
Cable data	
Cable Platform	General Purpose Cable
Total number of conductors	7
Cable diameter	Ø 5.13 mm
Cable jacket	PVC, Black
Shield	Aluminum/polyester (IN)
Cable drain	26 AWG, TC (Tinned Copper)
Conductor diameter	0.044 "
Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	7 x 24 AWG [Similar to 0.25 mm²]
Number of strands x O.D.	19 x 36 AWG
Conductor colors	PK, YL, GY, BU, WH, BN, GN
Weight	0.092 lbs. /meter
Electrical properties at +20 °C	
Voltage	UL/CSA AWM 300V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	25.67 Ω/1000ft max.
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 15 x Ø

BLK,PVC,7X24,S-DF,AWM| 11/11/2021 16-14 | technical changes reserved

Technical data

Cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+105 °C
Ambient temperature range (dynamic)	-40 °C...+105 °C
Temperature range (installation)	-20 °C...+105 °C
Approval	
UL Approvals	UL 758 AWM 2517
CSA Approvals	CSA AWM I/II A/B CSA FT1
Compliances	RoHS
Note	
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.