


500[®] & 700[®] SERIES RACEWAY

500 Series Wire Fill Capacities For Communications


	CABLE/WIRE SIZE	O.D. (APPROX. DIA.)		40% FILL
		Inches	(mm)	
UNSHIELDED TWISTED PAIR	4-pair, 24 AWG, Cat 3	0.190	(4.8)	2
	4-pair, 24 AWG, Cat 5e	0.210	(5.3)	2
	4-pair, 24 AWG, Cat 6	0.250	(6.3)	1
	4-pair, 24 AWG, Cat 6a*	0.354	(9.0)	0
	25-pair, 24 AWG	0.410	(10.4)	0
COAXIAL	RG6/U	0.270	(6.9)	1
FIBER	ZipCord	0.118 x 0.236	(3 x 6)	2
	Round 4 Strand Fiber	0.187	(4.8)	2
	Round 6 Strand Fiber	0.256	(6.5)	1

500 Series Raceway Ordering Information


V500 One-Piece Raceway

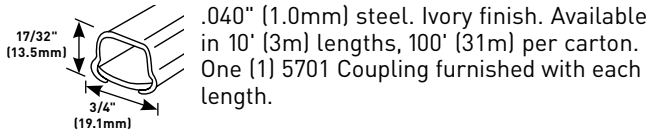

V500-5 One-Piece Raceway

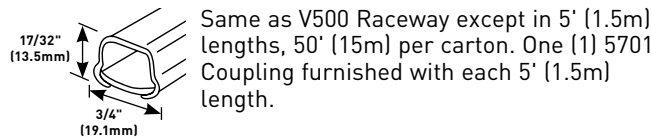


605 500 Series Raceway Cutter




605K Replacement Blades

Case hard steel replacement blades for 605 Raceway Cutter.

502 Bushing



V504 Mounting Strap

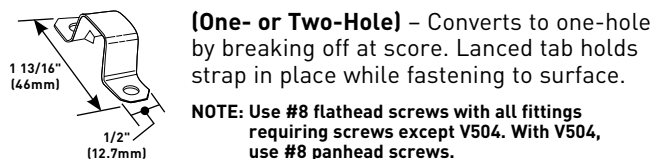


500 Series Wire Fill Capacities for Power

WIRE SIZE	O.D.		NO. OF CONDUCTORS 40% FILL
	Inches	(mm)	
14 AWG	0.111	(2.8)	7
12 AWG	0.130	(3.3)	5
10 AWG	0.164	(4.2)	3

NOTE: For additional information, refer to the Technical Section.


* Category 6 augmented (6a) cable for 10 gigabit ethernet – max allowed cable diameter per addenda No. 11 ANSI TIA/EIA 568-B.2.

V506 Connection Cover




Covers seam where two lengths of 500 Series Raceway come together.

V511 Flat Elbow




Right angle turns on the same surface.

V512 45° Flat Elbow




Diagonal 45° turns on same surface.

V517 Internal Elbow



Inside right angle turns.

V518 Outside Elbow




Outside right angle turns.

5700LL Laser Level



For 500/700 Series Raceway. Attaches to outlet box base and raceway fittings for perfect alignment of runs of raceway.

5700CG Cutting Guide



For 500/700 Series Raceway. Attaches to step ladder and holds raceway channel securely for accurate cuts.