

M-11906 2

GENERAL INFORMATION


WIRE LOCATION	WIRE	WIRE COLOR	WIRE SIZE (AWG)
1	-	-	-
2	-	-	-
3	GROUND (G)	GREEN	#12
4	-	-	-
5	NEUTRAL (N1)	WHITE	#12
6	LINE (L1)	BLACK	#12
7	-	-	-
8	-	-	-

NOTES:

1. RATING: 20A 120/208 V.
2. ALL DIMENSIONS ARE IN INCHES [mm] EXCEPT THE FLEXIBLE METAL CONDUIT LENGTH IN FOOT.

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
FEMALE CONNECTOR	THERMOPLASTIC	BLACK
CONDUIT	GALV. STEEL	
CLAMP	STEEL	ZINC PLATE
RIVET	STEEL	ZINC PLATE
INSULATOR	THERMOPLASTIC	
WIRE	COPPER	
FITTING	CAST. ALUM.	

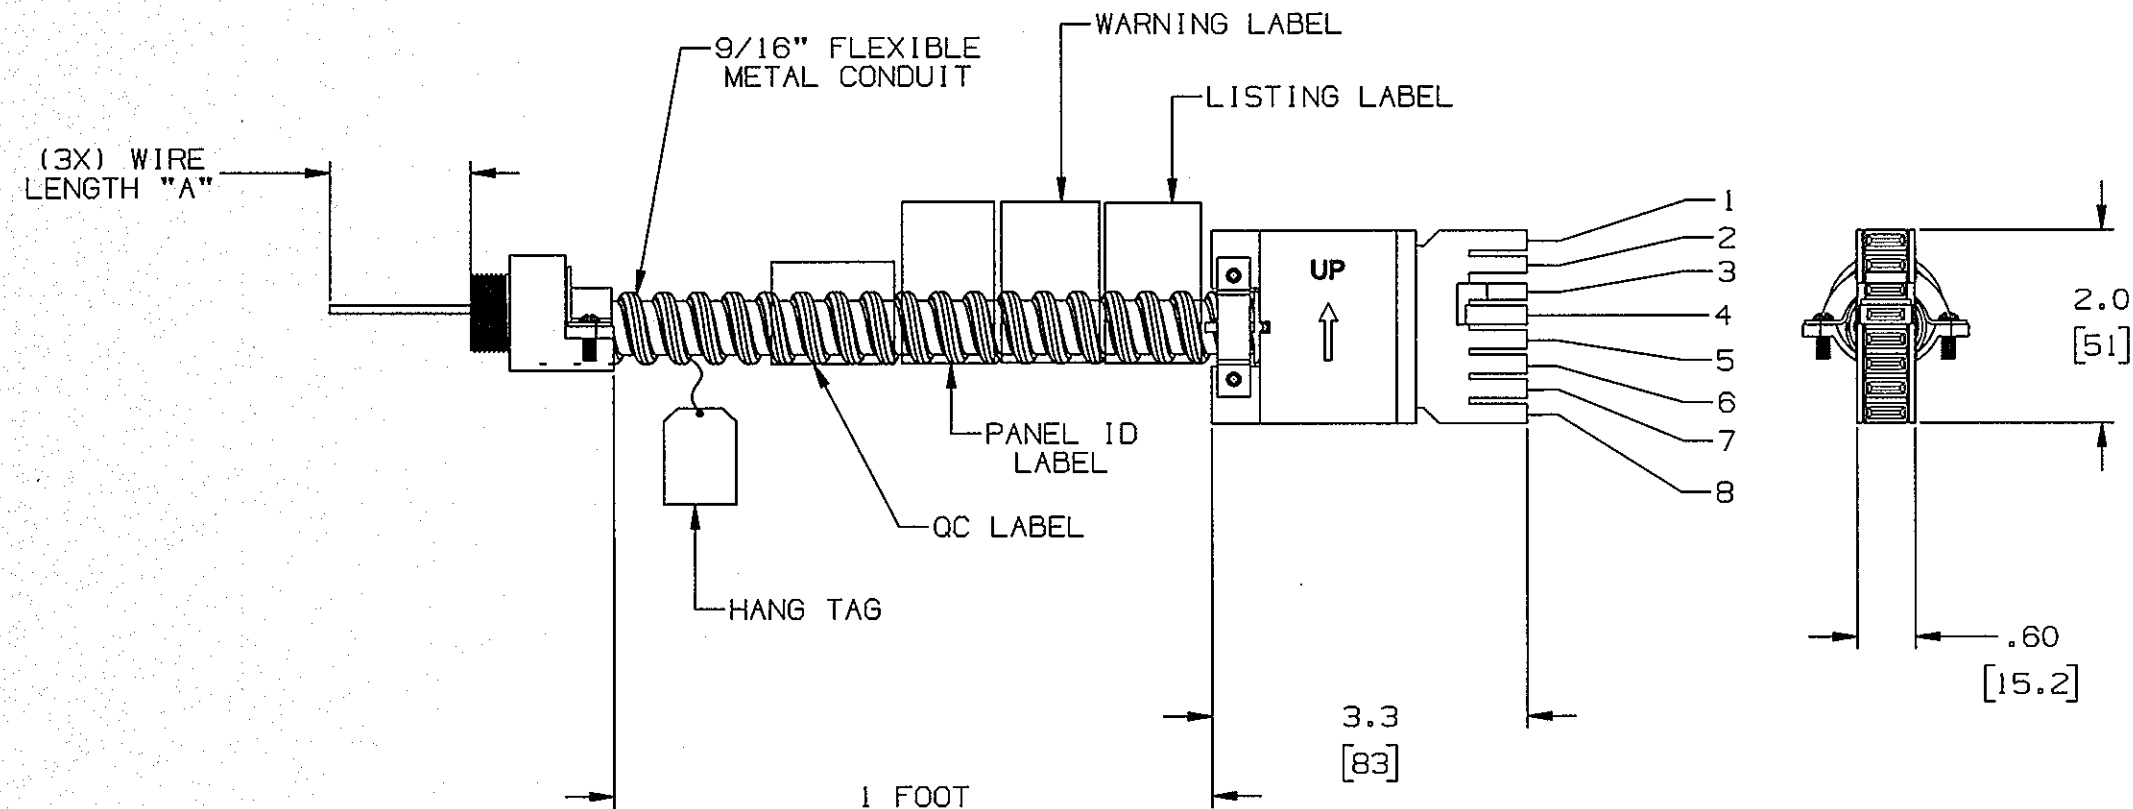

CATALOG NUMBER	DESCRIPTION	"A" LENGTH
CEXT111FWL01	EXT CABLE. 1/1/1 (1 HOT, 1 NEUTRAL, 1 GROUND) FEMALE TO OPEN	12"
CEXT111FWL01XP		18"

TITLE
MODULAR WIRING
EXTENDER CABLE 1/1/1
FEMALE TO OPEN WIRE

TOLERANCES UNLESS
OTHERWISE SPECIFIED
.XX = ±.01
.XXX = ±.005
ANGLES = ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT
DR. BY DMP APP. BY
TR. BY SCALE NONE
CHK. BY DATE 2/3/11

DIMENSION SHEET FOR CAT. NO. SEE TABLE REPAIRABLE ☐ NON-REPAIRABLE ☒ B M-11906 2