
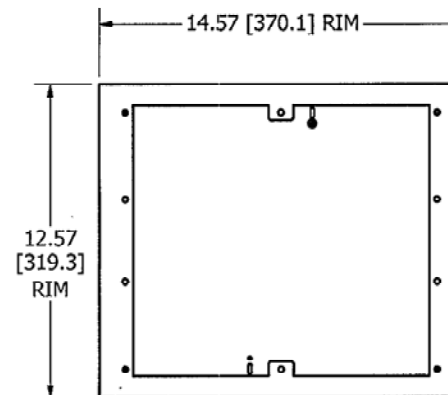



2



1. ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
2. COMPLIES WITH UL 514A.
3. COVER LOAD CAPACITY: 20,000 LB. WITH 2X SAFETY FACTOR
4. COMPATIBLE WITH CFB8FC2 FLOOR BOX ONLY, SOLD SEPARATELY.

LIST OF PARTS

[illegible]

2	TITLE REVISED PER DCN 19127	SBW	10/2/12
1	INITIAL RELEASE PER DCN18661	SBW	3/5/12
SYM	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
JUNCTION BOX COVER FOR USE WITH
8 GANG CONFIGURABLE FLOOR BOX
CFB8FC2

TOLERANCES UNLESS OTHERWISE SPECIFIED $.XX = \pm .01$ $.XXX = \pm .005$ ANGLES = $\pm 2^\circ$	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT.	
	DR. BY	APP. BY
	TR. BY	SCALE 1/5
	CHK'D BY SM	DATE 3/5/2012

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-11565

2