

Twist-Lock® Devices
20A, 277V AC, 2 Pole, 3 Wire Grounding
Valise® Plug

HUBBELL



Features

- Powerful cord grip prevents conductor slippage and strain on wiring terminals
- Totally insulated impact and crush resistant nylon body
- Unique patented clamp type terminals provide a superior electrical connection by bundling the conductor strands when clamps are tightened

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black Nylon.	.325"-.720" (8.26-18.3)	783585043081	HBL2331VBK

Listings

Listed to UL 498
Fed.Spec. W-C-596
Certified to CSA C22.2 No.42

Specifications

Housing	Black nylon
Blades	Brass
Terminal Screws	#8 - 32 Steel (Philips / Slotted / Robertson)
Terminal Clamps	Steel - Nickel plated
Clamp Screws	#8 - 32 Steel - Zinc plated (Philips / Slotted / Robertson)


Performance

Electrical	
Current Interrupting	Certified for full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accommodation	#18 AWG - #10 AWG stranded copper wire only.

Environmental	
Flammability	HB or better per UL 94 or CSA 22.2 No. 0.6
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)
Terminal Identification	Terminals identified in accordance with UL 498



20A 277V AC
NEMA L7-20P
UL/CSA
2 HP

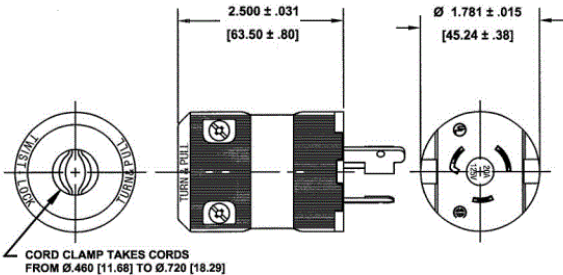

Accessories

Connector	HBL2333VBK
Single Receptacle	HBL2330
Flanged Receptacle	HBL2336
Weatherproof Boot	HBL60CM31V

Resources

Customer Use Drawing
eCatalog

