



CONTINUOUS HINGE WITH CLAMPS, TYPE 4X



2

INDUSTRY STANDARDS

UL 508A Listed; Type 3R, 4, 4X, 12; File No. E61997
cUL Listed per CSA C22.2 No 94; Type 3R, 4, 4X, 12; File No. E61997

NEMA/EEMAC Type 3, 3R, 4, 4X, 12, 13
CSA File No. 42186: Type 4, 4X, 12
IEC 60529, IP66
Meets NEMA Type 3RX requirements

APPLICATION

For use in indoor and outdoor corrosive environments that require a water-tight seal, this enclosure's seamless foam-in-place gasket and screw-down clamps provide a secure seal against contaminants.

SPECIFICATIONS

- 14 gauge Type 304 or Type 316L stainless steel bodies and doors
- Seams continuously welded and ground smooth
- Seamless foam-in-place gasket
- Rolled lip around three sides of door
- Stainless steel door clamp assembly
- Hasp and staple for padlocking
- Door removed by pulling stainless steel continuous hinge pin
- Data pocket is high-impact thermoplastic
- Collar studs provided for mounting optional panels
- Exterior hardware on Type 316L stainless steel enclosures matches enclosure material
- Bonding provision on door; grounding stud on body

FINISH

Door, sides, top and bottom have smooth #4 brushed finish.

ACCESSORIES

Fast-Operating Clamp Assembly, page 1371
Panels for Type 3R, 4, 4X, 12 and 13 Enclosures, page 1334
Junction Box and Wall-Mount Enclosure Swing-Out Panel Kit, page 1332
Steel, Stainless Steel and Non-Metallic Window Kits, page 1346
H2OMIT Vent Drains, Type 4X, page 1322
H2OMIT Thermoelectric Dehumidifier, page 1324
PANELITE Enclosure Lights, page 1393
HOL-SEALERS Hole Seals, page 1374
Thermoelectric Coolers Indoor/Outdoor, page 1142



MODIFICATION AND CUSTOMIZATION

Hoffman excels at modifying and customizing products to your specifications. Contact your local Hoffman sales office or distributor for complete information.

BULLETIN: A4S

Standard Product

Catalog Number	AxBxC in./mm	Stainless Steel Type	Steel Panel	Conductive Steel Panel	Stainless Steel Panel	Panel Size D x E in./mm	F in./mm	Clamps Qty.	Data Pocket
A16H1206SSLP	16.00 x 12.00 x 6.00 406 x 305 x 152	304	A16P12	A16P12G	A16P12SS6	13.00 x 9.00 330 x 229	1.25 32	4	Small
A16H1206SS6LP	16.00 x 12.00 x 6.00 406 x 305 x 152	316L	A16P12	A16P12G	A16P12SS6	13.00 x 9.00 330 x 229	1.25 32	4	Small
A16H1606SSLP	16.00 x 16.00 x 6.00 406 x 406 x 152	304	A16P16	A16P16G	A16P16SS6	13.00 x 13.00 330 x 330	3.00 76	4	Small
A16H1606SS6LP	16.00 x 16.00 x 6.00 406 x 406 x 152	316L	A16P16	A16P16G	A16P16SS6	13.00 x 13.00 330 x 330	3.00 76	4	Small
A16H2006SSLP	16.00 x 20.00 x 6.00 406 x 508 x 152	304	A20P16	A20P16G	A20P16SS6	17.00 x 13.00 432 x 330	3.00 76	4	Small
A16H2006SS6LP	16.00 x 20.00 x 6.00 406 x 508 x 152	316L	A20P16	A20P16G	A20P16SS6	17.00 x 13.00 432 x 330	3.00 76	4	Small
A20H1606SSLP	20.00 x 16.00 x 6.00 508 x 406 x 152	304	A20P16	A20P16G	A20P16SS6	17.00 x 13.00 432 x 330	3.00 76	4	Small
A20H1606SS6LP	20.00 x 16.00 x 6.00 508 x 406 x 152	316L	A20P16	A20P16G	A20P16SS6	17.00 x 13.00 432 x 330	3.00 76	4	Small
A20H2006SSLP	20.00 x 20.00 x 6.00 508 x 508 x 152	304	A20P20	A20P20G	A20P20SS6	17.00 x 17.00 432 x 432	3.00 76	4	Small
A20H2006SS6LP	20.00 x 20.00 x 6.00 508 x 508 x 152	316L	A20P20	A20P20G	A20P20SS6	17.00 x 17.00 432 x 432	3.00 76	4	Small
A24H2006SSLP	24.00 x 20.00 x 6.00 610 x 508 x 152	304	A24P20	A24P20G	A24P20SS6	21.00 x 17.00 533 x 432	3.00 76	5	Small
A24H2006SS6LP	24.00 x 20.00 x 6.00 610 x 508 x 152	316L	A24P20	A24P20G	A24P20SS6	21.00 x 17.00 533 x 432	3.00 76	5	Small
A24H2406SSLP	24.00 x 24.00 x 6.00 610 x 610 x 152	304	A24P24	A24P24G	A24P24SS6	21.00 x 21.00 533 x 533	3.00 76	5	Small
A24H2406SS6LP	24.00 x 24.00 x 6.00 610 x 610 x 152	316L	A24P24	A24P24G	A24P24SS6	21.00 x 21.00 533 x 533	3.00 76	5	Small

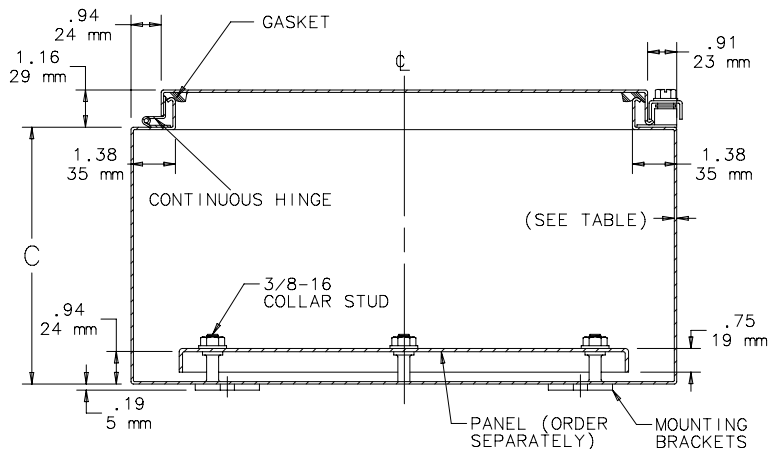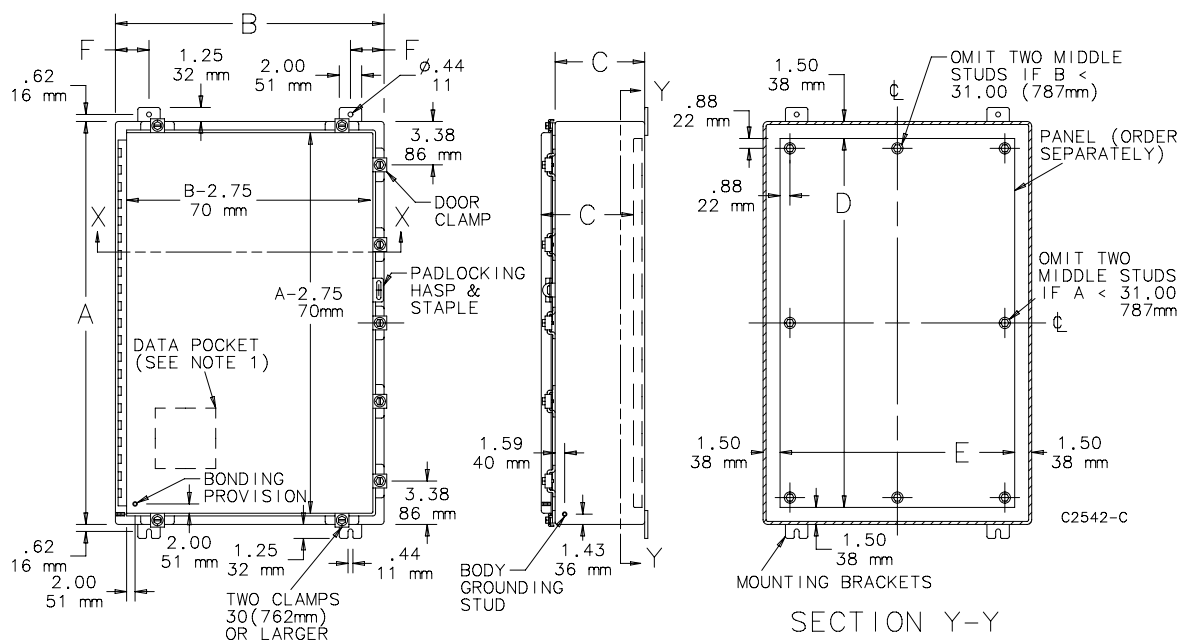

NOTE:

1. Removable data pocket included (see table for size). Large data pocket 12.00 x 12.00 (305mm x 305mm); small data pocket 6.00 x 6.00 (152mm x 152mm).
2. Maximum spacing between door clamps is 15.00 (382mm).

SECTION X-X