

## CLEAN TRAY STAINLESS STEEL CABLE TRAY, TYPE 1



### INDUSTRY STANDARDS

UL Classified; File No. E263414

This product is classified as to its suitability as an equipment grounding conductor only.

NEMA/EEMAC Type 1

### APPLICATION

The CLEAN TRAY Stainless Steel Cable Tray is designed to protect rated cabling in applications that require frequent washdown. A variety of sloped-top fittings with front, inside or outside cover options allows for highly-customized runs using standard catalog product and supports directional control of washdown effluence.

### FEATURES


- Adjustable dividers
- Tops and sides can completely open
- Flat cover and 20-degree sloped cover models available
- Perforated fittings and straight sections
- Elbows contain three cover options: front, inside and outside
- Connecting hardware is included with each model
- Quarter-turn latches

### SPECIFICATIONS

- 18 gauge stainless steel

### FINISH

Smooth brushed finish

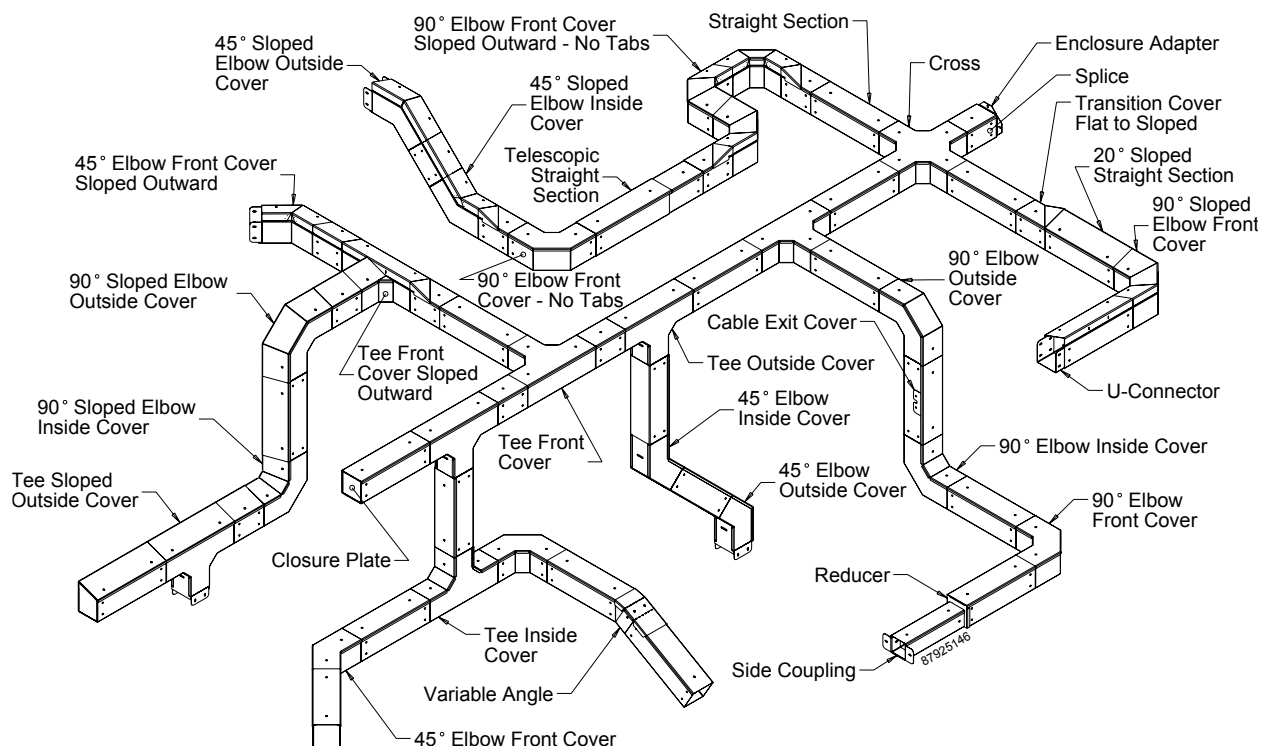


U-CONNECTOR



Used to connect two straight sections.  
BULLETIN: F23

| Catalog Number | AxB in./mm               |
|----------------|--------------------------|
| CT22UCSS       | 2.00 x 2.00<br>51 x 51   |
| CT33UCSS       | 3.00 x 3.00<br>76 x 76   |
| CT44UCSS       | 4.00 x 4.00<br>102 x 102 |
| CT46UCSS       | 4.00 x 6.00<br>102 x 152 |
| CT66UCSS       | 6.00 x 6.00<br>152 x 152 |




87925155

CLOSURE PLATE



Closes the end of a cable tray section or run. Available with 20-degree slope in some sizes (left slope shown).  
BULLETIN: F23

| Catalog Number | AxB in.     | AxB mm    | Description  | K (in.) | K (mm) |
|----------------|-------------|-----------|--------------|---------|--------|
| CT22CPSS       | 2.00 x 2.00 | 51 x 51   | Standard     | —       | —      |
| CT33CPSS       | 3.00 x 3.00 | 76 x 76   | Standard     | —       | —      |
| CT44CPSS       | 4.00 x 4.00 | 102 x 102 | Standard     | —       | —      |
| CT46CPSS       | 4.00 x 6.00 | 102 x 152 | Standard     | —       | —      |
| CT66CPSS       | 6.00 x 6.00 | 152 x 152 | Standard     | —       | —      |
| CTS33CPRSS     | 3.00 x 3.00 | 76 x 76   | Sloped Right | 1.06    | 27     |
| CTS33CPLSS     | 3.00 x 3.00 | 76 x 76   | Sloped Left  | 1.06    | 27     |
| CTS44CPRSS     | 4.00 x 4.00 | 102 x 102 | Sloped Right | 1.42    | 36     |
| CTS44CPLSS     | 4.00 x 4.00 | 102 x 102 | Sloped Left  | 1.42    | 36     |
| CTS46CPRSS     | 4.00 x 6.00 | 102 x 152 | Sloped Right | 2.16    | 55     |
| CTS46CPLSS     | 4.00 x 6.00 | 102 x 152 | Sloped Left  | 2.16    | 55     |
| CTS66CPRSS     | 6.00 x 6.00 | 152 x 152 | Sloped Right | 2.16    | 55     |
| CTS66CPLSS     | 6.00 x 6.00 | 152 x 152 | Sloped Left  | 2.16    | 55     |




87925156

ENCLOSURE ADAPTER



Allows the cable tray to be securely connected to an enclosure.  
BULLETIN: F23

| Catalog Number | AxB in./mm               |
|----------------|--------------------------|
| CT22AESS       | 2.00 x 2.00<br>51 x 51   |
| CT33AESS       | 3.00 x 3.00<br>76 x 76   |
| CT44AESS       | 4.00 x 4.00<br>102 x 102 |
| CT46AESS       | 4.00 x 6.00<br>102 x 152 |
| CT66AESS       | 6.00 x 6.00<br>152 x 152 |



87925157