

CONTINUOUS HINGE WITH CLAMPS, TYPE 4X



INDUSTRY STANDARDS

UL 508A Listed; Type 3R, 4, 4X, 12; File No. E61997
cUL Listed per CSA C22.2 No 94; Type 3R, 4, 4X, 12; File No. E61997

NEMA/EEMAC Type 3, 3R, 4, 4X, 12, 13
CSA File No. 42186: Type 4, 4X, 12
IEC 60529, IP66
Meets NEMA Type 3RX requirements

APPLICATION

For use in indoor and outdoor corrosive environments that require a water-tight seal, this enclosure's seamless foam-in-place gasket and screw-down clamps provide a secure seal against contaminants.

SPECIFICATIONS

- 14 gauge Type 304 or Type 316L stainless steel bodies and doors
- Seams continuously welded and ground smooth
- Seamless foam-in-place gasket
- Rolled lip around three sides of door
- Stainless steel door clamp assembly
- Hasp and staple for padlocking
- Door removed by pulling stainless steel continuous hinge pin
- Data pocket is high-impact thermoplastic
- Collar studs provided for mounting optional panels
- Exterior hardware on Type 316L stainless steel enclosures matches enclosure material
- Bonding provision on door; grounding stud on body

FINISH

Door, sides, top and bottom have smooth #4 brushed finish.

ACCESSORIES

Fast-Operating Clamp Assembly
Panels for Type 3R, 4, 4X, 12 and 13 Enclosures
Junction Box and Wall-Mount Enclosure Swing-Out Panel Kit
Steel, Stainless Steel and Non-Metallic Window Kits
H2OMIT Vent Drains, Type 4X
H2OMIT Thermoelectric Dehumidifier
Steel, Stainless Steel and Non-Metallic Window Kits
PANELITE Enclosure Lights
Hol-Sealers Hole Seals
Thermoelectric Temperature Controller



MODIFICATION AND CUSTOMIZATION

Hoffman excels at modifying and customizing products to your specifications. Contact your local Hoffman sales office or distributor for complete information.

BULLETIN: A4S

Standard Product

Catalog Number	AxBxC in./mm	Stainless Steel Type	Steel Panel	Conductive Steel Panel	Stainless Steel Panel	Panel Size D x E in./mm	F in./mm	Clamps Qty.	Data Pocket
A16H1206SSLP	16.00 x 12.00 x 6.00 406 x 305 x 152	304	A16P12	A16P12G	A16P12SS6	13.00 x 9.00 330 x 229	1.25 32	4	Small
A16H1206SS6LP	16.00 x 12.00 x 6.00 406 x 305 x 152	316L	A16P12	A16P12G	A16P12SS6	13.00 x 9.00 330 x 229	1.25 32	4	Small
A16H1606SSLP	16.00 x 16.00 x 6.00 406 x 406 x 152	304	A16P16	A16P16G	A16P16SS6	13.00 x 13.00 330 x 330	3.00 76	4	Small
A16H1606SS6LP	16.00 x 16.00 x 6.00 406 x 406 x 152	316L	A16P16	A16P16G	A16P16SS6	13.00 x 13.00 330 x 330	3.00 76	4	Small
A16H2006SSLP	16.00 x 20.00 x 6.00 406 x 508 x 152	304	A20P16	A20P16G	A20P16SS6	17.00 x 13.00 432 x 330	3.00 76	4	Small
A16H2006SS6LP	16.00 x 20.00 x 6.00 406 x 508 x 152	316L	A20P16	A20P16G	A20P16SS6	17.00 x 13.00 432 x 330	3.00 76	4	Small
A20H1606SSLP	20.00 x 16.00 x 6.00 508 x 406 x 152	304	A20P16	A20P16G	A20P16SS6	17.00 x 13.00 432 x 330	3.00 76	4	Small
A20H1606SS6LP	20.00 x 16.00 x 6.00 508 x 406 x 152	316L	A20P16	A20P16G	A20P16SS6	17.00 x 13.00 432 x 330	3.00 76	4	Small
A20H2006SSLP	20.00 x 20.00 x 6.00 508 x 508 x 152	304	A20P20	A20P20G	A20P20SS6	17.00 x 17.00 432 x 432	3.00 76	4	Small
A20H2006SS6LP	20.00 x 20.00 x 6.00 508 x 508 x 152	316L	A20P20	A20P20G	A20P20SS6	17.00 x 17.00 432 x 432	3.00 76	4	Small
A24H2006SSLP	24.00 x 20.00 x 6.00 610 x 508 x 152	304	A24P20	A24P20G	A24P20SS6	21.00 x 17.00 533 x 432	3.00 76	5	Small
A24H2006SS6LP	24.00 x 20.00 x 6.00 610 x 508 x 152	316L	A24P20	A24P20G	A24P20SS6	21.00 x 17.00 533 x 432	3.00 76	5	Small
A24H2406SSLP	24.00 x 24.00 x 6.00 610 x 610 x 152	304	A24P24	A24P24G	A24P24SS6	21.00 x 21.00 533 x 533	3.00 76	5	Small
A24H2406SS6LP	24.00 x 24.00 x 6.00 610 x 610 x 152	316L	A24P24	A24P24G	A24P24SS6	21.00 x 21.00 533 x 533	3.00 76	5	Small

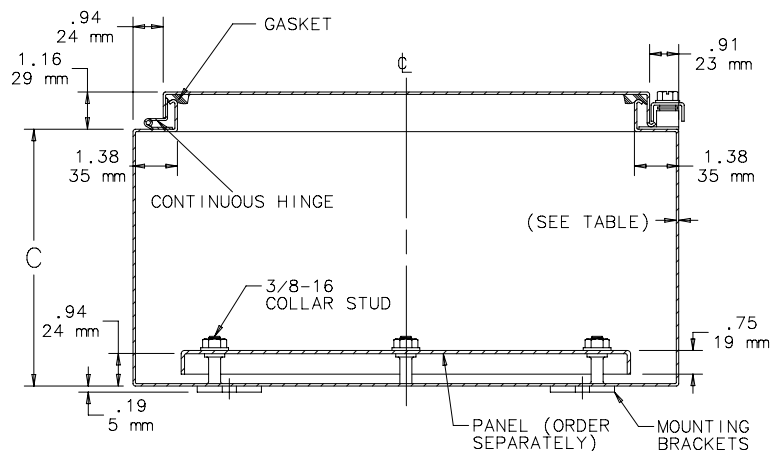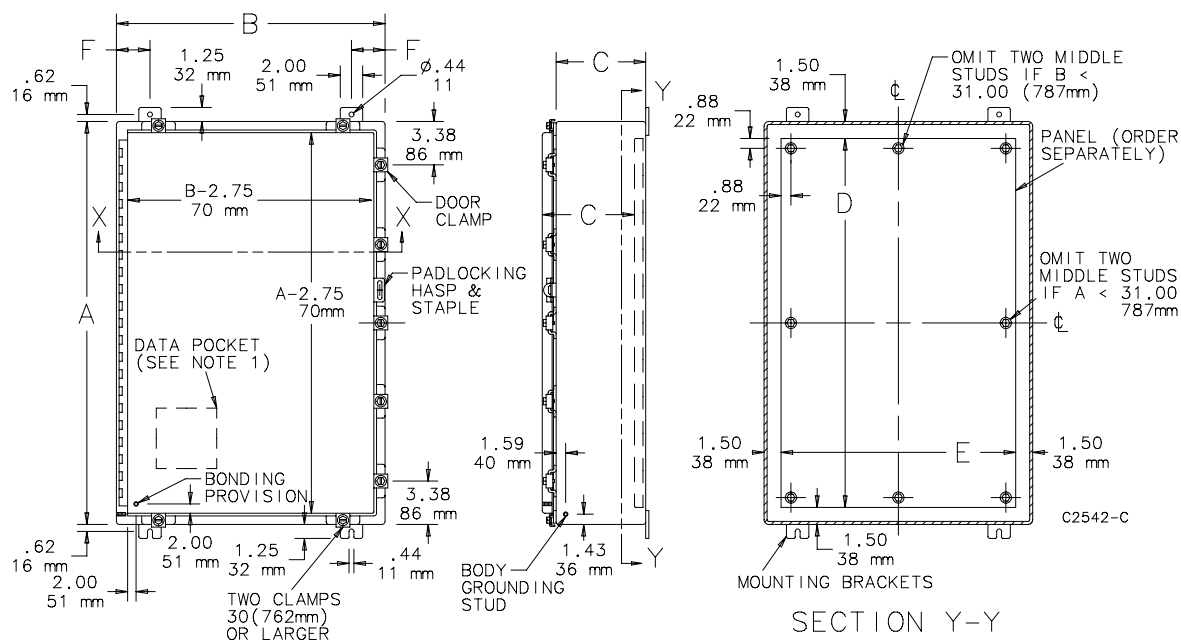

NOTE:

1. Removable data pocket included (see table for size). Large data pocket 12.00 x 12.00 (305mm x 305mm); small data pocket 6.00 x 6.00 (152mm x 152mm).
2. Maximum spacing between door clamps is 15.00 (382mm).

SECTION X-X