

FREE-STAND WITH CONTINUOUS HINGE AND CLAMPS, TYPE 4



INDUSTRY STANDARDS

UL 508A Listed; Type 4, 12; File No. E61997
cUL Listed per CSA C22.2 No. 94; Type 4, 12; File No. E61997

NEMA Type 3, 4, 12, 13
CSA, File No. 42186, Type 4, 12
E.I.A. RS310D
IEC 60529, IP66

APPLICATION

These enclosures are ideal for mounting equipment on panels or racks in indoor or outdoor applications where it is necessary to protect controls and instrumentation from wet, non-corrosive environments.

SPECIFICATIONS

- 12 gauge steel
- Seams continuously welded and ground smooth; no holes or knockouts
- Internal mounting channels welded horizontally at top, bottom and center
- Panels and rack-mounting angles can be mounted anywhere along channels
- Return flange around three sides of door and along enclosure opening excludes liquids and contaminants
- Stainless steel door clamps assure water-tight seal
- Hasp and staple provided for padlocking
- Data pocket is high-impact thermoplastic
- Lifting eyes for easy handling
- Oil-resistant door gasket
- Bonding provision on door
- Provision for mounting fluorescent light

FINISH

ANSI 61 gray polyester powder paint inside and out over pretreated surfaces. Optional panels have white or conductive finish.

ACCESSORIES

Panels
 PANELITE Enclosure Lights
 Floor Stand Kit
 SPECTRACOOOL Indoor/Outdoor
 HF Side-Mount Filter Fans
 Steel, Stainless Steel and Non-Metallic Window Kits
 Electric Heaters
 HOL-SEALERS Hole Seals
 INTERSAFE Data Interface Ports, Type 4/4X/12




MODIFICATION AND CUSTOMIZATION

Hoffman excels at modifying and customizing products to your specifications. Contact your local Hoffman sales office or distributor for complete information.


BULLETIN: A4L

Standard Product


Catalog Number	AxBxC in./mm	X in./mm	Number of Rack Units
A72H2518FS	72.06 x 25.06 x 18.06	6.38	35
	1830 x 637 x 459	162	
A72H3124FS	72.06 x 31.06 x 24.06	8.38	35
	1830 x 789 x 611	213	
A72H3724FS	72.06 x 37.06 x 24.06	10.38	35
	1830 x 941 x 611	264	

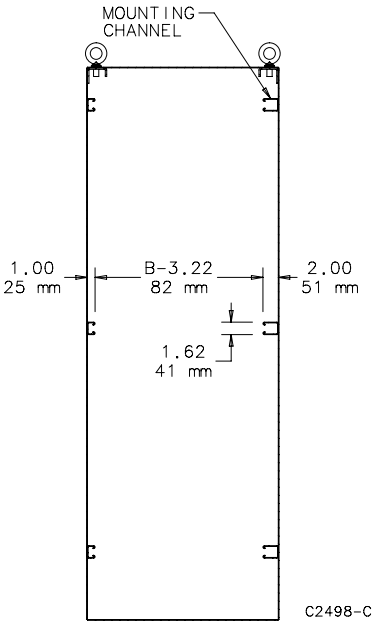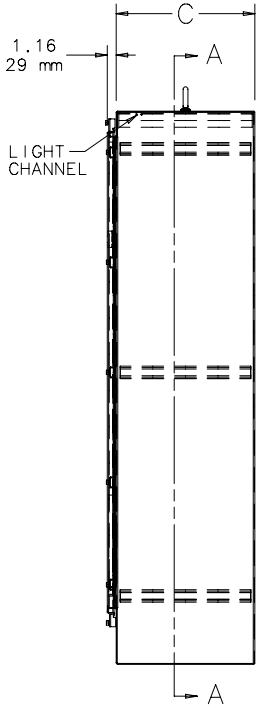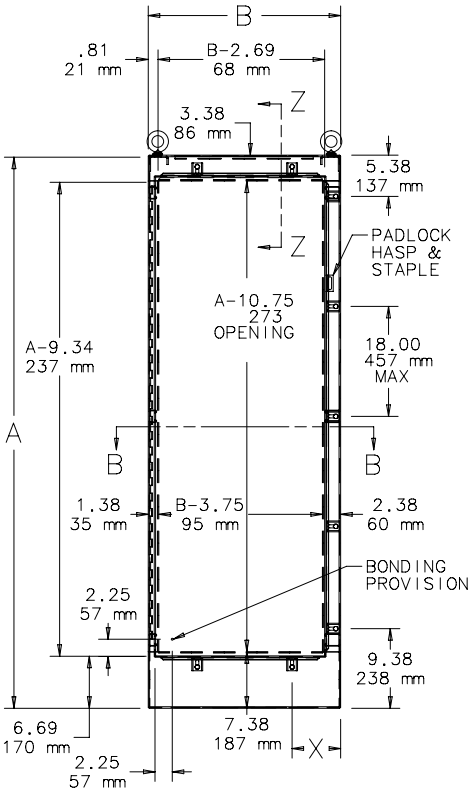

SECTION A-A



SECTION B-B



SECTION Z-Z