



## Circuit Safe® JIC Enclosures

Meets NEMA 1, 3, 3S, 3X, 3SX, 4, 4X, 12, 13.

### Hinged Covers

#### Features:

- Non-metallic mounting feet and all mounting hardware included
- White-painted 14-gauge steel or ¼" PVC back panel (order separately)
- 304 (18-8) stainless steel screws (10-32/1½")
- Lid design provides greater usable internal volume
- Completely non-metallic hinges
- Brass screw inserts
- Temperature range: -30° to 230° F
- Material: polycarbonate molded base and cover

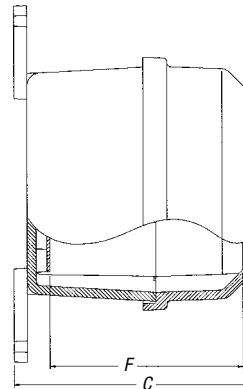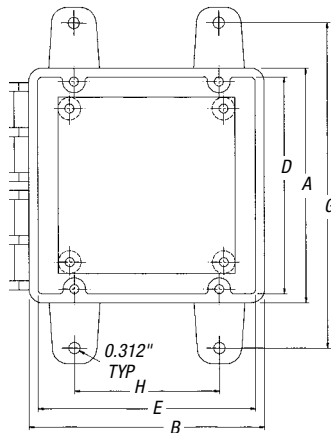

#### Factory Assembled



| OPAQUE COVER<br>CAT. NO. | CLEAR COVER<br>CAT. NO. | DIMENSIONS (IN.) |       |      |          |       |      |          |       | STD. WT.<br>(LBS.)<br>OPAQUE/CLEAR | BACK PANEL* |         | PANEL<br>SIZE (IN.) | STD. WT.<br>(LBS.)<br>STEEL/PVC |
|--------------------------|-------------------------|------------------|-------|------|----------|-------|------|----------|-------|------------------------------------|-------------|---------|---------------------|---------------------------------|
|                          |                         | EXTERNAL         |       |      | INTERNAL |       |      | MOUNTING |       |                                    | CAT. NO.    |         |                     |                                 |
|                          |                         | A                | B     | C    | D        | E     | F    | G        | H     |                                    | STEEL       | PVC     |                     |                                 |
| CJ665                    | CC665                   | 6.50             | 6.50  | 6.69 | 6.00     | 6.00  | 5.45 | 9.00     | 4.00  | 1 (Opa 3.5)/1 (Clr 3.1)            | JP66        | JP66P   | 4.88 x 4.88         | 1 (1.0)/1 (0.3)                 |
| CJ863                    | CC863                   | 8.50             | 6.50  | 4.49 | 8.00     | 6.00  | 3.25 | 11.00    | 4.00  | 1 (Opa 2.8)/1 (Clr 3.1)            | JP86        | JP86P   | 6.75 x 4.88         | 1 (1.0)/1 (0.78)                |
| CJ1085                   | CC1085                  | 10.50            | 8.50  | 6.69 | 10.00    | 8.00  | 5.45 | 13.00    | 6.00  | 1 (Opa 5.2)/1 (Clr 5.2)            | JP108       | JP108P  | 8.75 x 6.88         | 1 (1.5)/1 (0.7)                 |
| CJ12106                  | CC12106                 | 12.50            | 10.50 | 7.69 | 12.00    | 10.00 | 6.45 | 15.00    | 8.00  | 1 (Opa 7.1)/1 (Clr 8.4)            | JP1210      | JP1210P | 10.75 x 8.88        | 1 (2.0)/1 (1.2)                 |
| CJ14126                  | CC14126                 | 14.50            | 12.50 | 7.72 | 14.00    | 12.00 | 6.48 | 17.00    | 10.00 | 1 (Opa 9.0)/1 (Clr 8.6)            | JP1412      | JP1412P | 12.75 x 10.88       | 1 (3.2)/1 (1.7)                 |
| CJ16147                  | CC16147                 | 16.50            | 14.50 | 8.46 | 16.00    | 14.00 | 7.22 | 19.00    | 12.00 | 1 (Opa 10.6)/1 (Clr 11.9)          | JP1614      | JP1614P | 14.75 x 12.88       | 1 (4.7)/1 (2.3)                 |

\*Order back panels separately.

Enclosures shipped with mounting feet, hinge caps and screws.

For factory-installed pad-lockable latch (part no. CJTL), consult Customer Service for price and delivery.