


Model 668RP



- White polymeric grille
- Rectangular fan light
- Fits in 2" x 6" ceiling construction
- 24" adjustable hanger bars
- Mounting brackets that adjust for ceiling thickness up to 3/4"


Models 8663RP & 8664RP

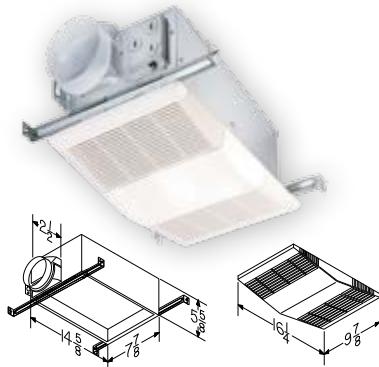

- Round design eliminates squaring with bathroom walls
- Fits 2" x 6" ceiling construction
- 8663RP features bright 100W incandescent lighting with 7W night light for security and safety (bulbs not included)
- 8664RP features bright 100W incandescent lighting (bulb not included)
- 24" adjustable hanger bars


Model	CFM	Sones	Lighting	Finish
668RP	70	4.0	100W	White
8663RP	100	3.5	100/7W	White
8664RP	100	3.5	100W	White

Models 763, 769RL and 769RFT

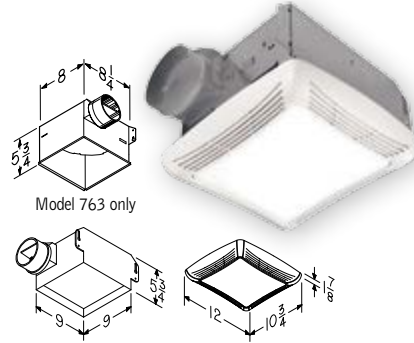


- White polymeric grille
- Fits in 2" x 6" ceiling construction
- 769RFT uses 13W fluorescent bulb (not included)
- All models available in Project Packs

Model 671R & 672R

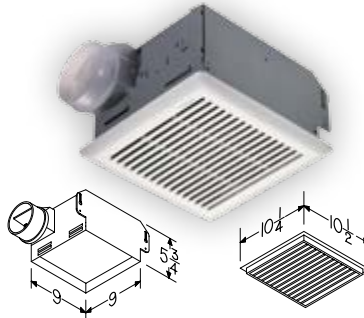

Model 695 & 696N

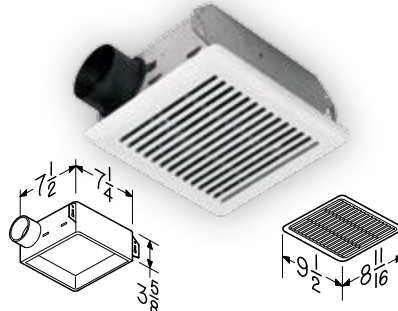


- 50 to 110 CFM centrifugal blower wheel
- Double-strength steel mounting flanges with keyhole slots for fast installation
- Metal grille kits for 695, 696N and Service Part Number S97011308
- UL Listed for use over tub or shower when installed in a GFCI protected branch circuit
- All models available in Project Packs

Model	CFM	Sones	Notes
763	50	2.5	100W White
769RL	70	3.0	100W White
769RFT	70	3.0	13W fluor. White
671R	90	3.0	Wall/Ceiling mount
672R	110	4.0	Wall/Ceiling mount
695	70	6.0	Wall/Ceiling mount
696N	50	4.0	Wall/Ceiling mount


Available in single packs or project packs.

Model 8814R

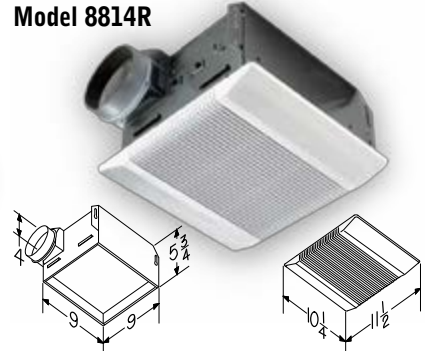

- 110 CFM
- Centrifugal blower wheel and 4-pole motor deliver high exhaust capacity at low sound levels
- Mounting flanges with keyhole slots for fast installation
- White polymeric grille with torsion spring mounting

Model 8832WH

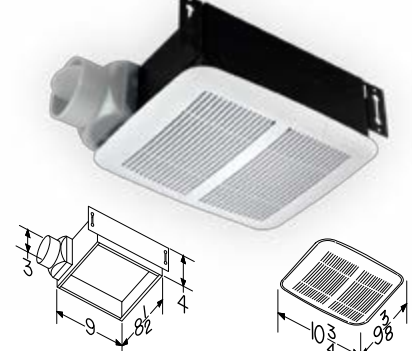

- White polymeric grille with torsion spring mounting
- Fits 2"x4" construction

Model 8832SA



- Silver anodized aluminum grille
- Fits 2"x4" construction

Model	CFM	Sones	Notes
8814R	110	4.0	
8832WH	80	2.5	Not UL tub & shower
8832SA	80	2.5	Not UL tub & shower

Ventilation Fans—Wall Control Selection Guide

		57W, 57V	59W	64W, 64V	66W, 66V	68W, 68V	69WL, 69VL	70TW	72W, 72V	77DW, 77DV	78W, 78V	269WL, 269VL	685WL	CFT12WH	DH100W	VS63WH	VS66WH	VS67WH	VS68WH	VS69WH
Ventilation Fans	50NT, 80NT	•	•	•			•	•	•					•	•					
	671R, 672R		•	•				•						•	•	•				
	682NT		•	•				•						•		•				
	695, 696N	•	•	•				•	•					•	•	•				
	8814R, 8832SA, 8832WH		•	•				•						•	•	•				
	HD50NT, HD80NT	•	•	•			•	•	•					•	•					
	LPN80	•		•			•	•	•					•						
	QT Fans*	•	•	•			•	•	•		•	•		•	•	•				
	QTRN050			•			•				•	•								
	QTXEN110S						•				•									
	RN80, RN110	•	•	•			•	•	•		•	•		•	•	•				
	XN110H					•	•													
	XN50, XN80, XN110			•			•					•		•						
	ZN110H						•													
	ZN80, ZN110					•						•	•							
	ZN80M, ZN110M					•	•													
Ventilation Fan/Lights	668RP	•	•	•		•		•	•					•	•	•	•		•	
	742RBNT	•	•	•		•		•	•			•		•	•		•		•	
	744NT, 744FLNT		•			•		•						•	•		•		•	
	744SFLNT		•			•									•		•		•	
	763, 769RFT, 769RL		•	•		•		•				•		•	•		•		•	
	772RBNT	•	•	•		•		•	•			•		•	•		•		•	
	773RBNT	•	•	•		•		•	•			•		•	•		•		•	
	778WHNT	•		•			•	•	•			•		•						
	791LEDNT	•	•	•		•		•	•			•		•	•		•		•	
	8663RP	•		•	•			•	•			•		•	•			•		•
	8664RP	•	•	•		•		•	•			•		•	•		•		•	
	HD50LNT, HD80LNT	•		•		•		•	•	•		•		•	•	•				
	QT Fan/Lights	•		•	•			•	•			•	•	•	•			•		•
	QTNLEDA, QTNLEDB	•		•	•			•	•				•	•	•			•		•
	QTXEN110SFLT, QTXN110SL		•							•										
	RN80L, RN110L	•		•	•			•	•			•	•	•	•			•		•
	XN110HL				•					•										
	XN50L, XN80L, XN110L				•							•	•	•						
	ZN110HL				•															
	ZN80L, ZN110L									•		•								
	ZN80ML, ZN110ML									•										
Heater/ Fan/Lights	605RP	•	•					•	•							•	•		•	
	665RP		•					•					•			•		•		•
	765HL, 765HFL	•	•		•			•	•						•					
	9412D															•				
	9417DN		•			•		•								•	•		•	
	9422P		•		•	•										•	•		•	
	9427P		•		•			•								•	•	•	•	•
	9905	•	•					•	•							•	•		•	
	9960															•		•		•
	9965							•		•										
	QT9093WH, 9093WH							•		•										
	QTXN110HL, QTXN110HFL	•	•		•			•	•	•										
Utility Fans	8210, 8310, QT200	•	•					•	•						•	•				
	QT300		•					•	•						•	•				

* Does not include models QT200 and QT300.

Ventilation Fans—Product Specifications

Fans

	Page	CFM	Sones HVI certified	Baths up to () Sq Ft	ENERGY STAR®	Duct Size"	Housing Dimensions			Grille Dimensions		Grille finish	Amps
							L"	W"	H"	L"	W"		
110RDB*	28	110	4	105	No	4	8	8¼	5¼	10¼	10¼	White Acrylic Metal	0.6
50NT	26	50	1.5	45	Yes	4	8¼	8	5¼	10½	10¼	White Polymeric	0.2
671R	27	90	3	85	No	4	9	8½	5¼	10½	10¼	White Polymeric	0.5
672R	27	110	4	105	No	4	9	9	5¼	10½	10¼	White Polymeric	0.7
682NT	29	—	—	—	No	—	7½	7½	3¼	8½	8½	White Polymeric	1
690NT	29	60	3	55	No	3	See page 29 for compatible models			9½	8½ ¹⁶	White Polymeric	1.2
695	27	70	6	65	No	3	7½	7¼	3¾	9½	8½ ¹⁶	White Polymeric	1.2
696N	27	50	4	45	No	3	7½	7¼	3¾	9½	8½ ¹⁶	White Polymeric	0.75
80NT	26	80	2	75	Yes	4	8¼	8	5¼	10½	10¼	White Polymeric	0.3
80RDB*	28	80	2.5	75	No	4	8	8¼	5¼	10¼	10¼	White Acrylic Metal	0.6
8814R	27	110	4	105	No	4	9	9	5¼	11½	10¼	White Polymeric	0.85
8832SA	27	80	2.5	75	No	3	8½	9	4	10½	8¾	Silver Anod. Alum	0.75
8832WH	27	80	2.5	75	No	3		8½		10¼	9¾	White Polymeric	0.7
HD50NT	28	50	1.5	45	Yes	4	8	8¼	5¼	10¼	10¼	White Acrylic Metal	0.4
HD50RDB*	28	50	1.5	45	Yes	4	8	8¼	5¼	10¼	10¼	White Acrylic Metal	0.4
HD80NT	28	80	2.5	75	No	4	8	8¼	5¼	10¼	10¼	White Acrylic Metal	0.6
HD80RDB*	28	80	2.5	75	No	4	8	8¼	5¼	10¼	10¼	White Acrylic Metal	0.6
LPN80	26	80	1.0	75	Yes	3–4	8	8¼	5¼	13	14	White Polymeric	0.3
QTREN080	20	80	0.8	75	Yes	4	11¾	10½	7¾	13	14	White Polymeric	0.7
QTREN110	20	110	1.3	105	Yes	4	11¾	10½	7¾	13	14	White Polymeric	0.9
QTRN050	20	50	0.4	45	No	4	11¾	10½	7¾	13	14	White Polymeric	0.4
QTRN080	20	80	1	75	No	4	11¾	10½	7¾	13	14	White Polymeric	0.4
QTRN110	20	110	1.5	105	No	4	11¾	10½	7¾	13	14	White Polymeric	0.3
QTXEN050	20	50	<0.3	45	Yes	6	11¾	10½	7¾	13	14	White Polymeric	0.3
QTXEN080	20	80	0.3	75	Yes	6	11¾	10½	7¾	13	14	White Polymeric	0.4
QTXEN110	20	110	0.7	105	Yes	6	11¾	10½	7¾	13	14	White Polymeric	0.3
QTXEN110S	22	110	0.7	100	Yes	6	11¾	10½	7¾	12¾	13¾	White Polymeric	0.3
QTXEN150	20	150	1.4	140	Yes	6	11¾	10½	7¾	13	14	White Polymeric	0.5
RN80	15	80	<0.3	—	Yes	4	11¾	10½	7¾	13	14	White Polymeric	0.3
RN110	15	110	0.6	—	Yes	4	11¾	10½	7¾	13	14	White Polymeric	0.9
XN50	17	50	<0.3	45	Yes	4–6	10½	11¾	7¾	13	14	White Polymeric	0.1
XN80	17	80	<0.3	75	Yes	4–6	10½	11¾	7¾	13	14	White Polymeric	0.1
XN110	17	110	<0.3	100	Yes	6	10½	11¾	7¾	13	14	White Polymeric	0.2
XN110H	17	110	<0.3	100	Yes	6	10½	11¾	7¾	13¾	14	White Polymeric	0.3
ZN80	17	80	<0.3	75	Yes	4–6	10½	11¾	7¾	13	14	White Polymeric	0.1
ZN80M	17	80	<0.3	75	Yes	4–6	10½	11¾	7¾	13¾	14	White Polymeric	0.1
ZN110	17	110	<0.3	100	Yes	6	10½	11¾	7¾	13	14	White Polymeric	0.2
ZN110H	17	110	<0.3	100	Yes	6	10½	11¾	7¾	13¾	14	White Polymeric	0.3
ZN110M	17	110	<0.3	100	Yes	6	10½	11¾	7¾	13¾	14	White Polymeric	0.3

*Model RDA fan housing only sold separately for radiation dampers/fans.

Fan/Lights

	Page	CFM	Sones HVI certified	Baths up to () Sq Ft	Rooms up to () Sq Ft	Lighting Watts Main/Night Light	ENERGY STAR®	Duct Size"	Housing Dimensions			Grille Dimensions			Grille finish	Amps
									L"	W"	H"	L"	W"	D"		
668RP	27	70	4	65	85	100W	No	4	14¼	7¾	5¾	16¼	9¾	—	White Polymeric	2
742RBNT	34	70	3.5	65	85	2-60W	No	4	8¼	8	5¼	13¾ Dia	5¾	—	Oil-rubbed Bronze	2.2
744FLNT	32	70	1.5	65	85	16W fluor.	Yes	4	8¼	12¾	6¾	7¾ Dia	—	—	White Polymeric	1.2
744LEDNT	32	70	1.5	65	85	14W LED	Yes	4	8¼	12¾	6¾	7¾ Dia	—	—	White Polymeric	0.55
744NT	32	70	1.5	65	85	75W	No	4	8¼	12¾	6¾	7¾ Dia	—	—	White Polymeric	1.2
744SFLNT	32	70	1.5	65	85	16W fluor.	Yes	4	8¼	12¾	6¾	7¾ Dia	—	—	Matte White	0.7
763	27	50	2.5	45	60	100W	No	4	8	8¼	5¼	12	10¼	—	White Polymeric	1.6
769RFT	27	70	3	65	85	13W fluor.	No	4	9	9	5¼	12¼	10¼	—	White Polymeric	1.2
769RL	27	70	3	65	85	100W	No	4	9	9	5¼	12¼	10¼	—	White Polymeric	2
772RBNT	34	80	2	65	85	2-13W	Yes	4	8¼	8	5¼	13¾	6½	—	Oil-Rubbed Bronze	0.8
773BNNT	34	80	2.5	75	75	2-13W	Yes	4	8¼	8	5¼	13¾	5½	—	Brushed Nickel	0.8
778WHNT	26	80	2	75	85	2-13W GU24	Yes	4	8¼	8	5¼	13¾ Dia	—	—	White	0.5
791LEDNT	34	100	1.5	95	125	9W LED	Yes	4	8¾	8¾	5¾	10¾	10¾	—	White	0.5
8663RP	27	100	3.5	95	125	100W/7W	No	4	9	9	5¼	15 Dia	—	—	White Polymeric	1.7
8664RP	27	100	3.5	95	125	100W	No	4	9	9	5¼	15 Dia	—	—	White Polymeric	1.7
HD50LNT	28	50	1.5	45	—	100W	No	4	8	8¼	5	10¾	11¾	2	White Polymeric	1.3
HD80LNT	28	80	2.5	75	—	100W	No	4	8	8¼	5	10¾	11¾	2	White Polymeric	1.7
QTLEDA	33	110	0.7	100	—	2-18W GU24	Yes	6 or 4	11¾	10½	7¾	13¾ SQ	3½	—	White Polymeric	1
QTLEDB	33	110	0.7	100	—	2-18W GU24	Yes	6 or 4	11¾	10½	7¾	13¾ SQ	3½	—	White Polymeric	1
QTREN080FLT	21	80	0.8	75	—	2-18W GU24/4W	Yes	4	11¾	10½	7¾	13	14	—	White Polymeric	1
QTREN110FLT	21	110	1.3	100	—	2-18W GU24/4W	Yes	4	11¾	10½	7¾	13	14	—	White Polymeric	1
QTRN080L	21	80	1	75	—	100W/4W	No	4	11¾	10½	7¾	13	14	—	White Polymeric	1.6
QTRN110L	21	110	1.5	100	—	100W/4W	No	4	11¾	10½	7¾	13	14	—	White Polymeric	1.8
QTXEN080FLT	21	80	0.3	75	—	2-18W GU24/4W	Yes	6	11¾	10½	7¾	13	14	—	White Polymeric	1
QTXEN110FLT	21	110	0.7	100	—	2-18W GU24/4W	Yes	6	11¾	10½	7¾	13	14	—	White Polymeric	1