


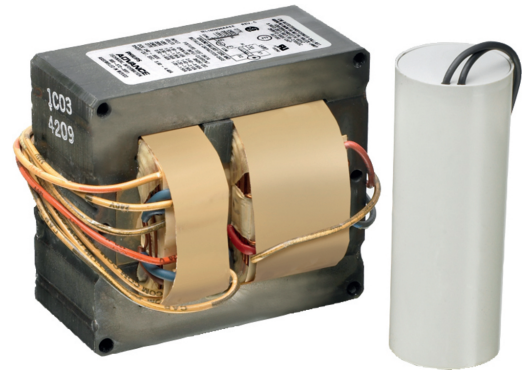

Core & Coil (71A) HPS ~LT~ 200W

CORE & COIL HID HPS BAL 100W S54 QUAD KIT

The basic ballast is the open core and coil which is most often used as a component within a lighting luminaire. The core and coil also forms the nucleus of Philips Advance's five other ballast configurations.

Product data

General Information		Operating and Electrical	
ANSI Code	S54	Input Voltage	120/208/240/277 V
Lamp Type	100W HPS	Input Frequency	60 Hz
Number of Lamps	1 piece/unit	Power (Rated) (Nom)	100 W
Circuit Type	HX-HPF	Inp. Current (Open Circuit)	2.2/1.25/1.1/0.85 A
Ballast Type	Magnetic HID	Input Current (Starting)	0.75/0.45/0.37/0.3 A
Base Model	71A8071	Input Current (Short Circuit)	0.6-0.9/0.35-0.55/0.3-0.45/0.29-0.43 A
Core Size	3 X 4 (2 LW)	Secondary Short Circuit Current	2.6-3.3 A
Suitable For Outdoor Use	Yes	Constant Wattage Deviation	Within Trapezoid
Ignitor Catalog Number	LI551-H4	Ballast Factor (Nom)	1
Ignitor Temperature Rating	105°C	Power Factor (Nom)	0.90
Capacitor Value	10 MFD	Nominal Open Circuit Voltage	125 V
Capacitor Catalog Number	7C100M30RA	Input Current (Operating) (Nom)	1.15/0.67/0.58/0.5 A A
Capacitor Requirements	280V	Input Power (Nom)	135 W
Capacitor Temperature Rating	105°C	Rated Lamp Watts	100W W
Capacitor Diameter/Oval Dimensions	1.65 in	Wiring	
Capacitor Height	2.75 in	Wire Striplength	0.5 mm
Automatic Restart	No	Wire Length By Color	12"
		Wire Type	Stranded

Core & Coil (71A) HPS ~LT~ 200W


Remote Wiring Configuration Allowed	Yes
Max Ballast-Lamp Distance Remote Wiring	2'
Recommended Fuse Value	7/5/3/3 A

Approval and Application

Open Circuit Voltage Test (Volts)	110-130 V
Approbation Marks	ULR CSA certificate RoHS Compliant
Temperature Marking	E/F/E/D
UL Recognized	Yes
Hipot Test (1 Minute)	2000 V
Hipot Test (2 Seconds)	2500 V
UL Insulation Class	H(180°C)
UL Temperature Code	1029F

Product Data	
Order product name	CORE & COIL HID 71A8071001D
EAN/UPC - Product	781087807118
Order code	71A8071001D
Local order code	190371
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	913700556409
Net Weight (Piece)	3.207 kg

Dimensional drawing



HPS BAL 100W S54 QUAD KIT

Product	C1	C2	A1	A2	B1	B2
CORE & COIL HID 71A8071001D	3.45 in	2 in	3.9 in	3.5 in	2.8 in	2.4 in

