

Wall Light

64 Watt LED

Classic Series LED
TRADITIONAL HID REPLACEMENT

Glare Free



WLD64LED

Design is Protected by U.S. Patent No. 9,482,395



LUMENS: 6,966

LUMENS PER WATT: 111

CCT: 4500K

WATTS: 64

CRI: 83

DIMMING: 10-100%

Ordering Information

CATALOG #	DESCRIPTION	VOLTS
WLD64LED	64W LED Wall Light	120-277

Options

ADD SUFFIX #	DESCRIPTION
PC	120V Photocontrol
PM	208-277V Photocontrol
EB	Emergency Back-Up*


*Emergency Back-Up requires larger back housing. Contact Atlas for more details.

Note: Atlas uses only premium LED compatible photocontrols

Performance

- **95% Efficient Reflector Targets the Light**
- **Eliminates Glare & Offensive Light**
- **Less Wasted Light**
- **More Footcandles on the Ground**
- **Creates a Smooth & Uniform Light Pattern**

Recommended Mounting Height - 18-20 ft.

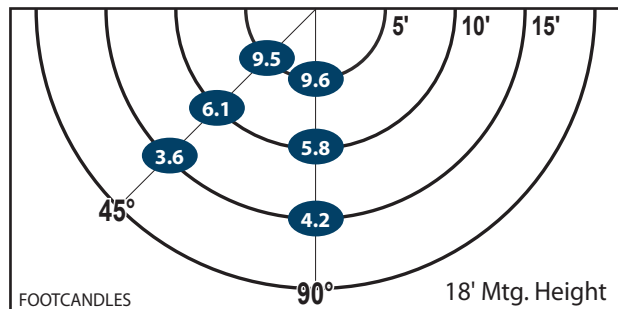


Dimensions and Specifications

Overall Height: 9.01"

Depth: 9.78"

Overall Width: 18.2"

Weight: 15 lbs.

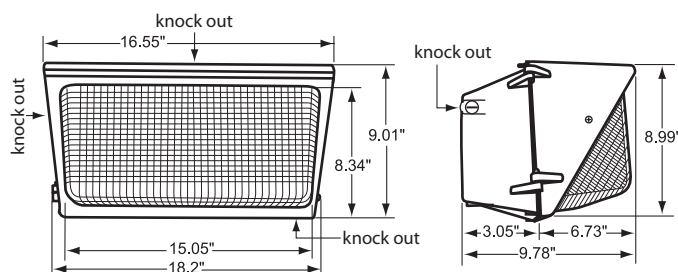

FOOTCANDLES ON THE GROUND							
Mtg. Hgt.	90°			45°			Avg. FCs 450 SQ. FT.
	5'	10'	15'	5'	10'	15'	
18'	9.6	5.8	4.2	9.5	6.1	3.6	6.5
20'	6.8	4.8	3.4	6.6	5.2	3.4	5.0

200,000+ HOURS

