
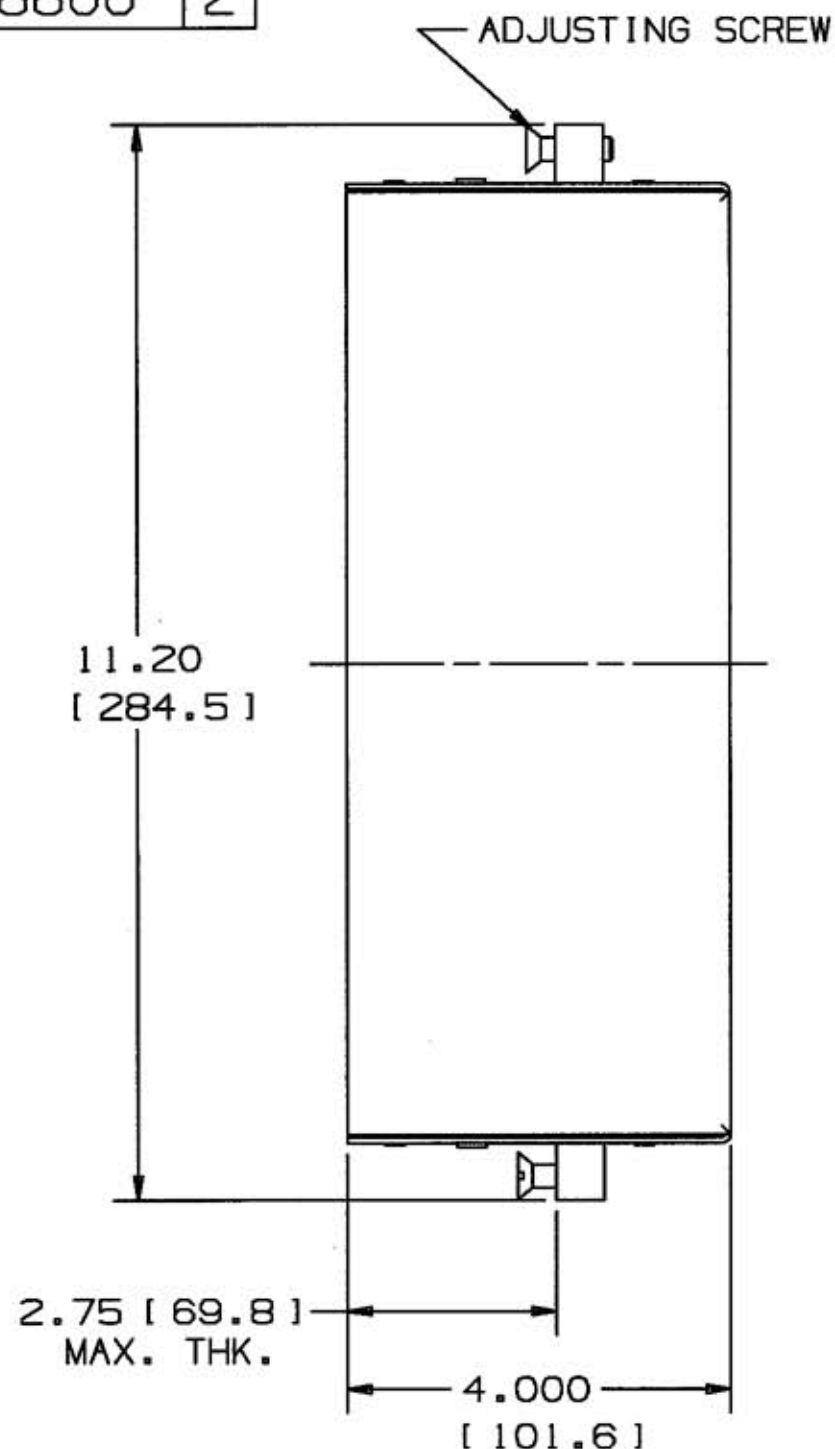
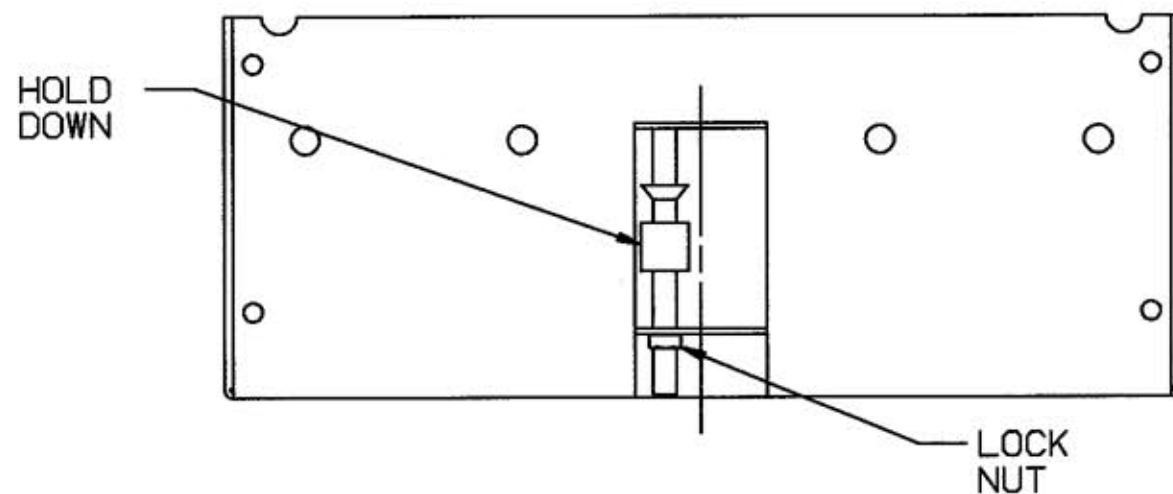


M-8866 2

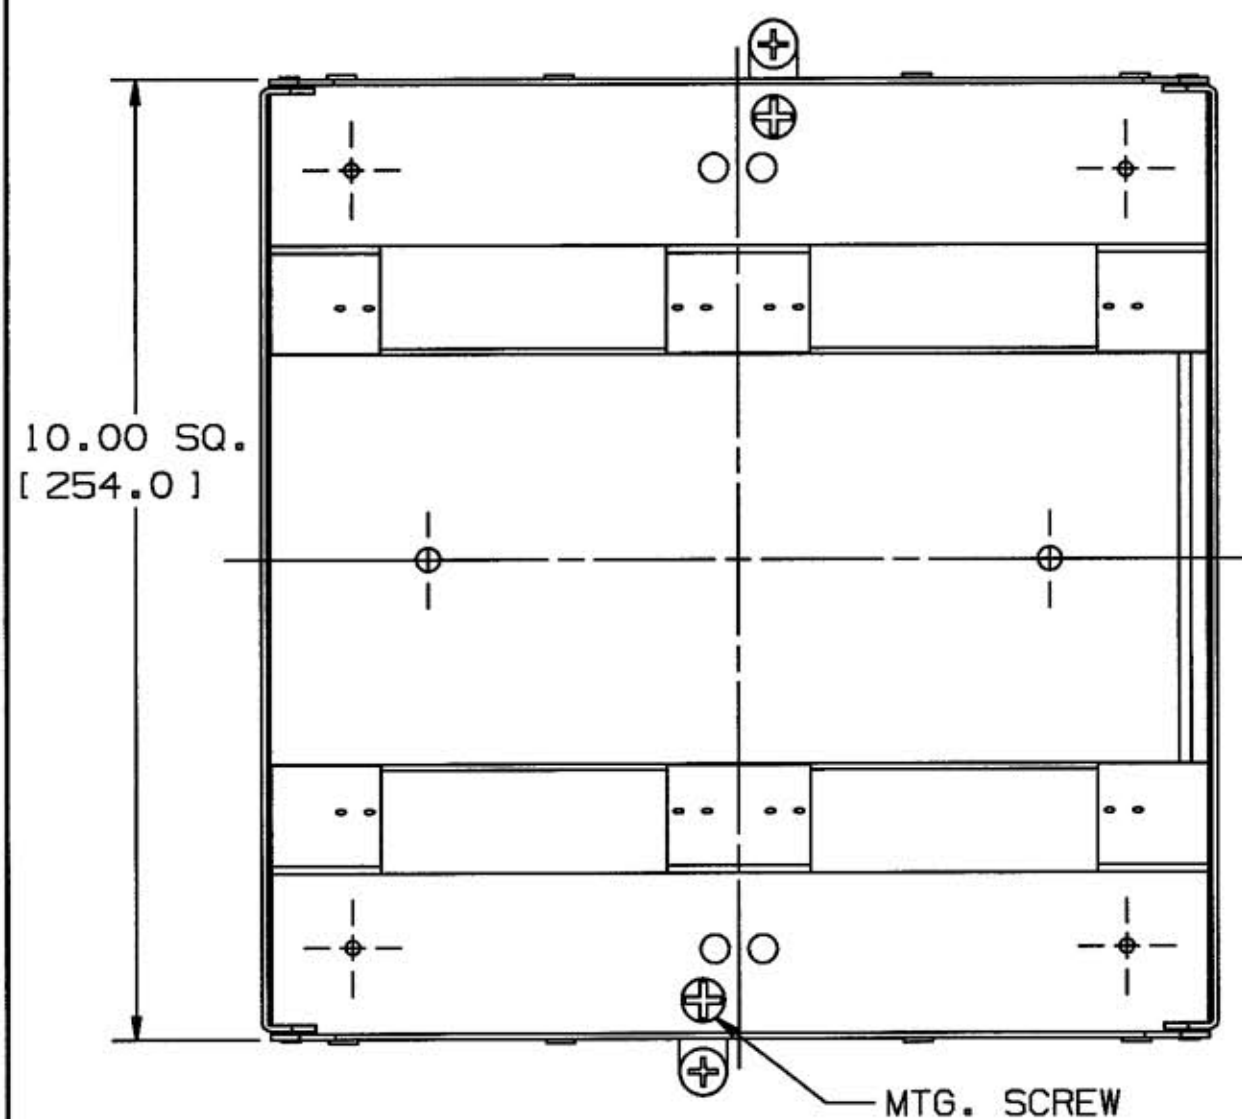

NOTE:

1. REMOVED.
2. DIM'S. INCHES [MM].
3. PRODUCT MUST MEET UL & CSA CONSTRUCTION, PERFORMANCE, & MARKING REQUIREMENTS.
4. THIS PRODUCT IS USED WITH TRIM/COVER PLATE CAT.#HBLTCGNT (SEE M-8607)
5. 4 GANG - 4 CHANNEL, CUBIC IN. CAPACITY (cm³):
WIRING CHAMBERS= 4 X 29.5 (4 X 483)
PLUG ACCESS= 165 (2700) TOTAL= 283 (4632)
6. MUST MEET CONSTRUCTION REQUIREMENTS CCEA-2000.
THIS PRODUCT IS CITY OF CHICAGO APPROVED.

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BOX	STEEL .0625 THK	PRE-GALV.
FL. HD. ADJ. SCREW	STEEL	ZINC PL.
RD. HD. MTG. SCREW	STEEL	ZINC PL.
HOLD DOWN	ALUMINUM	
HEX LOCK NUT	STEEL	ZINC PL.

2	REVISED NOTE 4; REMOVED NOTE 1 PER DCN 13264 RCM	JPP	7/27/06
1	INITIAL RELEASE #9545	JVD	6-25-02
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE 4 GANG DEEP
CUSTOMER DRAWING
RAISED ACCESS FLOOR BOX
HBLAFB301BASEC

TOLERANCES UNLESS
OTHERWISE SPECIFIED
FRACTIONS ± 1/64
DECIMALS ± .005
ANGLES ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY	PAC	APP. BY	JVD
TR. BY		SCALE	HALF
CHK'D BY		DATE	6-24-02