

Twist-Lock® Devices

50A, 3 Phase 480V AC, 3 Pole, 4 Wire Grounding

Flanged Inlet



Features

- Metallic flanged casing provides maximum strength and protection
- Thermoset interior provides superior heat resistance

Ordering Information

Description	Device Style	UPC	Catalog Number
Zinc plated steel casing, thermoset interior	Metallic	783585828602	CS8175

Listings


Listed to UL 498
Certified to CSA C22.2 No.42

Specifications

Casing	Steel, zinc plated
Terminal Retainer	Phenolic
Blades	Brass
Terminal Screws	Steel

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accommodation	#10 AWG - #4 AWG solid or stranded copper wire only
Environmental	
Flammability	UL 94 V0
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

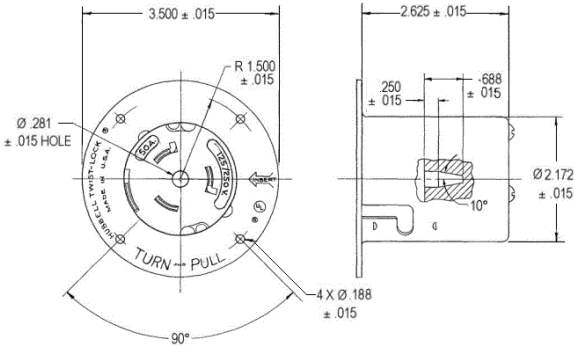

Accessories

Connector	CS8164C
-----------	---------

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

