
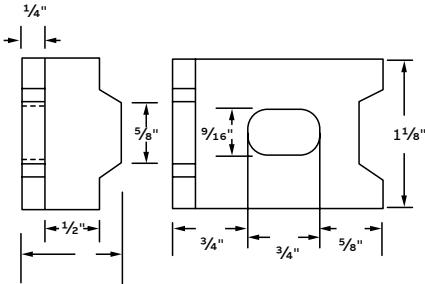


Beam clamps and hanger rod supports

Channel to beam clamp, channel support & channel hangers

E-763 Channel to beam clamp

Cat. No.	Design load (lbs/EA)	Weight (lbs/C)
E-763	500	25





Secures all sizes of Kindorf® channel to beams where flange edge does not exceed .8" thickness.

Load rating each clamp 800 lbs. with a safety factor of 3. Assembly requires one H-113-E bolt and one B-910-1/2 steel nut per clamp – order separately.
1/4" steel. Galv-Krom® finish.

E-767 Channel support

Cat. No.	Design load (lbs/EA)	Weight (lbs/C)
E-767	800	44





Supports any size Kindorf® channel. Clamps to I-beam where flange edge does not exceed .8" thickness.

Load rating each clamp 800 lbs. with a safety factor of 3.
1/4" steel. Galv-Krom® finish.

G-962 and G-962-D Channel hangers

Cat. No.	Weight (lbs/C)	Hanger size (in)	Dim. A (in)
G-962-D-1	47	1/4 and 3/8 rod	1 3/32
G-962-D-2	47	1/2 rod and 1/4 pipe	9/16
G-962-D-3	47	3/8 pipe and 3/8 rod	1 1/16
G-962-D-4**	47	1/2 pipe	7/8

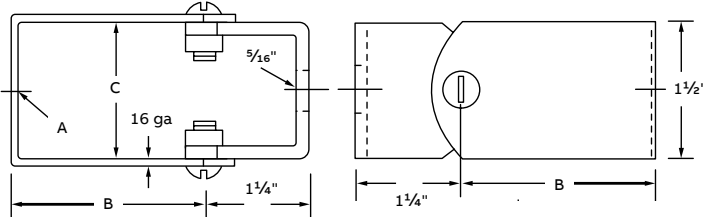

G-962 fits around 1 1/2" or 1 5/8" deep channel,
G-962-D series hangers for 3" deep channel.

** Load rating of 700 lbs. with a safety factor of 3. "B" dimension for G-962: 2 1/8"; for G-962-D: 4". UL® Listed for raceway. "C" dimension for G-962, 1 3/16", for G-962-D, 3 7/64". Galv-Krom® finish.