

SPECIFICATION & FEATURES

STEEL EMT CONNECTORS COMPRESSION TYPE 1/2" ~ 4"

DESCRIPTION:

Orbit Industries compression connectors are used to bond EMT thinwall conduits to electrical junction boxes or enclosures. The steel construction ensures mechanical protection and the conduit to the designated electrical junction box or enclosure. In damp locations, compression connectors are also of excellent corrosion protection with zinc electroplated. With Orbit Industries' labor saving design, electrician can quickly tighten these connectors on EMT conduits.



CERTIFICATION:

UL file E310660, conforms to UL 514B (1/2" ~ 2")



UL file E310658, conforms to UL 514B (2-1/2" ~ 4")

FEATURES:

- Steel
- Zinc Electro-Plated
- Concrete-Tight
- Suitable for applications above 600V

LINE DRAWINGS:

1/2" ~ 4"

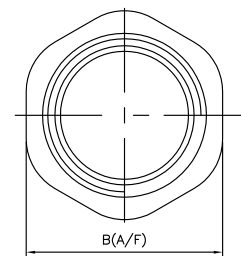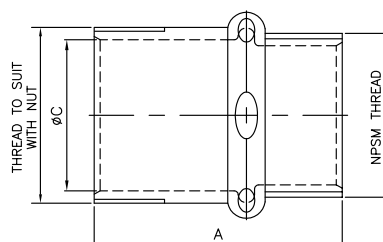

CONFIGURATION DATA:

Part No.	Trade Size	A (in)	B (in)	C (in)	Std.Pkg.	Master Ctn.
OF7601	1/2"	1.378	0.965	0.732	25	250
OF7602	3/4"	1.535	1.201	0.949	25	250
OF7603	1"	1.811	1.465	1.189	10	100
OF7604	1-1/4"	1.929	1.823	1.535	10	100
OF7605	1-1/2"	2.205	2.075	1.768	10	50
OF7606	2"	2.638	2.559	2.224	5	50
OF7607	2-1/2"	3.268	3.327	2.921	-	12
OF7608	3"	3.465	3.886	3.543	-	12
OF7609	3-1/2"	3.819	4.37	4.047	-	6
OF7610	4"	3.976	4.941	4.547	-	6

