

Data sheet

3RT1926-2GC51

SOLID-STATE, TIME-DELAYED AUXILIARY SWITCH
BLOCK SETTING RANGE 1.5 S...30 S, AC 100...127 V,
2NO, STAR-DELTA FUNCTION, FOR MOUNTING
ONTO CONTACTORS, SIZE S0...S12



Figure similar

General technical data:		
product brand name		SIRIUS
Product designation		auxiliary switch
Size of contactor can be combined company-specific		S0 ... S12
Product function		
• star-delta circuit		Yes
• at the relay outputs Switchover delayed/without delay		No
Product component semi-conductor output		No
Product extension		
• optional remote control		No
• required remote control		No
Adjustable time	s	1.5 ... 30
Ambient temperature during operation	°C	-25 ... +60
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		K
Equipment marking acc. to DIN EN 61346-2		K

Switching Function:**Switching function**

- ON-delay
- passing make contact
- fixed clock cycle beginning with pulse
- fixed clock cycle beginning with interval
- OFF delay
- variably clocked start with impulse
- variably clocked start with interval
- with control signal
 - additive ON delay
 - passing break contact
 - OFF delay

No
No
No
No
No
No
No
No
No

Auxiliary circuit:**Number of NC contacts**

- delayed switching
- instantaneous contact

0
0

Number of NO contacts

- delayed switching
- instantaneous contact

1
1

Number of CO contacts

- delayed switching
- instantaneous contact

0
0

Installation/ mounting/ dimensions:**Width**

mm

33

Height

mm

46

Depth

mm

73

Connections/ Terminals:**Type of electrical connection**

- for auxiliary and control current circuit

screw-type terminals

Certificates/ approvals:

General Product Approval				Declaration of Conformity	Test Certificates
 CCC	 CSA	 UL		 EG-Konf.	spezielle Prüfbescheinigungen n

Shipping Approval					
 ABS	 BUREAU VERITAS	 DNV	 GL	 LRS	 PRS

Shipping Approval	other		
 RINA	 RMRS	Bestätigungen	Umweltbestätigung sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1926-2GC51>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1926-2GC51>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1926-2GC51&lang=en

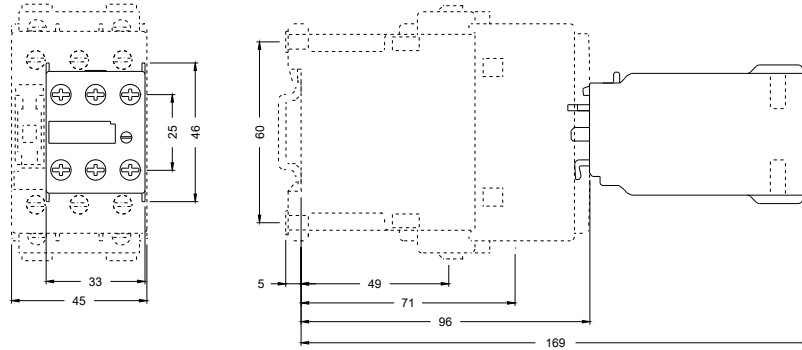

last modified:

01/17/2017