

52®/53® Series Liquidtight Fittings and Flexible Metallic Conduits

Sealing material resists oil, coolants and hydraulic fluids as well as water!

Liquidtight Sealing Gasket

The 5262 Series Sealing Gasket includes a stainless steel retaining ring to prevent elongation of the Santoprene® gasket, ensuring a superior seal.

Application

- When used with an externally threaded connector, provides a tight seal against oil, fumes or moisture at the knockout opening

Features

- Design locks resilient sealing material in steel
- Steel retainer protects seal from extruding out under torque and limits compression to an optimum predetermined value; provides high-quality seal
- Resilient material flows and seals rough surfaces
- NEMA 3R, 4, 6 and 13

Standard Material


Retainer316 Stainless Steel

Sealing Material.....Santoprene®


Thermoplastic Rubber

Range

1/4" thru 4" Hub Size



5262 Series Sealing Gasket

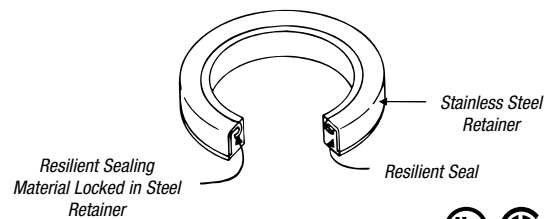

CAT. NO.	CONDUIT SIZE	DIMENSIONS (IN.)		STD. PKG. QTY.
		A	B	
5299**	1/4"	.80	.11	50
5261**	3/8"	.95	.11	50
5262	1/2"	1.16	.18	50
5263	3/4"	1.49	.19	25
5264	1"	1.75	.19	25
5265	1 1/4"	2.15	.22	5
5266	1 1/2"	2.42	.23	5
5267	2"	2.92	.23	5
5268	2 1/2"	3.44	.23	5
5269	3"	4.08	.23	5
5270	4"	5.29	.31	5


** UL not applicable.

UL File No. E 13938 CSA File No. 2884

Santoprene is a registered trademark of Advanced Elastomer Systems.

Provides a re-usable rain-, dust- and oil-tight seal for unused knockouts!

Liquidtight K.O. Plug



- No need to replace a NEMA 3R, 4, 6 or 13 box when a knockout is no longer used
- No tools needed to install — just push into knockout hole, and plug snaps in
- Made of flame-retardant Neoprene
- Meets UL 514 flammability test and NEMA 3R, 4, 6 and 13 requirements
- Temperature range — 30° C to 105° C

CAT. NO.	SIZE	A
5710	1/2"	1 1/32"
5711	3/4"	1 1/2"
5712	1"	1 27/32"
5713	1 1/4"	2 7/32"
5714	1 1/2"	2 1/2"
5715	2"	3 3/32"
5716	2 1/2"	3 21/32"
5717	3"	4 19/64"
5718	4"	5 19/64"

UL Listed raintight.

Meets Coast Guard Regulation CG293.

UL File No. E 13938

CSA File No. 2884

Bushings, Nipples, Locknuts and Plugs

Perfect for grounding old work or new!

Bonding & Grounding Wedges

- Provides grounding without a jumper except in concentric knockouts
- When jumper is required, it fits under set screw in grounding wedge
- Update existing installations to meet code requirements for bonding (NEC® Article 250, Part V) without disconnecting wiring
- For use on new wiring, just loosen bushing, position wedge and tighten bushing and bonding screw

Application

- To effectively bond terminating fitting or conduit to a box or enclosure

Features

- Sizes ¾" thru 6" equipped with an additional bonding screw to install bonding jumper where required
- Can be added to an existing installation without disconnecting conductors

Standard Material/Finish

½" size Steel/Electro Zinc Plated

¾" thru 6" size Bronze/Tin Plated

Listings/Compliances

UL File #E3060

CSA File #638

UL 467


CSA C22.2 No. 41

NFPA-70


Federal Specification A-A-50552

Range

½" thru 6" conduit



Series 3650



Series 3651



Grounding Wedges

CAT. NO.	SIZE
3650	½"
3651	¾"
3652	1"
3653	1¼"
3654	1½"
3655	2"
3656	2½"
3657	3"
3658	3½"
3659	4"
3661	5"
3662	6"

UL File No. E-3060



Sealing material resists oil, coolants and hydraulic fluids as well as water!

Liquidtight Sealing Gasket

The 5262 Series Sealing Gasket includes a stainless steel retaining ring to prevent elongation of the Santoprene® gasket, ensuring a superior seal.

Application

- When used with an externally threaded connector, provides a tight seal against oil, fumes or moisture at the knockout opening

Features

- Design locks resilient sealing material in steel
- Steel retainer protects seal from extruding out under torque and limits compression to an optimum predetermined value; provides high quality seal
- Resilient material flows and seals rough surfaces
- NEMA 3R, 4, 6 and 13


Standard Material

Retainer: 316 Stainless Steel


Sealing Material: Santoprene®
Thermoplastic Rubber

Range

¼" thru 4" Hub Size



5262 Series Sealing Gasket



Resilient Sealing Material Locked in Steel Retainer

Stainless Steel Retainer

Resilient Seal



CAT. NO.	CONDUIT SIZE	DIMENSIONS (IN.)		STD. PKG. QTY.
		A	B	
5262	½"	1.16	.18	50
5263	¾"	1.49	.19	25
5264	1"	1.75	.19	25
5265	1¼"	2.15	.22	5
5266	1½"	2.42	.23	5
5267	2"	2.92	.23	5
5268	2½"	3.44	.23	5
5269	3"	4.08	.23	5
5270	4"	5.29	.31	5

UL File No. E 13938 CSA File No. 2884

Santoprene is a registered trademark of Advanced Elastomer Systems.